

# SILK SBC LED LIGHTBAR ACCESSORIES



24V Direct Plug-In LED Drivers

<b>NATL-524</b>	24V 24W
<b>NATL-545</b>	24V 45W
<b>NATL-596</b>	24V 96W

Allows direct connection to a wall outlet with 6' cord and plug (NATL-524 and 545) or 5' cord and plug and 44" power line connector (NATL-596). Requires power line interconnection cable. Non-Dimmable.



24V Class II Hardwire Electronic LED Driver

<b>NATL-530HW</b>	24V 30W
<b>NATL-560HW</b>	24V 60W

Allows hardwiring using NUSP-JBox. Can be converted into direct plug-in driver using NRA-6035. Requires power line interconnection cable.



24V Class II Hardwire Electronic LED Driver

<b>NATL-5060HW</b>	24V 60W
<b>NATL-5100HW</b>	24V 100W

Can be used with Nora LED Tape, Light Bar and Puck. Allows hardwiring. Includes 10' power line connector (NATL-10). Non-dimmable.  
**NATL-5096-24-HWD10**  
24V 96W Electronic 0-10V Dimmable driver. Includes NATL-10



Dimmable 24V Class II Remote Hardwire Magnetic Drivers

<b>NMTD-60/24D</b>	24V 60W
<b>NMTD-96/24D</b>	24V 96W

With integral regulator for constant current and voltage. Includes 10' Power Line Connector (30' ordered separately).



Flexible Extension Cord for NATL-530HW or NATL-560HW Drivers

<b>NRA-125/6</b>	6"
<b>NRA-125/12</b>	12"
<b>NRA-125/18</b>	18"
<b>NRA-125/72</b>	72"

Used to extend length between NUSP-JBox and NATL-530HW or NATL-560HW. Can be joined together to create custom lengths.



Cord and Plug for NATL-530HW or NATL-560HW

<b>NRA-6035W/6</b>	6'
<b>NRA-6035W/10</b>	10'

Used to convert NATL-530HW or NATL-560HW into a direct plug-in driver.



Replacement Power Line Connector

<b>NATL-10</b>	10' 24V
<b>NATL-30</b>	30' 24V

For use with NMT Series and NATL-5100HW. Replaces included 10' lead wire, to allow for 30' or less length between Lightbar PLUS run and LED Driver.



NUSP-JBox

Junction Box for Hardwiring Required for hardwiring NATL-530HW or NATL-560HW. Can be used to feed to separate runs. Accepts Romex®.



Low Voltage Splice Box

**NATL-415**

Use to join Romex® low voltage lead to power line connector.




In-Wall Rated Wire

<b>NATL-W16-2-250</b>	16AWG 250'
<b>NATL-W16-2-20</b>	16AWG 20'

16 AWG low voltage Class II two-conductor, in-wall rated wire.

# LED TAPE LIGHT

## STANDARD WET / DAMP / SIDE-LIT ACCESSORIES & DRIVERS



"Y" Splitter Cable

**NATL-300** 12V or 24V  
Allows splitting the Tape Light from a run or driver, into two separate runs.



X-Splitter Cable

**NATL-301** 12V or 24V  
Allows splitting the Tape Light from a run or driver, into three separate runs.



12/24V Interconnection Cables

**NATL-202** 2" Cable  
**NATL-206** 6" Cable  
**NATL-218** 18" Cable  
**NATL-236** 36" Cable  
**NATL-272** 72" Cable

Allows easy linking of two Tape Light sections. Cables are flexible and can be moved in any direction, or be joined together for custom lengths.



Power Line Interconnector

**NATL-509** 24V 9" Cable

**NATL-515** 12V 9" Cable

Connects any Tape Light run to a driver. (1) Power line interconnector is included with every Tape Light roll.




Power Line Interconnector with On/Off Switch

**NATL-511** 24V 11" Cable

**NATL-517** 12V 11" Cable

Allows individual switching on any Tape Light run, and connect LED Tape Light run directly to LED Driver.



24V Power Line Splitter

**NATL-302** 5" Cable

One split into two lines



Power Line Connector

**NAPK-10** 12V 10' Cable

**NAPK-30** 12V 30' Cable

**NALTL-10** 24V 10' Cable

**NALTL-30** 24V 30' Cable

For use with NMT Series Class II LED Driver. Replaces included 10' lead wire, to allow for 30' or less length between run and LED Driver.



Shrink Wrap Tube

**NATL-400** Pack of 5

Seals connection made in the field. Necessary to maintain ETL Wet Listing. Two shrink wrap tubes are included with every Tape Light roll and section.



End Cap

**NATL-403**

Covers open end of RGB Tape Light.



Clear Acrylic Mounting Clips

**NATHR-685** Pack of 15

Use in conjunction with adhesive backing to attach Tape Light to a surface. Pack of 15 clear acrylic mounting clips are included with every RGB Tape Light roll.



Hardwired Class II EI. Driver Non-Dimmable

**NAPK-530HW/12** 12V 30W

**NAPK-560HW/12** 12V 60W

**NATL-530HW** 24V 30W

**NATL-560HW** 24V 60W

**Voltage:** 12V or 24V DC

**Cable Length:** 3-1/4"

**Input Wire:** 4"

**Requires:** NUSP-JBox for hardwire or NRA-6035 for plug in application; Power line interconnector cable to connect to Tape Light run.



Direct Plug-In EI. Driver Non-Dimmable

**NAPK-524/12** 12V 24W

**NATL-524** 24V 24W

**NATL-545** 24V 45W

**Voltage:** 12V or 24V DC

**Cable Length:** 6 Feet

**Requires:** Power line interconnector cable to connect to Tape Light run.



Class II Elec. LED Driver Non-Dimmable

**NATL-596** 24V 96W

**NAPK-550/12** 12V 50W

**Input Wire:** 5' Cord and Plug

**Output Wire:** 44" Out Wire



12V Class II Hardwire Magnetic Driver Non-Dim

**NMT-244/12C2D1\*** 4x60W

**NMT-36/12C2D1** 36W

**Voltage:** 12V DC

**\*Includes:** (4) 10' Power Line Connectors (30' ordered separately)

**Dimmable**

**NMT-303/24/C2D1** 3x100W



24V Class II Electronic LED Driver Non-Dimmable

**NATL-5060HW** 60W

**NATL-5100HW** 100W

**Dimmable (0-10V)**

**NATL-5060-12HWD10** 12V 60W

**NATL-5096-24HWD10** 24V 90W

Includes hardwire box and 10' Power Line Connector

# LED TAPE LIGHT

## HY-BRITE / HIGH OUTPUT ACCESSORIES AND DRIVERS



Y-Splitter Cable

**NAHO-600** Y Cable  
Allows splitting Hy-Brite & High Output Tape light from a run or driver into two or three separate runs.



X-Splitter Cable

**NAHO-601** X Cable  
Allows splitting Hy-Brite & High Output Tape light from a run or driver into two or three separate runs.



Interconnection Cables

**NAHO-602** 2" Cable  
**NAHO-606** 6" Cable  
**NAHO-618** 18" Cable  
**NAHO-636** 36" Cable  
**NAHO-672** 72" Cable

Interconnection cable allows easy linking of two Hy-Brite or High Output Tape sections. Cables are flexible and can be moved in any direction, or be joined together for custom lengths.




Power Line Interconnector

**NAHO-609**  
Connects Hy-Brite or High Output Tape Light run to a driver. (1) Power line interconnector is included with every Hy-Brite and High Output Tape Light roll.



Power Line Interconnector with On/Off Switch

**NAHO-611**  
Allows individual switching on any Hy-Brite and High Output Tape Light run, and connect the LED tape light run to an LED driver.



24V Power Line Splitter

**NATL-302** 5" Cable  
One split into two lines



Power Line Connector

**NATL-10** 10' Cable  
**NATL-30** 30' Cable  
Used with NMT Series Class II LED Driver. Replaces included 10' lead wire, to allow for 30' or less length between run and LED Driver.



Shrink Wrap Tube

**NATL-400** Pack of 5  
Seals connection made in the field. Necessary to maintain ETL Wet Listing. Two shrink wrap tubes are included with every Tape Light roll and section.



End Cap

**NATL-403**  
Covers open end of RGB Tape Light.



Clear Acrylic Mounting Clips

**NATHR-685** Pack of 15  
Use in conjunction with adhesive backing to attach Tape Light to a surface. Pack of 15 clear acrylic mounting clips are included with every RGB Tape Light roll.



Hardwired Class II EI. Driver Non-Dimmable

**NATL-530HW** 24V 30W  
**NATL-560HW** 24V 60W

Voltage: 24V DC  
Cable Length: 3-1/4"  
Input Wire: 4"

\*Requires: NUSP-JBox for hardwire or NRA-6035 for plug in application; Power line interconnector cable to connect to Tape Light run.



Direct Plug-In Elect. Driver Non-Dimmable

**NATL-524** 24V 24W  
**NATL-545** 24V 45W

Voltage: 24V DC  
Cable Length: 6 Feet

Requires: Power line interconnector cable to connect to Tape Light run.



Class II Electronic LED Driver Non-Dimmable

**NATL-596** 96W

Voltage: 24V DC  
Input Wire: 5' Cord and Plug  
Output Wire: 44" Out Wire



24V Class II Electronic LED Driver Non-Dimmable

**NATL-5060HW** 60W  
**NATL-5100HW** 100W

Dimmable (0-10V)  
**NATL-5096-24HWD10** 96W

Includes hardwire box and 10' Power Line Connector



12V & 24V Class II Hardwire Magnetic Driver Dimmable

**NMTD-60/24D** 24V 60W

**NMTD-96/24D** 24V 96W


**NTM-303/24C2D1** 3x100W

Voltage: 24V DC

\*Includes: (3) 10' Power Line Connectors (30' ordered separately)

# LED TAPE LIGHT

## RGB COLOR CHANGING SAMPLE LAYOUT

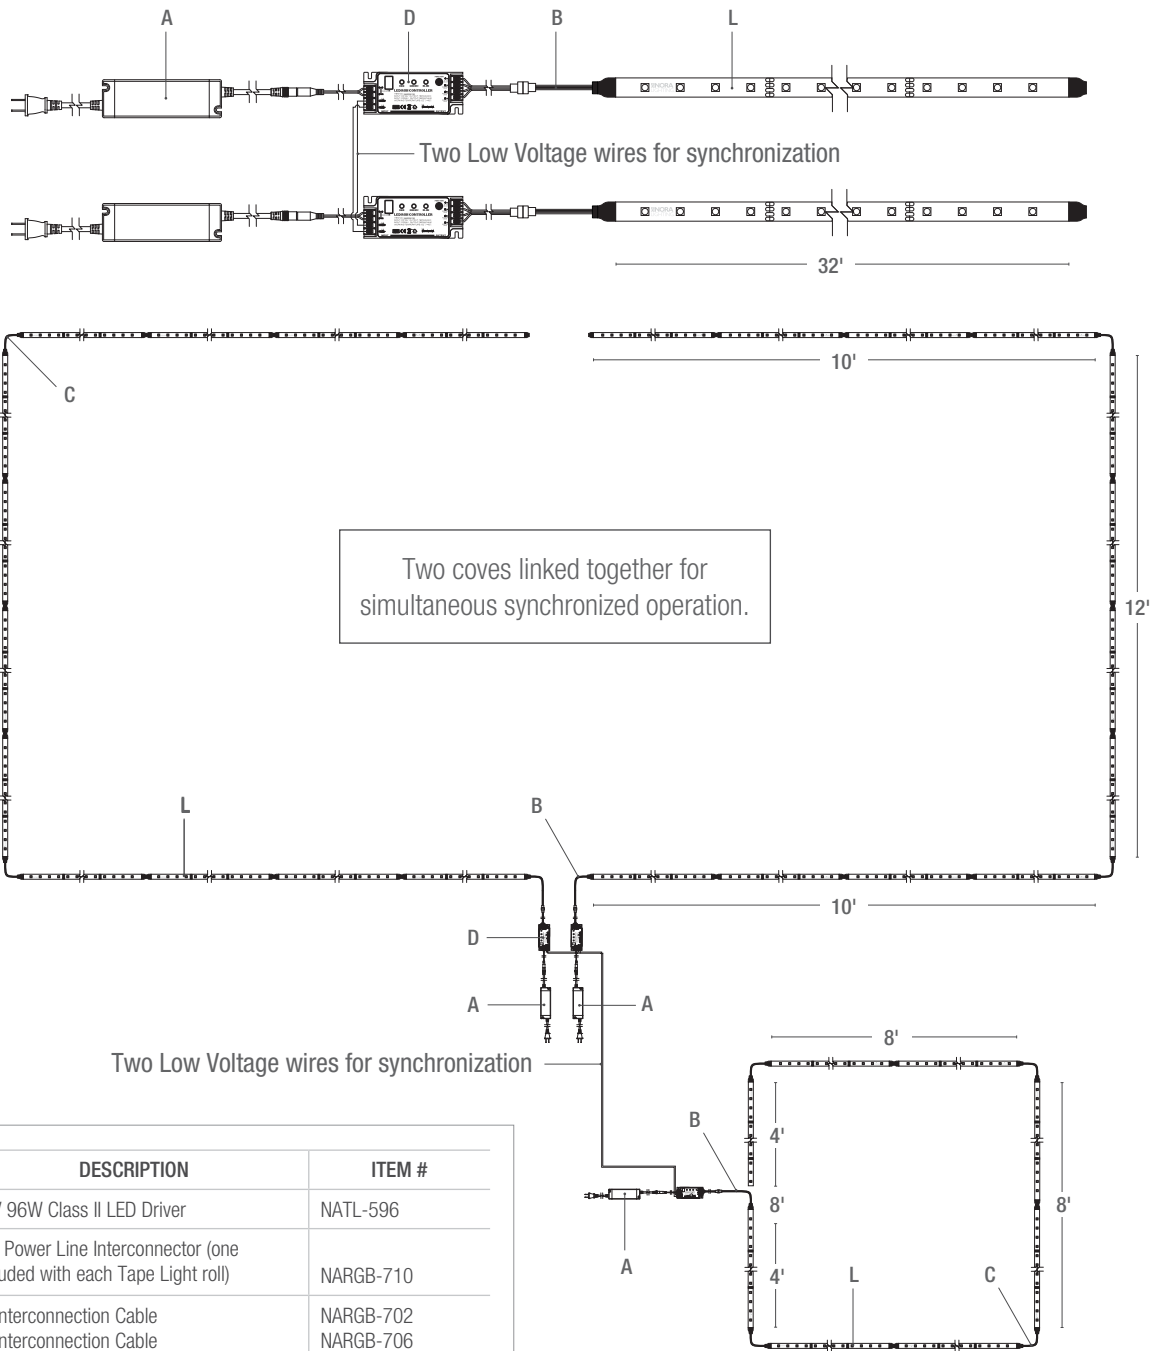

	DESCRIPTION	ITEM #
A	24V 96W Class II LED Driver	NATL-596
B	12" Power Line Interconnector (one included with each Tape Light roll)	NARGB-710
C	2" Interconnection Cable	NARGB-702
	6" Interconnection Cable	NARGB-706
	18" Interconnection Cable	NARGB-718
	36" Interconnection Cable	NARGB-736
	72" Interconnection Cable	NARGB-772
D	RGB Controller	NARGB-760
L	RGB LED Tape Light Roll (Disconnect every 12" or can be cut every 6", contains (16) 12" segments)	NUTP3-16LEDRGB

*\*Important - Consult Spec Sheets at [www.noralighting.com](http://www.noralighting.com) for Limitations on Wet and Damp Location Applications.*

# LED TAPE LIGHT

## CONTINUOUS WHITE TAPE LIGHT ACCESSORIES



Flip-Type Link Connector  
**NATLCFC-600** 12mm



Flip-Type Interconnection Cable

<b>NATLCFC-601</b>	1"
<b>NATLCFC-603</b>	3"
<b>NATLCFC-606</b>	6"
<b>NATLCFC-612</b>	12"
<b>NATLCFC-624</b>	24"
<b>NATLCFC-648</b>	48"
<b>NATLCFC-672</b>	72"

Links two pieces of NUTP51 tape.



Flip-Type Splice Connector

<b>NATLCFC-608/3</b>	3"
<b>NATLCFC-608/12</b>	12"
<b>NATLCFC-608/48</b>	48"
<b>NATLCFC-608/96</b>	96"

Flip connector for NUTP51 to power or joining tape (no DC plug).



Flip-Type DC Plug Connector Cable

<b>NATLCFC-609/3</b>	3"
<b>NATLCFC-609/12</b>	12"
<b>NATLCFC-609/48</b>	48"
<b>NATLCFC-609/96</b>	96"

Flip connector for NUTP51 to power or joining tape with DC plug.



24V Power Line Splitter  
**NATL-302** 5" Cable  
One split into two lines



Power Line Connector

<b>NATL-10</b>	10' Cable
<b>NATL-30</b>	30' Cable

Used with NMT Series Class II LED Driver. Replaces included 10' lead wire, to allow for 30' or less length between run and LED Driver.



Clear Acrylic Mounting Clips  
**NATHR-685** Pack of 15  
Use in conjunction with adhesive backing to attach Tape Light to a surface. Pack of 15 clear acrylic mounting clips are included with every RGB Tape Light roll.



In-Line Touch Dimmer  
**NATL-518**  
72W max., no power fail memory, touch on/off and hold to dim.



Nora SWITCHEX® All-in-One LED Driver and Dimmer  
**NATL-SWEX100/24**  
24V 100W

Converts 120 VAC to low voltage DC in a standard electrical box. Includes face plate.



12V & 24V Class II Hardwire Magnetic Driver Dimmable

<b>NMTD-60/24D</b>	24V 60W
<b>NMTD-96/24D</b>	24V 96W
<b>NTM-303/24C2D1</b>	3x100W

**Voltage:** 12V & 24V DC  
**\*Includes:** (3) 10' Power Line Connectors (30' ordered separately)



Hardwired Class II EI. Driver Non-Dimmable

<b>NATL-530HW</b>	24V 30W
<b>NATL-560HW</b>	24V 60W

**Voltage:** 24V DC  
**Cable Length:** 3-1/4"  
**Input Wire:** 4"  
\*Requires: NUSP-JBox for hardwire or NRA-6035 for plug in application; Power line interconnector cable to connect to Tape Light run.



Direct Plug-In Elect. Driver Non-Dimmable

<b>NATL-524</b>	24V 24W
<b>NATL-545</b>	24V 45W

**Voltage:** 24V DC  
**Cable Length:** 6 Feet  
**Requires:** Power line interconnector cable to connect to Tape Light run.



Class II Electronic LED Driver Non-Dimmable

<b>NATL-596</b>	96W
-----------------	-----

**Voltage:** 24V DC  
**Input Wire:** 5' Cord and Plug  
**Output Wire:** 44" Out Wire



24V Class II Electronic LED Driver Non-Dimmable

<b>NATL-5060HW</b>	60W
<b>NATL-5100HW</b>	100W

**Dimmable (0-10V)**  
**NATL-5096-24HWD10** 96W  
Includes hardwire box and 10' Power Line Connector



In-Wall Rated Wire

<b>NATL-W16-2-250</b>	250
<b>NATL-W16-2-20</b>	20

16AWG low voltage Class II two-conductor, in-wall rated wire.

# SPECIALTY DRIVERS

## LED LIGHTBARS · LED TAPE LIGHT · LED PUCK LIGHTS

12+HMD10



Dimmable Class II Hardwire Magnetic Driver

<b>NMT-244/12C2D1*</b>	12V 4x 60W
<b>NMT-303/24C2D1**</b>	24V 3x 100W

12V DC / 24V DC

Width: 2-1/2" x Length: 6-5/8" x Height: 2-3/8"

**Includes:** 10' power line connector.  
(optional 30' power line connector ordered separately)

**\*Includes:** (4) 10' power line connectors.

**\*\*Includes:** (3) 10' power line connectors.

Dimmable with Magnetic Low Voltage Dimmer



Dimmable Class II Hardwire Magnetic Driver

<b>NMTD-40/12D</b>	12V 40W
<b>NMTD-60/12D</b>	12V 60W
<b>NMTD-60/24D</b>	24V 60W
<b>NMTD-96/24D</b>	24V 96W

12V DC / 24V DC

**Input Voltage:** 120/277V

Width: 3" x Length: 14-1/4" x Height: 2-7/8"

**Includes:** 10' power line connector.  
(optional 30' power line connector ordered separately)

Dimmable with Magnetic Low Volt Dimmer



Class II Hardwire Electronic Driver

<b>NATL-5100HW</b>	Non-Dimmable	24V 100W
<b>NATL-5060HW</b>	Non-Dimmable	24V 60W
<b>NATL-5096-24HWD10</b>	Dimmable 0-10V	24V 96W
<b>NATL-5060-12HWD10</b>	Dimmable 0-10V	12V 60W

100W 24V AC

Width: 3-3/8" x Length: 11-1/4" x Height: 3-1/4"

**Includes:** driver, hardware box and 10' power line connector.



Class II Electronic Driver Hardwire or Cord & Plug (Non-Dimmable)

<b>NAPK-530HW/12</b>	120V/12V 30W
<b>NAPK-560HW/12</b>	120V/12V 60W
<b>NATL-530HW</b>	120V/24V 30W
<b>NATL-560HW</b>	120V/24V 60W

Width: 1-3/4" x Length: 5-5/8" x Height: 1-1/4"

**Power Line Connector:** 3-1/4"

**Input Wire:** 4"

**Requires:** NUSP-JBox for hardwire or NRA-6035 for plug in application; Power line interconnector cable to connect to Tape Light run



Class II Direct Plug-In Driver (Non-Dimmable)

<b>NAPK-524/12</b>	12V 24W
<b>NATL-524</b>	24V 24W
<b>NATL-545</b>	24V 45W

12V or 24V DC

**Input Cord Length:** 4 Feet (NAPK-524/12);  
6 Feet (NATL-524, NATL-545)



Plug-In LED Driver (Non-Dimmable)

<b>NATL-596</b>	24V DC 96W
-----------------	------------

Width: 2-1/4" x Length: 5-1/2" x Height: 1-1/4"

**Power Line Connector:** 44"

**Cord and Plug length:** 55"

Class II Plug-In Driver (Non-Dimmable)

<b>NAPK-550/12</b>	12V DC 50W
--------------------	------------

**Power Cord Length:** 6 Feet

**Input Cord Length:** 5 Feet

*All LED Drivers require Power Line Interconnector to power systems.*