

### FEATURES

#### EXTRA PROTECTION IN HARSH CONDITIONS

Engineered for direct burial or temporary submersion, with trim-to-size wire port plugs and double o-rings on the screw port caps.

**Protected from the Elements**

Temporary submersion up to 6' deep and direct burial applications

**Engineered to Last**


Durable EPDM rubber insulation for abrasion and chemical resistance

**Pre-filled with Oxide Inhibitor**

Corrosion prevention for low-contact resistance connections

**Removable plugs**

Secures entry port closures and ensures debris prevention

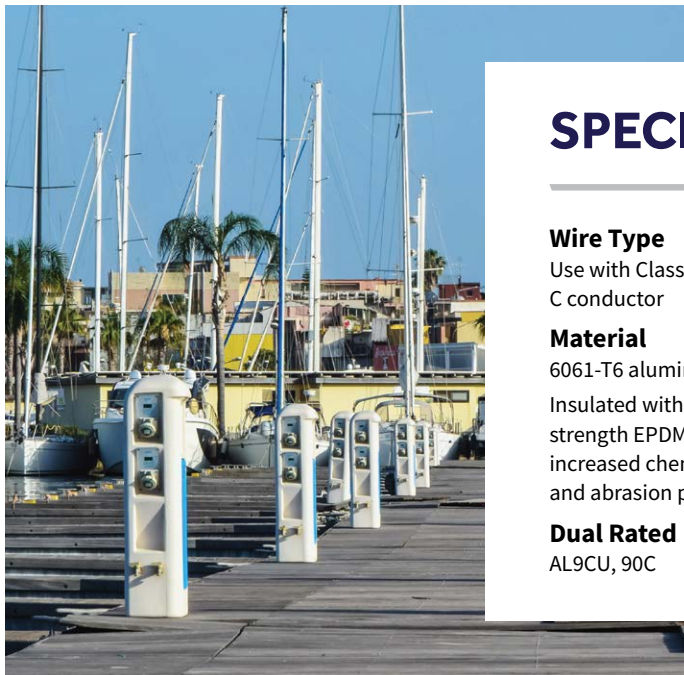

### SPECIFICATIONS

**Wire Type**

Use with Class B and C conductor

**Material**

6061-T6 aluminum alloy  
Insulated with high dielectric strength EPDM rubber for increased chemical and abrasion protection

**Dual Rated**

AL9CU, 90C

**UL and ANSI Standards\***

ISPB2/0 Series and ISPBS350 in-line splice sizes meet or exceeds UL 486D and ANSI C119.1  
ISPB350 and ISPB600 sizes meet ANSI C119.1

**Location**

Temporarily wet, dry and submersible locations

**Environmental**

Sun and salt resistant

WIRE CONNECTOR



\*ISPB2/0 Series and ISPBS350 Series Only

### MULTIPLE CONFIGURATIONS

**SINGLE-SIDE ENTRY**



**OFFSET ENTRY**



**IN-LINE ENTRY**



## SINGLE-SIDE ENTRY

CATALOG NUMBER	WIRE RANGE (Kcmil/AWG)	PORTS	LENGTH (IN.)	WIDTH (IN.)	HEIGHT (IN.)	MAX AMP (ALUM-COPP)	HEX KEY (IN.)
ISPB2/0-2	2/0 - 14	2	1.93	2.66	2.11	150-195	3/16
ISPB2/0-3		3	2.79	2.66	2.11	150-195	3/16
ISPB2/0-4		4	3.65	2.66	2.11	150-195	3/16
ISPB2/0-6		6	5.37	2.66	2.11	150-195	3/16
ISPB350-3	350 - 12	3	3.61	4.14	3.06	280-350	5/16
ISPB350-4		4	4.80	4.14	3.06	514-657	5/16
ISPB350-6		6	7.18	4.14	3.06	770-985	5/16
ISPB600-3	600 - 12	3	4.87	5.43	3.80	385-475	5/16
ISPB600-4		4	6.56	5.43	3.80	810-1035	5/16
ISPB600-6		6	9.94	5.43	3.80	1215-1554	5/16

## OFFSET ENTRY

CATALOG NUMBER	WIRE RANGE (Kcmil/AWG)	PORTS	LENGTH (IN.)	WIDTH (IN.)	HEIGHT (IN.)	MAX AMP (ALUM-COPP)	HEX KEY (IN.)
ISPBO2/0	2/0 - 14	3	2.79	4.18	2.11	150-195	3/16

## IN-LINE ENTRY

CATALOG NUMBER	WIRE RANGE (Kcmil/AWG)	PORTS	LENGTH (IN.)	WIDTH (IN.)	HEIGHT (IN.)	MAX AMP (ALUM-COPP)	HEX KEY (IN.)
ISPBS2/0	2/0 - 14	2	5.05	0.88	2.10	150-195	3/16
ISPBS350	350 - 10	2	8.71	1.69	3.39	280-350	5/16

Scan for full  
installation  
instructions

