




Pass & Seymour

# Straight Blade Receptacles Commercial Grade 15 & 20A, 125V

CR15, CR20

## The standard for commercial receptacles.

**P**lating, corrosion-resistant straps, rugged nylon faces, and triple-wipe power contacts mean these receptacles will ensure consistent performance. Tri-drive, backed-out terminal screws save installation time.

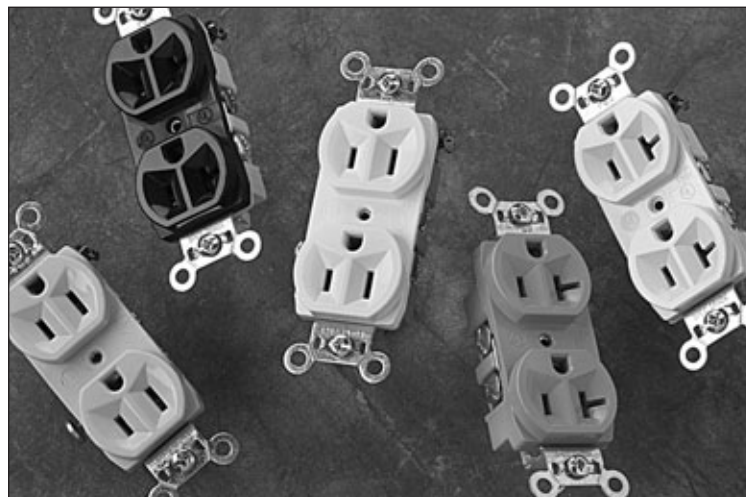

### Features & Benefits

**.032 inch thick, brass, triple-wipe power contacts** for lasting retention.


**Two drive screws anchor strap** to back body and face where abrupt removal torque is strongest.

**Corrosion-resistant, plated steel strap** locked in to face and back body to resist pulling away from face/body assembly.

**Auto-ground** eliminates the necessity to terminate grounding conductor to device.

**Easily accessed break-off, line-contact connecting tab** for fast, easy split-circuit wiring.

**Tri-drive steel terminal screws.** Side wire capability.

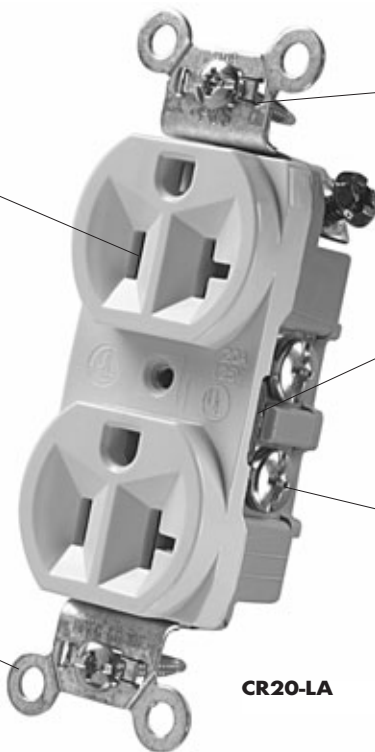

CR20-LA

### Field Uses/Vertical Markets

- Retail
- Office
- Hospitality/Lodging
- Multiple Dwelling



Pass & Seymour

# Straight Blade Receptacles Commercial Grade 15 & 20A, 125V

## Ordering Information

Catalog Number	Rating A. V.	Color	NEMA Config. No.
<b>Duplex Receptacles Side Wire</b>			
CR15-I	15 125	Ivory	5-15R
CR15-W	15 125	White	5-15R
CR15	15 125	Brown	5-15R
CR15-GRY	15 125	Gray	5-15R
CR15-LA	15 125	Light Almond	5-15R
CR20-I	20 125	Ivory	5-20R
CR20-W	20 125	White	5-20R
CR20	20 125	Brown	5-20R
CR20-GRY	20 125	Gray	5-20R
CR20-BK	20 125	Black	5-20R
CR20-LA	20 125	Light Almond	5-20R



NEMA  
5-15R



NEMA  
5-20R

For more information on these and other P&S products refer to our Product Guide or visit our web site.

# Straight Blade Receptacles Commercial Grade 15 & 20A, 125V




Pass & Seymour

## Technical Specifications

3rd Party Compliance
UL Listed, File Number E140596, Standard UL498. CSA Certified, File Number LR16063, Standard CSA-C22.2 No. 42.

Performance	
<b>Electrical</b>	
Dielectric Voltage	Withstands 1500V minimum
Maximum Working Voltage	125V
Maximum Continuous Current	15A – CR15; 20A – CR20
Temperature Rise	Maximum 30°C after 50 cycles at 150% of rated current
<b>Mechanical</b>	
Terminal Accommodation	#14 AWG – #10 AWG
Product Identification	Amperage, Voltage, 3rd Party Compliance.
<b>Environmental</b>	
Flammability	UL94 V2
Operating Temperature	Maximum continuous +50°C, minimum -40°C without impact

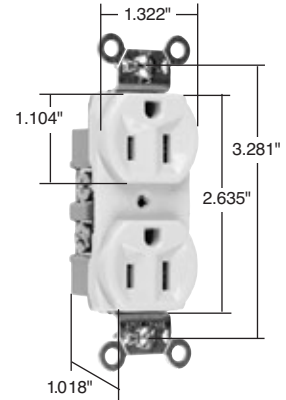


**Dimensions for  
15 & 20 Amp**

Materials			
Face	Nylon	Terminal Screws	#8 Tri-Drive Steel (Neutral = Nickel-Plated Steel)
Back Body	PVC	Ground Screws	#8 Hex Tri-Drive Steel
Line Contacts	.032 260 Brass	Assembly Drive Screw	Zinc-Plated Steel
Mounting Strap	.042 Zinc-Plated Steel	Auto-Ground Clip	Stainless Steel
Ground Contact	.040 260 Brass	Mounting Screws	Tri-Drive Steel


**Warranty**  
1 Year

## Complimentary Devices & Accessories

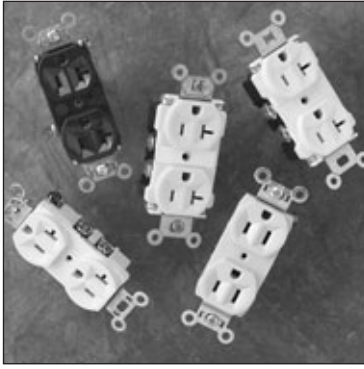

### STRAIGHT BLADE RECEPTACLES

- Extra Heavy-Duty
- Heavy-Duty
- Construction Grade

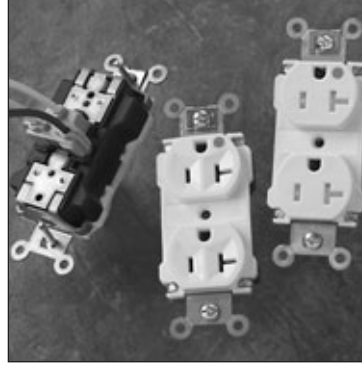


### PLUGTAIL™ DEVICES

- Extra Heavy-Duty Hospital Grade Receptacles
- Heavy-Duty Hospital Grade Receptacles
- Extra Heavy-Duty Receptacles




### DECORATOR DEVICES

- Construction Grade Switches
- Construction Grade Illuminated & Pilot Lighted Switches
- Construction Grade Receptacles
- Commercial Grade Receptacles
- Construction Grade Hallway Lights

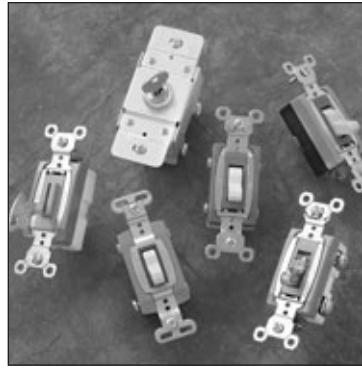

### SWITCHES

- Heavy-Duty Toggle
- Heavy-Duty Lighted Toggle
- Heavy-Duty Security
- Heavy-Duty Locking
- Construction Grade Toggle
- Commercial Grade Toggle

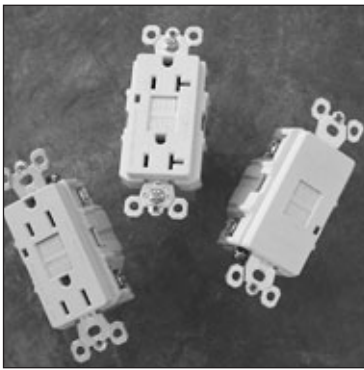

### GFCIs

- Construction Grade with Auto-Ground
- Construction Grade
- Construction Grade Dead Front



### WALL PLATES

- TradeMaster® Thermoplastic Nylon
- Stainless Steel
- Brass
- Aluminum
- Dustproof Stainless Steel Covers

## Also available...

- Light Almond Devices
- Hospital Grade Devices
- TVSS & Isolated Ground Devices
- Ground Continuity Monitoring (GCM)
- Straight Blade Plugs & Connectors
- Turnlok® Locking Devices
- Weatherproof Boxes & Covers
- IEC 309 Industrial Products
- Flexcor® Wire Mesh Grips
- Configurable Solutions



**Legrand/Pass & Seymour**  
P.O. Box 4822  
Syracuse, NY 13221-4822  
800-223-4185

**North America Headquarters**  
60 Woodlawn Street  
West Hartford, CT 06110  
Phone: 1.877.BY.LEGRAND (295.3472)  
Fax: 1.860.232.2062  
www.legrand.us

**Legrand Canada**  
570 Applewood Crescent  
Vaughan, ON, L4K 4B4  
Phone: 905.738.9195  
Fax: 905.738.9721  
www.legrand.ca

SF304R1 — Updated January 2004 — For latest specs visit [www.legrand.us/passandseymour](http://www.legrand.us/passandseymour)