


SWITCHES

Specification Grade Decorator Switches 15 & 20A, 120/277 & 347VAC; 20A, 120VAC

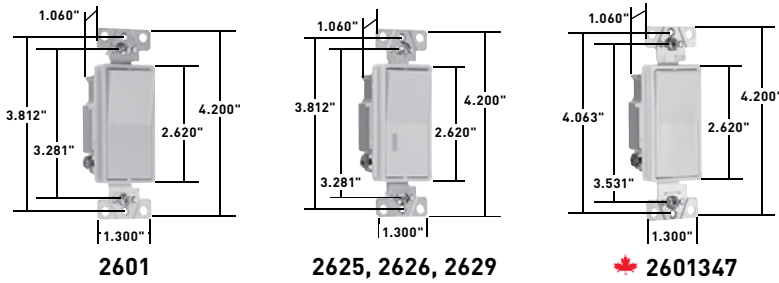

Features

- Impact-resistant polycarbonate back body and frame.
- Cushioned thermoplastic paddle assures smooth, quiet long-term operation.
- Unique single rocking butterfly contact provides long-term consistent performance with significantly fewer moving parts.
- Internal screw-pressure-plate back and side wire capability for easy installation with #14 - #10 AWG stranded or solid copper/copper clad wire. Terminals made of high conductivity brass and serrated for maximum wire gripping.
- Silver alloy contacts integrally formed to the butterfly actuator assures reliable performance.
- Integral auto-ground clip for positive ground to metal boxes.
- Tri-drive ground, terminal and mounting screws. All terminal screws backed out, ready-to-install.

CATALOG NUMBER				RATING			3rd PARTY COMPLIANCE	
SINGLE POLE	DOUBLE POLE	THREE-WAY	FOUR-WAY	A.	VAC	COLOR	UL20	C22.2 111
SPECIFICATION GRADE DECORATOR SWITCHES BACK & SIDE WIRE								
26011		2603I	2604I	15	120/277	Ivory	•	•
2601W		2603W	2604W	15	120/277	White	•	•
2601GRY		2603GRY		15	120/277	Gray	•	•
2601BK		2603BK		15	120/277	Black	•	•
2601LA		2603LA	2604LA	15	120/277	Light Almond	•	•
2621I	2622I	2623I	2624I	20	120/277	Ivory	•	•
2621W	2622W	2623W	2624W	20	120/277	White	•	•
2621	2622	2623	2624	20	120/277	Brown	•	•
2621GRY	2622GRY	2623GRY	2624GRY	20	120/277	Gray	•	•
2621BK	2622BK	2623BK	2624BK	20	120/277	Black	•	•
2621RED		2623RED	2624RED	20	120/277	Red	•	•
2621LA	2622LA	2623LA	2624LA	20	120/277	Light Almond	•	•
ILLUMINATED DECORATOR SWITCHES (LIGHTED WHEN OFF) BACK & SIDE WIRE								
2625I		2626I	2628I	20	120	Ivory	•	•
2625W		2626W	2628W	20	120	White	•	•
2625				20	120	Brown	•	•
2625RED				20	120	Red	•	•
2625LA		2626LA	2628LA	20	120	Light Almond	•	•
PILOT LIGHTED DECORATOR SWITCHES (LIGHTED WHEN ON) BACK & SIDE WIRE								
2629I				20	120	Ivory	•	•
2629W				20	120	White	•	•
2629LA				20	120	Light Almond	•	•

For Bulk Packaging Solutions consult factory.

CATALOG NUMBER			RATING		3rd PARTY COMPLIANCE		
SINGLE POLE	THREE-WAY	FOUR-WAY	A.	VAC	COLOR	UL20	C22.2 111
SPECIFICATION GRADE DECORATOR SWITCHES BACK & SIDE WIRE							
2601347I	2603347I		15	347	Ivory	•	•
2601347W	2603347W		15	347	White	•	•
2601347GRY			15	347	Gray	•	•
2601347LA			15	347	Light Almond	•	•
2621347I	2623347I	2624347I	20	347	Ivory	•	•
2621347W	2623347W	2624347W	20	347	White	•	•
2621347GRY	2623347GRY		20	347	Gray	•	•
2621347BK	2623347BK		20	347	Black	•	•
2621347RED	2623347RED		20	347	Red	•	•
2621347LA	2623347LA	2624347LA	20	347	Light Almond	•	•

Denotes Canadian catalog number. All Canadian products have Combination Slotted/Robertson Head Brass Screws.

All devices listed on this page conform to NEMA WD-1 and WD-6.

DEVICES & WALL PLATES

Color Selection Chart

Devices & Plastic Wall Plate Colors



Ivory Light Almond White Green Antique Brass Dark Bronze Nickel



Black Blue Brown Gray Orange Red

See specific device and wall plate catalog charts for particular color availabilities.

Metal Wall Plates

Metal Finish




Aluminum Brass (Brushed) Polished Brass Stainless Steel Brushed Bronze Chrome

Custom Metal Wall Plates Paint Finish Colors

Paint Color



Orange Green Gray Yellow Glossy Black Brown White

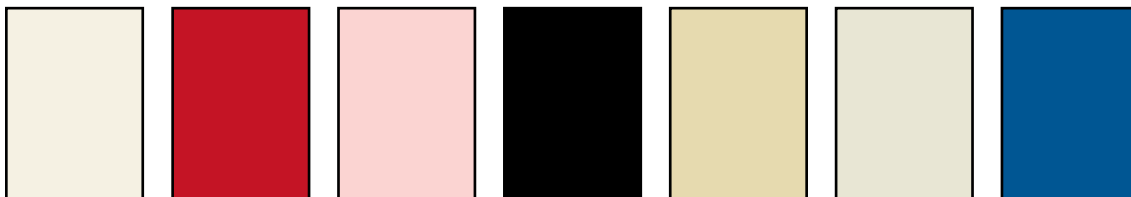

Primer Red Pink Flat Black Ivory Light Almond Blue

To order custom metal wall plates, see Pages P-41 – P-45.

For additional colors consult factory.

All devices listed on this page conform to NEMA WD-1 and WD-6.

TECHNICAL SPECIFICATIONS

Specification Grade Decorator Switches 15 & 20A, 120/277VAC; 20A, 120VAC

Typical Specifications

Manufacturer's Identification: Pass & Seymour® 2601

Description: Specification Grade Decorator Switch, Back & Side Wire



Rating: 15A, 120/277VAC

3rd Party Compliance: UL Listed, File Number E140597, Standard UL20, General Use Snap Switches,

CSA Certified, File Number LR17446, Standard CSA-C22.2 No. 111, General Use Snap Switches.

Conforms to NEMA WD-1 and WD-6.

CATALOG NUMBER	COLOR	DESCRIPTION/RATING	CATALOG NUMBER	COLOR	DESCRIPTION/RATING
<input type="checkbox"/> 2601I	Ivory	15A 120/277VAC, Single Pole	<input type="checkbox"/> 2623RED	Red	20A 120/277VAC, 3-Way
<input type="checkbox"/> 2601W	White	15A 120/277VAC, Single Pole	<input type="checkbox"/> 2623LA	Lt. Almond	20A 120/277VAC, 3-Way
<input type="checkbox"/> 2601GRY	Gray	15A 120/277VAC, Single Pole	<input type="checkbox"/> 2604I	Ivory	15A 120/277VAC, 4-Way
<input type="checkbox"/> 2601BK	Black	15A 120/277VAC, Single Pole	<input type="checkbox"/> 2604W	White	15A 120/277VAC, 4-Way
<input type="checkbox"/> 2601LA	Lt. Almond	15A 120/277VAC, Single Pole	<input type="checkbox"/> 2604LA	Lt. AL.	15A 120/277VAC, 4-Way
<input type="checkbox"/> 2621I	Ivory	20A 120/277VAC, Single Pole	<input type="checkbox"/> 2624I	Ivory	20A 120/277VAC, 4-Way
<input type="checkbox"/> 2621W	White	20A 120/277VAC, Single Pole	<input type="checkbox"/> 2624W	White	20A 120/277VAC, 4-Way
<input type="checkbox"/> 2621	Brown	20A 120/277VAC, Single Pole	<input type="checkbox"/> 2624	Brown	20A 120/277VAC, 4-Way
<input type="checkbox"/> 2621GRY	Gray	20A 120/277VAC, Single Pole	<input type="checkbox"/> 2624GRY	Gray	20A 120/277VAC, 4-Way
<input type="checkbox"/> 2621BK	Black	20A 120/277VAC, Single Pole	<input type="checkbox"/> 2624BK	Black	20A 120/277VAC, 4-Way
<input type="checkbox"/> 2621RED	Red	20A 120/277VAC, Single Pole	<input type="checkbox"/> 2624RED	Red	20A 120/277VAC, 4-Way
<input type="checkbox"/> 2621LA	Lt. Almond	20A 120/277VAC, Single Pole	<input type="checkbox"/> 2624LA	Lt. Almond	20A 120/277VAC, 4-Way
<input type="checkbox"/> 2622I	Ivory	20A 120/277VAC, Double Pole	ILLUMINATED*		
<input type="checkbox"/> 2622W	White	20A 120/277VAC, Double Pole	<input type="checkbox"/> 2625I	Ivory	20A 120VAC, Single Pole
<input type="checkbox"/> 2622	Brown	20A 120/277VAC, Double Pole	<input type="checkbox"/> 2625W	White	20A 120VAC, Single Pole
<input type="checkbox"/> 2622GRY	Gray	20A 120/277VAC, Double Pole	<input type="checkbox"/> 2625	Brown	20A 120VAC, Single Pole
<input type="checkbox"/> 2622BK	Black	20A 120/277VAC, Double Pole	<input type="checkbox"/> 2625LA	Lt. Almond	20A 120VAC, Single Pole
<input type="checkbox"/> 2622LA	Lt. Almond	20A 120/277VAC, Double Pole	<input type="checkbox"/> 2626I	Ivory	20A 120VAC, 3-Way
<input type="checkbox"/> 2603I	Ivory	15A 120/277VAC, 3-Way	<input type="checkbox"/> 2626W	White	20A 120VAC, 3-Way
<input type="checkbox"/> 2603W	White	15A 120/277VAC, 3-Way	<input type="checkbox"/> 2626LA	Lt. Almond	20A 120VAC, 3-Way
<input type="checkbox"/> 2603GRY	Gray	15A 120/277VAC, 3-Way	<input type="checkbox"/> 2628I	Ivory	20A 120VAC, 4-Way
<input type="checkbox"/> 2603BK	Black	15A 120/277VAC, 3-Way	<input type="checkbox"/> 2628W	White	20A 120VAC, 4-Way
<input type="checkbox"/> 2603LA	Lt. Almond	15A 120/277VAC, 3-Way	<input type="checkbox"/> 2628LA	Lt. Almond	20A 120VAC, 4-Way
<input type="checkbox"/> 2623I	Ivory	20A 120/277VAC, 3-Way	PILOT LIGHTED		
<input type="checkbox"/> 2623W	White	20A 120/277VAC, 3-Way	<input type="checkbox"/> 2629I	Ivory	20A 120VAC, Single Pole
<input type="checkbox"/> 2623	Brown	20A 120/277VAC, 3-Way	<input type="checkbox"/> 2629W	White	20A 120VAC, Single Pole
<input type="checkbox"/> 2623GRY	Gray	20A 120/277VAC, 3-Way	<input type="checkbox"/> 2629LA	Lt. Almond	20A 120VAC, Single Pole
<input type="checkbox"/> 2623BK	Black	20A 120/277VAC, 3-Way			



Performance

Electrical

Dielectric Withstand Voltage: 1500V Minimum

Maximum Working Voltage: 277VAC

Overload: Minimum 4.8 times rated current for 100 cycles

Temperature Rise: 30°C maximum at rated current

Maximum Continuous Current: 277VAC

Endurance: 50,000 cycles minimum, resistive, inductive, tungsten filament lamp load

Mechanical

Terminal Accommodation: #14 AWG – #10 AWG

Environmental

Flammability: UL94 V2

Operating Temperature: Maximum continuous +115°C, minimum -40°C

Materials

Back Body: Polycarbonate

Frame: Polycarbonate

Paddle: Thermoplastic

Terminals: Brass

Terminal Screws: Tri-Drive Brass-Plated Steel

Strap: Steel

Pressure Plate: Steel

Contacts: Silver Cadmium Oxide

Spring Arm: Brass

Bumper: Rubber

Spring: Zinc-Plated Steel

Ground Terminal: Brass

Ground Screw: Tri-Drive Zinc-Plated Steel

Illuminating Lamp*: Neon

Lens*: Polycarbonate

*For Illuminated versions. May not be compatible with some fluorescent lighting loads.

Project
Location/Type