


STRAIGHT BLADE RECEPTACLES

Specification Grade Single Receptacles 15 & 20A, 125 & 250V

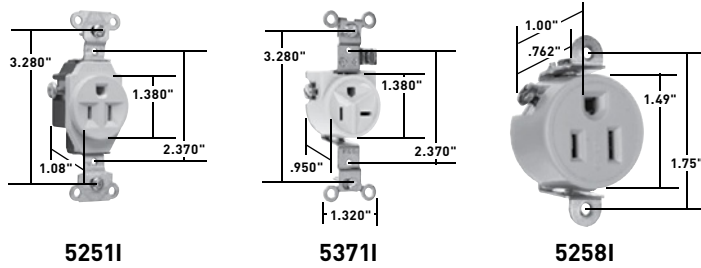


Features

- Auto-ground clip assures positive ground.
- Two drive screws anchor strap to back body and face where abrupt removal torque is greatest.
- Heavy-duty, corrosion-resistant zinc-plated steel strap for added strength.
- One-piece brass triple-wipe power contacts for lasting retention.

CATALOG NUMBER	RATING		COLOR	NEMA CONFIG. NO.	3rd PARTY COMPLIANCE	
	A.	V.			UL498	C22.2 No. 42
SINGLE RECEPTACLES SIDE WIRE						
5251I	15	125	Ivory	5-15R	•	•
5251W	15	125	White	5-15R	•	•
5251	15	125	Brown	5-15R	•	•
5251LA	15	125	Light Almond	5-15R	•	•
5351I	20	125	Ivory	5-20R	•	•
5351W	20	125	White	5-20R	•	•
5351	20	125	Brown	5-20R	•	•
5351LA	20	125	Light Almond	5-20R	•	•
5651I	15	250	Ivory	6-15R	•	•
5651W	15	250	White	6-15R	•	•
5651	15	250	Brown	6-15R	•	•
5651LA	15	250	Light Almond	6-15R	•	•
5851I	20	250	Ivory	6-20R	•	•
5851W	20	250	White	6-20R	•	•
5851	20	250	Brown	6-20R	•	•
5851LA	20	250	Light Almond	6-20R	•	•
SHORT STRAP SINGLE RECEPTACLES SCREW SPACING 2.370"						
5251SSIB	15	125	Ivory	5-15R	•	•
5251SSWB	15	125	White	5-15R	•	•
5251SSBKB	15	125	Black	5-15R	•	•
5251SSLAB	15	125	Light Almond	5-15R	•	•
SINGLE RECEPTACLES SIDE WIRE RIGHT ANGLE SLOTS						
5371I	20	125	Ivory	Non-NEMA	•	•
5371W	20	125	White	Non-NEMA	•	•
5371	20	125	Brown	Non-NEMA	•	•
SHORT STRAP SINGLE RECEPTACLES SCREW SPACING 1.750"						
5258I	15	125	Ivory	5-15R	•	•
5258W	15	125	White	5-15R	•	•
5258	15	125	Brown	5-15R	•	•
5258BK	15	125	Black	5-15R	•	•
5358I	20	125	Ivory	5-20R	•	•
5358W	20	125	White	5-20R	•	•
5358	20	125	Brown	5-20R	•	•
5358BK	20	125	Black	5-20R	•	•
5658I	15	250	Ivory	6-15R	•	•
5658	15	250	Brown	6-15R	•	•
5858I	20	250	Ivory	6-20R	•	•
5858W	20	250	White	6-20R	•	•
5858	20	250	Brown	6-20R	•	•


Supplied with mounting screws.

2 Pole, 3 Wire



NEMA 5-15R

NEMA 5-20R



NEMA 6-15R

NEMA 6-20R

For Bulk Packaging Solutions consult factory.