


STRAIGHT BLADE RECEPTACLES

TradeMaster® Receptacles 15A, 125V

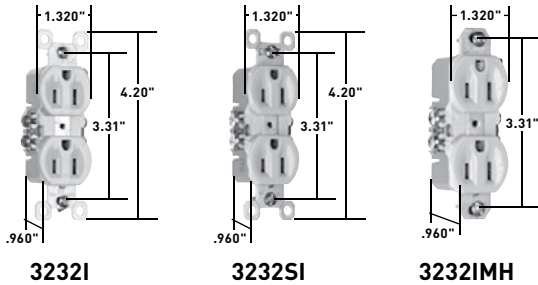

Features

- High-impact resistant thermoplastic construction.
- Extra-long strap.
- Quickloop wire looping aid.
- Long-term blade retention.
- Longer tri-drive screws for easier #12 AWG looping.
- Extra-large circuit break-off tabs.
- Side-access push wire release.
- Ultrasonic welding of face to back body.
- Side wire accepts #12 – #14 AWG solid wire.
- Push wire accepts #14 AWG solid only.
- Low profile face.
- Traditional contoured face (3232 models).
- Self-grounding models provide automatic ground clip.

CATALOG NUMBER	RATING		COLOR	NEMA CONFIG. NO.	3rd PARTY COMPLIANCE		
	A.	V.			UL498	C22.2 No. 42	cULus
DUPLEX RECEPTACLES – GROUNDING							
3232I*	15	125	Ivory	5-15R	•	•	
3232W*	15	125	White	5-15R	•	•	
3232*	15	125	Brown	5-15R	•	•	
3232BK	15	125	Black	5-15R	•	•	
3232LA*	15	125	Light Almond	5-15R	•	•	
SELF-GROUNDING DUPLEX RECEPTACLES							
3232SI	15	125	Ivory	5-15R	•	•	
3232SW	15	125	White	5-15R	•	•	
3232S	15	125	Brown	5-15R	•	•	
3232SLA	15	125	Light Almond	5-15R	•	•	
4 TERMINAL, SCREWS IN							
3232I4	15	125	Ivory	5-15R	•	•	
3232W4	15	125	White	5-15R	•	•	
32324	15	125	Brown	5-15R	•	•	
DUPLEX RECEPTACLES – WITHOUT EARS							
3232IMH	15	125	Ivory	5-15R	•	•	
3232WMH	15	125	White	5-15R	•	•	
3232MH	15	125	Brown	5-15R	•	•	

*Available in bulk packs of 150. Add "U" to end of Catalog Number. Example: 3232LAU.

2 Pole, 3 Wire



NEMA
5-15R