


STRAIGHT BLADE RECEPTACLES

Tamper-Resistant GFCI Receptacles 2 Pole, 3 Wire Grounding 15 & 20A, 125VAC

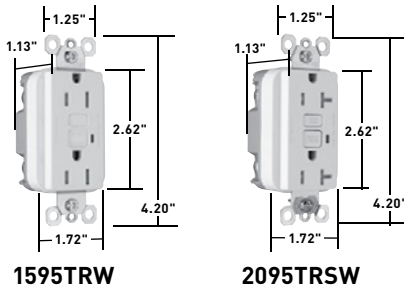


Features

- Protects children: patented shutter system helps prevent improper insertion of foreign objects.
- Meets National Electrical Code® Tamper-Resistant requirements.
- SafeLock™ Protection: if critical components are damaged and ground fault protection is lost, power to receptacle is disconnected.
- Feed-thru wiring configuration allows GFCI to protect downstream receptacles.
- Prevents line-load reversal miswire: no power to the face or downstream receptacles if wired incorrectly.
- Exceeds UL943 voltage surge requirements; survives 100x the required UL 3kA/6kV voltage surge test cycles.
- FSUL Listed (Federal Specification WC596).
- Trip indicator light (red LED).
- Side or internal screw-pressure-plate back wire with #10 - #14 AWG solid or stranded copper wire.
- Two back wire holes per terminal.
- Ground screw has a back wire clamp for easy installation.
- 10 kA short circuit rating.
- Mounting screws are shipped captive in the device and wall plate for easier installation.
- High-impact-resistant thermoplastic construction.
- Extra-long strap.
- Button colors match the device face.
- Dual-direction test and reset buttons.
- Class A rated GFCI.
- Supplied with matching TP26 nylon wall plate (except NI, AB, and DB models).
- Tri-drive screws.

Specifications

- Supply Voltage: 125VAC, 60 Hz
- Supply Voltage Range: 102-132 VAC
- Trip Threshold: 5± 1mA
- Trip Time: 0.025 sec., nominal per UL Standard
- 20 Amp feed-thru capacity

CATALOG NUMBER	RATING		COLOR	NEMA CONFIG. NO.	3rd PARTY COMPLIANCE		
	A.	VAC			UL [®] 498 C22.2 No. 144	cUL ^{us} cULus C22.2 No. 42	FSUL WC596
TRADEMASTER®/SPEC GRADE TAMPER-RESISTANT 15 AMP DUPLEX GFCI							
1595TRI	15	125	Ivory	5-15R	•	•	•
1595TRW	15	125	White	5-15R	•	•	•
1595TR	15	125	Brown	5-15R	•	•	•
1595TRBK	15	125	Black	5-15R	•	•	•
1595TRLA	15	125	Light Almond	5-15R	•	•	•
1595TRNICC4	15	125	Nickel	5-15R	•	•	•
1595TRABCC4	15	125	Antique Brass	5-15R	•	•	•
1595TRDBCC4	15	125	Dark Bronze	5-15R	•	•	•
TRADEMASTER®/SPEC GRADE TAMPER-RESISTANT 15 AMP DUPLEX GFCI WITH AUTO-GROUND							
1595TRSI	15	125	Ivory	5-15R	•	•	•
1595TRSW	15	125	White	5-15R	•	•	•
1595TRSLA	15	125	Light Almond	5-15R	•	•	•
SPECIFICATION GRADE TAMPER-RESISTANT 20 AMP DUPLEX GFCI							
2095TRI	20	125	Ivory	5-20R	•	•	•
2095TRW	20	125	White	5-20R	•	•	•
2095TR	20	125	Brown	5-20R	•	•	•
2095TRGRY	20	125	Gray	5-20R	•	•	•
2095TRBK	20	125	Black	5-20R	•	•	•
2095TRRED	20	125	Red	5-20R	•	•	•
2095TRLA	20	125	Light Almond	5-20R	•	•	•
SPECIFICATION GRADE TAMPER-RESISTANT 20 AMP DUPLEX GFCI WITH AUTO-GROUND							
2095TRSI	20	125	Ivory	5-20R	•	•	•
2095TRSW	20	125	White	5-20R	•	•	•
2095TRSLA	20	125	Light Almond	5-20R	•	•	•



National Electrical Code® Section 406.12 Tamper-Resistant Receptacles in Dwelling Units.

In all areas specified in 210.52 all 125-volt, 15- and 20-amp receptacles shall be listed tamper-resistant receptacles.

GFCIs

TradeMaster® & Specification Grade GFCI Receptacles

1595TRLA

TradeMaster/Spec. Grade GFCI Receptacles

GFCIs with patented SafeLock™ Protection


If critical components are damaged and ground fault protection is lost, power to receptacle is disconnected.

- A. High-impact-resistant, thermoplastic construction** for superior strength and durability.
- B. Captive screws** make for easier installation.
- C. Extra-long strap for better sheet rock contact** eliminates “floaters” yet takes standard wall plate.
- D. Back wire clamp** allows for fast installation of ground wires.
- E. Trip indicator light (LED)** makes it easy to identify tripped condition.
- F. Two back wire holes per termination** add wiring flexibility, eliminate pigtail, and save box space.
- G. Side or internal screw-pressure-plate back wire termination** takes #10–#14 AWG stranded or solid, copper or copper-clad conductors.


The most durable GFCI available. Exceeds UL943 voltage surge requirements; survives 100x the required UL 3kA/6kV voltage surge test cycles.

FSUL Listed (Federal Specification WC596).

Prevents line-load reversal miswire: No power to the face or downstream receptacles if wired incorrectly.

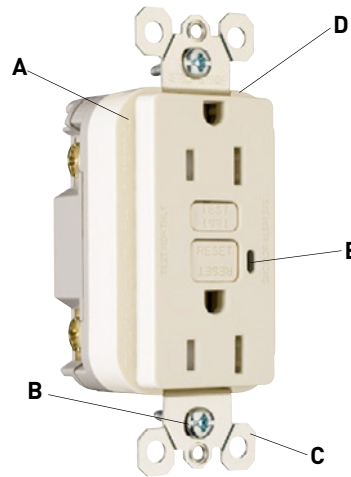


1595TRLA

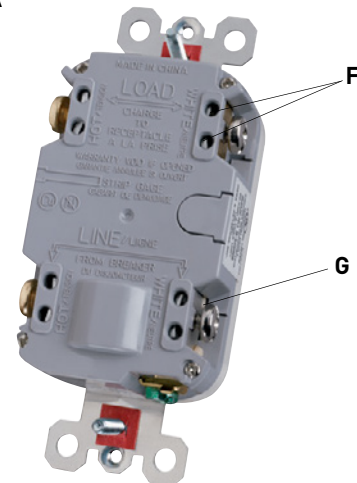

GFCIs

Tamper-Resistant GFCI Receptacles 2 Pole, 3 Wire Grounding 15 & 20A, 125VAC

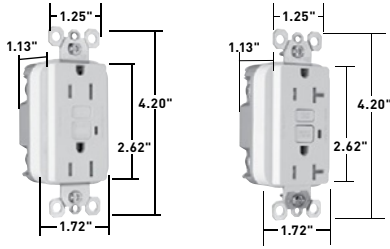

1595TRW

2095TRSW


Features

- Protects children: patented shutter system helps prevent improper insertion of foreign objects.
- Meets National Electrical Code® Tamper-Resistant requirements.
- SafeLock™ Protection: if critical components are damaged and ground fault protection is lost, power to receptacle is disconnected.
- Feed-thru wiring configuration allows GFCI to protect downstream receptacles.
- Prevents line-load reversal miswire: no power to the face or downstream receptacles if wired incorrectly.
- Exceeds UL943 voltage surge requirements; survives 100x the required UL 3kA/6kV voltage surge test cycles.
- FSUL Listed (Federal Specification WC596).
- Trip indicator light (red LED).
- Side or internal screw-pressure-plate back wire with #10 – #14 AWG solid or stranded copper wire.
- Two back wire holes per terminal.
- Ground screw has a back wire clamp for easy installation.
- 10kA short circuit rating.
- Mounting screws are shipped captive in the device and wall plate for easier installation.
- High-impact-resistant thermoplastic construction.
- Extra-long strap.
- Button colors match the device face.
- Dual-direction test and reset buttons.
- Supplied with matching TP26 nylon wall plate (except NI, AB, and DB models).
- Tri-drive screws.

Specifications

- Supply Voltage: 125VAC, 60 Hz
- Supply Voltage Range: 102-132 VAC
- Trio Threshold: 5±1mA
- Trip Time: 0.025 sec., nominal per UL Standard
- 20 Amp feed-thru capacity

CATALOG NUMBER	RATING		COLOR	NEMA CONFIG. NO.	3rd PARTY COMPLIANCE		
	A.	VAC			UL943 C22.2 No. 144	UL498 C22.2 No. 42	FSUL WC596
TRADEMASTER®/SPEC GRADE TAMPER-RESISTANT 15 AMP DUPLEX GFCI							
1595TRI	15	125	Ivory	5-15R	•	•	•
1595TRW	15	125	White	5-15R	•	•	•
1595TR	15	125	Brown	5-15R	•	•	•
1595TRBK	15	125	Black	5-15R	•	•	•
1595TRLA	15	125	Light Almond	5-15R	•	•	•
1595TRNICC4	15	125	Nickel	5-15R	•	•	•
1595TRABCC4	15	125	Antique Brass	5-15R	•	•	•
1595TRDBCC4	15	125	Dark Bronze	5-15R	•	•	•
TRADEMASTER®/SPEC GRADE TAMPER-RESISTANT 15 AMP DUPLEX GFCI WITH AUTO-GROUND							
1595TRSI	15	125	Ivory	5-15R	•	•	•
1595TRSW	15	125	White	5-15R	•	•	•
1595TRSLA	15	125	Light Almond	5-15R	•	•	•
SPECIFICATION GRADE TAMPER-RESISTANT 20 AMP DUPLEX GFCI							
2095TRI	20	125	Ivory	5-20R	•	•	•
2095TRW	20	125	White	5-20R	•	•	•
2095TR	20	125	Brown	5-20R	•	•	•
2095TRGRY	20	125	Gray	5-20R	•	•	•
2095TRBK	20	125	Black	5-20R	•	•	•
2095TRRED	20	125	Red	5-20R	•	•	•
2095TRLA	20	125	Light Almond	5-20R	•	•	•
SPECIFICATION GRADE TAMPER-RESISTANT 20 AMP DUPLEX GFCI							
2095TRSI	20	125	Ivory	5-20R	•	•	•
2095TRSW	20	125	White	5-20R	•	•	•
2095TRSLA	20	125	Light Almond	5-20R	•	•	•



National Electrical Code® Section 406.12 Tamper-Resistant Receptacles in Dwelling Units.

In all areas specified in 210.52 all 125-volt, 15- and 20-amp receptacles shall be listed tamper-resistant receptacles.

All devices listed on this page conform to NEMA WD-1 and WD-6.


TECHNICAL SPECIFICATIONS

Tamper-Resistant GFCI Receptacles 2 Pole, 3 Wire Grounding 15 & 20A, 125VAC


Typical Specifications

Manufacturer's Identification: Pass & Seymour® 1595TR
 Description: Straight Blade Duplex Tamper-Resistant GFCI Receptacle
 Type: 2 Pole, 3 Wire Grounding
 Rating: 20A, 125VAC Feed Thru; 15 or 20A, 125VAC Face
 3rd Party Compliance: cULus Listed, File Number E42190; Standard UL498 Tamper-Resistant, Attachment Plugs and Receptacles UL943 GFCIs. Federal Specification WC596. Standard CSA-C22.2 No. 42, General Use Receptacles, CSA-C22.2 No. 144 GFCIs. Conforms to NEMA WD-1 and WD-6.

CATALOG NUMBER	COLOR	RATING	NEMA CONFIG. NO.
<input type="checkbox"/> 1595TRI	Ivory	15A 125VAC	5-15R
<input type="checkbox"/> 1595TRW	White	15A 125VAC	5-15R
<input type="checkbox"/> 1595TR	Brown	15A 125VAC	5-15R
<input type="checkbox"/> 1595TRBK	Black	15A 125VAC	5-15R
<input type="checkbox"/> 1595TRLA	Light Almond	15A 125VAC	5-15R
<input type="checkbox"/> 1595TRBNCC4	Brushed Nickel	15A 125VAC	5-15R
<input type="checkbox"/> 1595TRTI	Titanium	15A 125VAC	5-15R
<input type="checkbox"/> 1595TRSI*	Ivory	15A 125VAC	5-15R
<input type="checkbox"/> 1595TRSW*	White	15A 125VAC	5-15R
<input type="checkbox"/> 1595TRSLA*	Light Almond	15A 125VAC	5-15R
<input type="checkbox"/> 2095TRI	Ivory	20A 125VAC	5-20R
<input type="checkbox"/> 2095TRW	White	20A 125VAC	5-20R
<input type="checkbox"/> 2095TR	Brown	20A 125VAC	5-20R
<input type="checkbox"/> 2095TRGRY	Gray	20A 125VAC	5-20R
<input type="checkbox"/> 2095TRBK	Black	20A 125VAC	5-20R
<input type="checkbox"/> 2095TRRED	Red	20A 125VAC	5-20R
<input type="checkbox"/> 2095TRLA	Light Almond	20A 125VAC	5-20R
<input type="checkbox"/> 2095TRSI*	Ivory	20A 125VAC	5-20R
<input type="checkbox"/> 2095TRSW*	White	20A 125VAC	5-20R
<input type="checkbox"/> 2095TRSLA*	Light Almond	20A 125VAC	5-20R



Dimensions for 15 & 20 Amp



Dimensions for 15 & 20 Amp With Auto-Ground

Performance

Electrical

Dielectric: Withstands 1500V minimum
 Trip Level: 4 to 6 mA
 Trip Time: .025 Second Nominal
 Frequency: 60 Hz
 Voltage: 125VAC
 Voltage Range: 102-132VAC

Mechanical

Indicator Light (LED): Red, ON when GFCI is tripped
 Terminal Identification: Terminals identified in accordance with UL498 (Hot, White, Green)
 Terminal Accommodation: #14 - #10 AWG solid or stranded copper conductor only
 Product Identification: Ratings are a permanent part of device


Environmental

Operating Temperature: -35°C to +66°C
 Maximum Humidity: 95%
 Flammability: UL94 V2

Materials

Face:	Nylon	Hex Head Grounding Screw:	Steel (Green)
Body:	Nylon	Flat Head Mounting Screws:	Zinc-Plated Steel
Contacts:	.03" Brass (.8)	Test/Reset Buttons:	Nylon
Mounting Straps:	.05" Zinc-Plated Steel (1.3)	Tamper-Resistant Shutter:	Thermoplastic
Terminal Screws:	Steel #8 - 32	Auto-Ground Clip*:	Brass Alloy C260

*Tamper-Resistant GFCIs with Auto-Ground feature.



Project
Location/Type