


STRAIGHT BLADE PLUGS & CONNECTORS

IP20
Suitability

Flanged Inlets & Outlets 2 Pole, 3 Wire Grounding 15 & 20A, 125 & 250V

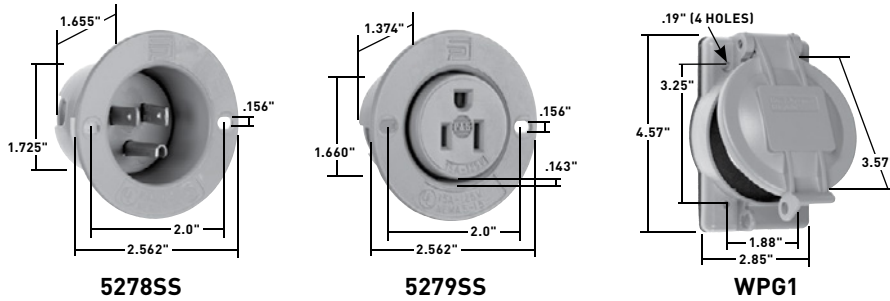


Features

- All thermoplastic construction, provides excellent impact and chemical resistance.
- Available in Gray or Black.
- NEMA configuration molded on flange, easy field identification.

CATALOG NUMBER	RATING		DESCRIPTION	NEMA CONFIG. NO.	3rd PARTY COMPLIANCE	
	A.	V.			UL498	FSUL WC596
FLANGED INLETS & OUTLETS – GRAY						
5278SS	15	125	Inlet, Gray	5-15P	•	•
5279SS	15	125	Outlet, Gray	5-15R	•	•
5378SS	20	125	Inlet, Gray	5-20P	•	•
5379SS	20	125	Outlet, Gray	5-20R	•	•
5678SS	15	250	Inlet, Gray	6-15P	•	•
5679SS	15	250	Outlet, Gray	6-15R	•	•
5478SS	20	250	Inlet, Gray	6-20P	•	•
5479SS	20	250	Outlet, Gray	6-20R	•	•

CATALOG NUMBER	RATING		DESCRIPTION	NEMA CONFIG. NO.	3rd PARTY COMPLIANCE	
	A.	V.			UL498	FSUL WC596
FLANGED INLETS & OUTLETS – BLACK						
5278SSBK	15	125	Inlet, Black	5-15P	•	•
5279SSBK	15	125	Outlet, Black	5-15R	•	•

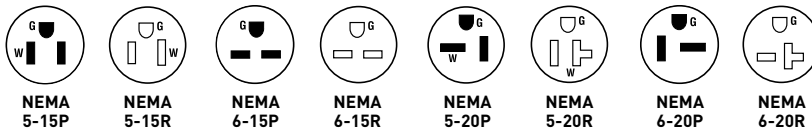

Features

- Glass-filled polycarbonate, impact- and corrosion-resistant.
- Stainless steel hardware.
- Molded-in flat surface label area.
- OSHA lock-out/tag-out provision molded-in.
- Accepts competitor inlets and outlets.

CATALOG NUMBER	DESCRIPTION
WEATHERPROOF COVER FOR FLANGED DEVICES	
WPG1	Weatherproof Cover for Flanged Inlets and Outlets

For further information consult the Weatherproof Section O.