



# INDUSTRIAL SPEC GRADE TURNLOK® LOCKING DEVICES


20 Amp NEMA L1020, L1120 & L1220 3 Pole, 3 Wire Non-Grounding, 20A, 125/250V; 3ø, 250 & 480V




20A Receptacle



20A Connector






20A Plug

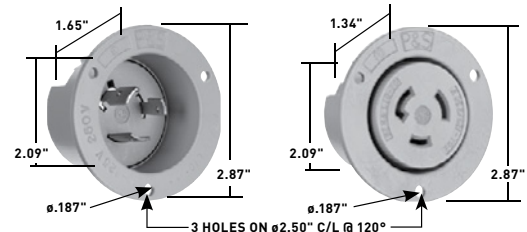


20A Flanged Inlet & Outlet

CATALOG NUMBER	RATING		DESCRIPTION/COLOR	CORD DIAMETER	NEMA CONFIG. NO.	3rd PARTY COMPLIANCE		
	A.	V.				UL498	FSUL WC596	CSA
<b>RECEPTACLES</b>								
L1020R	20	125/250	Single Receptacle		L10-20R	•	•	
L1120R	20	3ø, 250	Single Receptacle		L11-20R	•	•	
L1220R	20	3ø, 480	Single Receptacle		L12-20R	•	•	
<b>CONNECTORS IP20 SUITABILITY</b>								
L1020C	20	125/250	Black Back, White Front Body	.225"-1.150"	L10-20R	•	•	•
L1120C	20	3ø, 250	Black Back, White Front Body	.225"-1.150"	L11-20R	•	•	•
L1220C	20	3ø, 480	Black Back, White Front Body	.225"-1.150"	L12-20R	•	•	•
<b>PLUGS IP20 SUITABILITY</b>								
L1020P	20	125/250	Black Back, White Front Body	.225"-1.150"	L10-20P	•	•	•
L1120P	20	3ø, 250	Black Back, White Front Body	.225"-1.150"	L11-20P	•	•	•
L1220P	20	3ø, 480	Black Back, White Front Body	.225"-1.150"	L12-20P	•	•	•
<b>FLANGED INLETS &amp; OUTLETS</b>								
L1020FI	20	125/250	Gray Inlet		L10-20P	•		•
L1020FO	20	125/250	Gray Outlet		L10-20R	•		
L1120FO	20	3ø, 250	Gray Outlet		L11-20R	•		
L1220FI	20	3ø, 480	Gray Inlet		L12-20P	•		•
L1220FO	20	3ø, 480	Gray Outlet		L12-20R	•		



Reference Pages G-38 and G-39 for Accessories.


CATALOG NUMBER	DESCRIPTION	COLOR
<b>WEATHERPROOF COVER</b>		
WPG2	Cover for 20 and 30A Turnlok Flanged Inlets and Outlets	Gray
<b>STAINLESS STEEL WALL PLATE</b>		
SS720	Wall Plate for Locking Receptacles	302/304 S/S



WPG2

# TECHNICAL SPECIFICATIONS

## 20A Turnlok® Receptacles




### 20A Receptacle

#### Typical Specifications

Manufacturer's Identification: Pass & Seymour® L520R  
 Description: Locking Receptacle, Power Supply  
 Type: 2 Pole, 3 Wire Grounding  
 Rating: 20A, 125V  
 Configuration: NEMA L5-20R  
 3rd Party Compliance: UL Listed, File Number E146159, Standard UL498, Attachment Plugs and Receptacles. Federal Specification WC596. CSA Certified, File Number LR1765, Standard CSA-C22.2 No. 42, General Use Receptacles and Attachment Plugs. Conforms to NEMA WD-1 and WD-6.

AMPS	CATALOG NUMBER	NEMA CONFIG. NO.	AMPS	CATALOG NUMBER	NEMA CONFIG. NO.
20	<input type="checkbox"/> L520R	L5-20R	20	<input type="checkbox"/> L1420R	L14-20R
20	<input type="checkbox"/> CRL520R	L5-20R	20	<input type="checkbox"/> L1520R	L15-20R
20	<input type="checkbox"/> L620R	L6-20R	20	<input type="checkbox"/> L1620R	L16-20R
20	<input type="checkbox"/> L720R	L7-20R	20	<input type="checkbox"/> L1820R	L18-20R
20	<input type="checkbox"/> L820R	L8-20R	20	<input type="checkbox"/> L1920R	L19-20R
20	<input type="checkbox"/> L920R	L9-20R	20	<input type="checkbox"/> L2020R	L20-20R
20	<input type="checkbox"/> L1020R	L10-20R	20	<input type="checkbox"/> L2120R	L21-20R
20	<input type="checkbox"/> L1120R	L11-20R	20	<input type="checkbox"/> L2220R	L22-20R
20	<input type="checkbox"/> L1220R	L12-20R	20	<input type="checkbox"/> L2320R	L23-20R

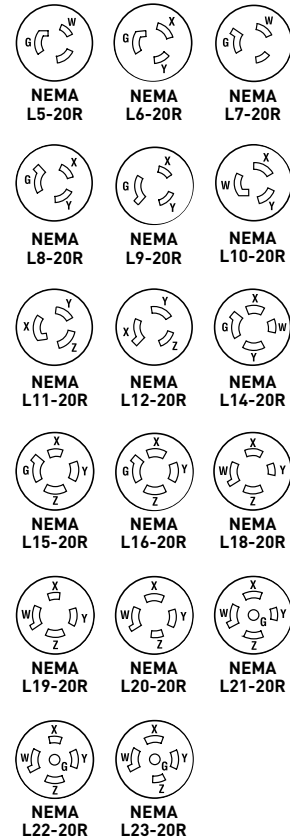

#### Performance

##### Electrical

Dielectric Withstand Voltage: 2000V minimum  
 Maximum Working Voltage: 600VAC  
 Current Interrupting: Certified for current interrupting at full-rated current  
 Temperature Rise: 30°C max. after 50 cycles at 150% rated current

##### Mechanical

Terminal Accommodation: #14 AWG min. – #10 AWG max.  
 Product Identification: Amperage, Voltage, NEMA Configuration molded into face

##### Environmental

Flammability: UL94 V2  
 Operating Temperature: Maximum continuous +75°C, minimum -40°C without impact

#### Materials

	Standard	Corrosion-Resistant
Front Body:	Nylon	Nylon
Back Body:	Nylon	Nylon
Mounting Strap:	Brass	Nickel-Plated Brass
Pressure Plate:	Brass	Nickel-Plated Brass
Contacts:	Brass	Nickel-Plated Brass
Terminal Clamps:	Brass	Nickel-Plated Brass
Terminal Screws:	Brass	Brass
Mounting Screws:	Zinc-Plated Steel	Stainless Steel

Consult Turnlok® Section G for complete compliance listing.

<b>Project</b>
<b>Location/Type</b>