



# SLATER® PLASTIC BOXES

## Wood & Steel Stud Bracket Boxes With Offset Bracket for Wood and/or Steel Mounting

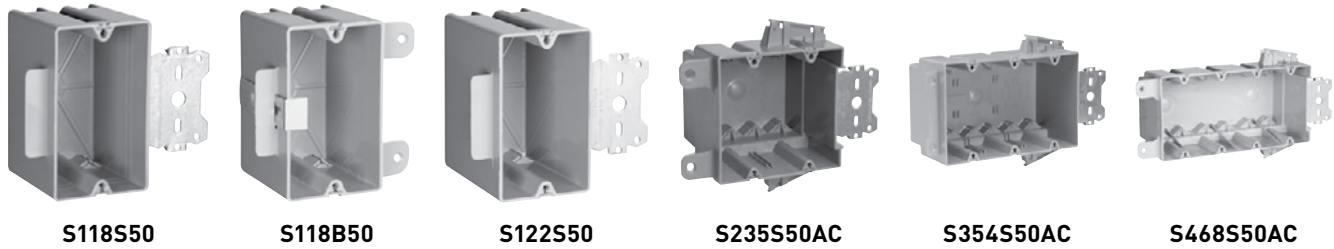

CATALOG NUMBER	CU. IN. VOL.	DESCRIPTION	DIMENSIONS			WIRE FILL (AWG)	QTY. PER CARTON
			L	W	D		
<b>WOOD &amp; STEEL STUD BRACKET BOXES WITH QUICK/CLICK®</b>							
S118S50	18.0	Single gang. $\frac{3}{8}$ " offset for wood and steel stud mounting. 2 Quick/Entries® each end. For use with $\frac{3}{8}$ " to $\frac{5}{8}$ " wallboard.	3 $\frac{3}{4}$	2 $\frac{1}{4}$	2 $\frac{23}{32}$	9 No. 14 8 No. 12 7 No. 10	100
S118B50	18.0	Single gang. $\frac{1}{2}$ " offset for wood and steel stud mounting. Rear stabilizing bar virtually eliminates inward movement. 2 Quick/Entries® each end. For use with $\frac{3}{8}$ " to $\frac{5}{8}$ " wallboard.	3 $\frac{3}{4}$	2 $\frac{1}{4}$	2 $\frac{3}{4}$	9 No. 14 8 No. 12 7 No. 10	100
S235S50AC	35.0	Two gang. $\frac{3}{8}$ " offset for wood and steel stud mounting. 4 Auto/Clamps® each end. For use with $\frac{3}{8}$ " to $\frac{5}{8}$ " wallboard.	3 $\frac{31}{32}$	3 $\frac{31}{32}$	3 $\frac{3}{8}$	17 No. 14 15 No. 12 14 No. 10	50
S354S50AC	54.0	Three gang. $\frac{3}{8}$ " offset for wood and steel stud mounting. 6 Auto/Clamps® each end. For use with $\frac{3}{8}$ " to $\frac{5}{8}$ " wallboard.	3 $\frac{3}{4}$	5 $\frac{25}{32}$	3	27 No. 14 24 No. 12 21 No. 10	25
S468S50AC	68.0	Four gang. $\frac{3}{8}$ " offset for wood and steel stud mounting. Rear stabilizing bar virtually eliminates inward movement. 6 Auto/Clamps® each end. For use with $\frac{3}{8}$ " to $\frac{5}{8}$ " wallboard.	3 $\frac{3}{4}$	7 $\frac{13}{16}$	3	34 No. 14 30 No. 12 27 No. 10	25
<b>DEEP WOOD &amp; STEEL STUD BRACKET BOXES WITH QUICK/CLICK®</b>							
S122S50	22.5	Single gang deep. $\frac{3}{8}$ " offset for wood and steel stud mounting. 2 Quick/Entries® each end. For use with $\frac{3}{8}$ " to $\frac{5}{8}$ " wallboard.	3 $\frac{3}{4}$	2 $\frac{1}{4}$	3 $\frac{3}{8}$	11 No. 14 10 No. 12 9 No. 10	100

All boxes are UL Listed.  
UL Classified for 2 Hour Fire Resistance. (Does not apply to S468S50AC.)

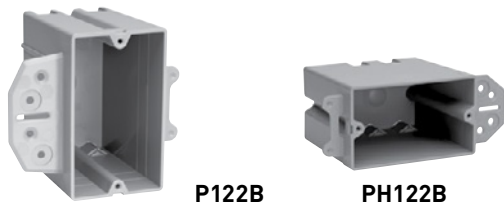

CATALOG NUMBER	CU. IN. VOL.	DESCRIPTION	DIMENSIONS			WIRE FILL (AWG)	QTY. PER CARTON
			L	W	D		
<b>STEEL STUD BRACKET BOXES WITH QUICK/CLICK®</b>							
S122B	22.0	Single gang. $\frac{1}{2}$ " offset for steel stud mount only. 2 stabilizer legs.	3 $\frac{3}{4}$	2 $\frac{1}{4}$	4 $\frac{1}{4}$	11 No. 14 10 No. 12 9 No. 10	100
SH122B	22.0	Single gang. Horizontal. $\frac{1}{2}$ " offset for wood or steel stud mount. 2 stabilizer legs.	3 $\frac{3}{4}$	2 $\frac{1}{4}$	3 $\frac{3}{8}$	11 No. 14 10 No. 12 9 No. 10	100
<b>STEEL STUD BRACKET BOXES</b>							
P122B	22.0	Single gang. $\frac{1}{2}$ " offset for steel stud mount only. 2 stabilizer legs.	3 $\frac{3}{4}$	2 $\frac{1}{4}$	4 $\frac{1}{4}$	11 No. 14 10 No. 12 9 No. 10	100
PH122B	22.0	Single gang. Horizontal. $\frac{1}{2}$ " offset for wood or steel stud mount. 2 stabilizer legs.	3 $\frac{3}{4}$	2 $\frac{1}{4}$	3 $\frac{3}{8}$	11 No. 14 10 No. 12 9 No. 10	100
S50BRACKET	N/A	Steel stud bracket only for use with P235RAC, P354RAC, S235RAC, S354RAC, S468RAC	N/A	N/A	N/A	N/A	50

All boxes are UL Listed. UL Classified for 2 Hour Fire Resistance.

All devices listed on this page conform to NEMA OS2.