


Single Speed Fans (On/Off)

WhisperValue™ | Ideal Multi-Family Solution

FV-05VS3	50 CFM	4" Oval Duct
FV-08VS3	80 CFM	4" Oval Duct
FV-10VS3E	100 CFM	4" Oval Duct



Fits in nearly every ceiling cavity.

WhisperValue Key Benefits:

- Ideal for residential construction (single and multi-family) and manufactured homes
- 3-3/8" housing depth – lowest profile ENERGY STAR® fan available
- UL approved for ceiling or wall mount – perfect fit in a 2 x 4 stud bay
- Wall installation eliminates the need and cost for a radiation damper
- Optional 24 gauge steel, fire code rated 4" oval to 3" round duct adapter, sold separately (Model # FV-VS43R)
- UL listed for tub/shower enclosure when GFCI protected
- Can be used to comply with ASHRAE 62.2, LEED, IAP, California Title 24 and WA Ventilation Code

WhisperValue™

Transfer Register Box

FV-JD



Transfer Register Box (TRB) – Room to Room Solution Key Benefits:

- **Designed exclusively for use with WhisperValue™ fan and fan/light combinations**
- Perfect for room-to-room powered circulation in Multi-family projects with ductless heat pumps
- Powered 60 CFM transfer at less than 0.3 sone (based on FV-05VS3 fan)
- 26 gauge steel, fire code rated accessory, sold separately as model #FV-JD
- No need for a radiation damper like on jump ducts
- Works with standard size HVAC registers – 4" x 10" HVAC supply grille
- Can be used to comply with ASHRAE 62.2, LEED for Homes, CALGreen and ENERGY STAR® for Homes 3.0*

*Specific to WhisperValue™ and WhisperValue Lite™ fans

WhisperValue	FV-05VS3		FV-08VS3		FV-10VS3E	
Characteristics	4" Oval Duct		4" Oval Duct		4" Oval Duct	
Static pressure in inches w.g.	0.1	0.25	0.1	0.25	0.1	0.25
Air Volume (CFM)	60	53	80	72	100	88
Noise (sones)	0.4	1.0	0.6	0.9	1.0	1.3
Power Consumption (Watts)	15.9	16.3	21.2	21.5	26.7	26.4
Energy Efficiency (CFMs/Watt)	3.8	3.3	3.8	3.3	3.8	3.4
Speed (RPM)	706	980	778	997	870	1049
Current (amps)	0.13	0.14	0.18	0.18	0.23	0.23
Power Rating (V/Hz)	120/60		120/60		120/60	



Optional 4" Oval to 3" Round Duct Adapter (Model #: FV-VS43R)

WhisperValue U-Can Contractor Pack*


The Contractor Pack includes four complete fans. The housing and motor/grille are packaged separately for flexibility during installation.

Universal Housing Can	Motor/Grille Assembly	Complete Fan Unit	Master Pack
FV-05-10VSA3	FV-05VSB3	FV-05VS3	4
FV-05-10VSA3	FV-08VSB3	FV-08VS3	4
FV-05-10VSA3	FV-10VSB3E	FV-10VS3E	4

*Must order in quantities of 4, shipment will contain 1 box with 4 units.



WhisperValue Fan & Transfer Register Box

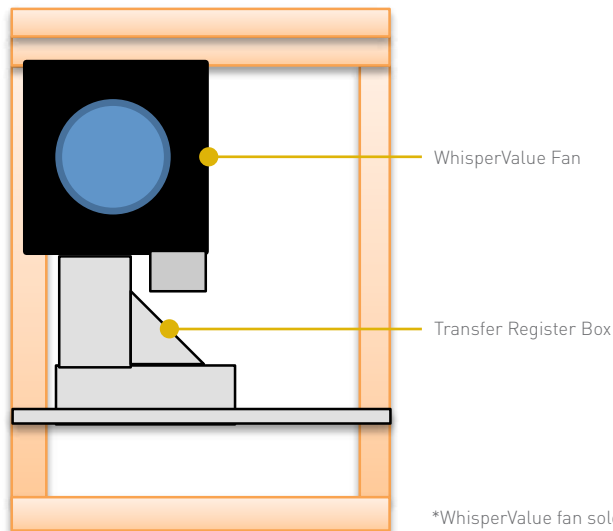

*WhisperValue fan sold separately.

Single Speed Fans with Lights (On/Off)

WhisperValue Lite™ | Ideal Multi-Family Fan/Light Solution

FV-08VSL3 80 CFM 4" Oval Duct
FV-10VSL3E 100 CFM 4" Oval Duct



3-3/8"
Depth
Lowest profile,
perfect fit
in a 2 x 4!

Fits in nearly every ceiling cavity.

WhisperValue Lite Key Benefits*:

- Ideal for residential construction (single and multi-family) and manufactured homes
- 3-3/8" housing depth – lowest profile ENERGY STAR® fan available
- L-shaped bracket simplifies installation and provides strong support
- UL approved for ceiling or wall mount – perfect fit in a 2 x 4 stud bay
- Wall installation eliminates the need for a radiation damper
- (2) 13W self ballasted GU24 base CFL lamps and a 4W night light
- UL listed for tub/shower enclosure when GFCI protected
- Can be used to comply with ASHRAE 62.2, LEED, IAP, California Title 24 and WA Ventilation Code

*Optional 4" oval to 3" round duct adapter (FV-VS43R) and Transfer Register Box (FV-JD) sold separately. See page 26-27 for details.



WhisperValue Lite	FV-08VSL3		FV-10VSL3E	
Characteristics	4" Oval Duct		4" Oval Duct	
Static pressure in inches w.g.	0.1	0.25	0.1	0.25
Air Volume (CFM)	80	72	100	88
Noise (sones)	0.5	0.7	1.0	1.1
Power Consumption (Watts)	22.5	22.9	27.3	27.0
Energy Efficiency (CFMs/Watt)	3.6	3.1	3.7	3.3
Speed (RPM)	825	1021	896	1059
Current (amps)	0.19	0.19	0.23	0.22
Power Rating (V/Hz)	120/60		120/60	



INCLUDES: (2) 13W ENERGY STAR® rated self ballasted GU24 base CFL lamps and a 4W night light. 3500 Kelvin/ 80+ CRI/997 Lumens per lamp/75 Lumens per watt/ 10,000 hours rated average life at 3 hours per start.



Optional 4" Oval to 3" Round Duct Adapter (Model #: FV-VS43R)



Optional Transfer Register Box (Model #: FV-JD)

WhisperValue Lite U-Can Contractor Pack*

The Contractor Pack includes four complete fans. The housing and motor/grille are packaged separately for flexibility during installation.

Universal Housing Can	Motor/Grille Assembly	Complete Fan Unit	Master Pack
FV-08-10VSLA3	FV-08VSLB3	FV-08VSL3	4
FV-08-10VSLA3	FV-10VSLB3E	FV-10VSL3E	4

*Must order in quantities of 4, shipment will contain 1 box with 4 units.

