

## TYPE LFK COMMERCIAL FAN-FORCED WALL HEATER

- For supplementary heating of offices, reception rooms, game rooms, family rooms and similar light-duty commercial and residential applications.
- 1500, 2000, 3000, 4000 and 4800 watts at 240 volts; 60 hz.
- Steel finned metal sheath electric heating elements with low sheath temperature provide uniform heat and long service life.
- Rugged stamped steel front cover provides a down-flow air pattern and is attractively finished in Northern white. A hole plug is provided for tamper resistant installations.
- Integral double pole thermostat with positive off.
- Thermal overload protector disconnects power in event of overheating due to accidental blockage.
- Built-in fan delay switch energizes fan motor only after elements are heated...prevents discharge of unheated air. When heat shuts off, de-energizes fan motor after residual heat has been dissipated.
- Can be wired with standard 90°C wire.
- Permanently lubricated totally enclosed fan motor provides long life and low maintenance; gently distributes warmth throughout room area. 100 CFM.
- Recess or surface mount in standard 2" x 4" stud walls (Recess mounting is standard; surface-mounting frame LFK-SM for full surface mounting, LFKS-1 for 1" recess, and LFKS-2 for 2" recess are optional accessory - 19-3/16" high x 15-3/4" wide.)




### SELECTION CHART

CATALOG NO.	VOLTS	WATTS	PH	BTU/HR.	AMPS
LFK151	120	1500	1	5120	12.5
LFK204	240	2000	1	6826	8.3
LFK304	240	3000	1	10239	12.5
LFK404	240/208	4000/3000	1	13652/10239	16.7/14.4
LFK484	240/208	4800/3600	1	16382/12287	20.9/17.3
LFK4083	208	4000	3	13652	11.1
LFK487	277	4800	1	16382	17.3
LFK488	208	4800	1	16382	23.1
LFK4883	208	4800	3	16382	13.3

### ACCESSORIES

CAT. NO.	DESCRIPTION
LFKSM	Surface mounting frame for surface installations. Painted to match heater decor. 3-13/16" deep.
LFKS-1	1" deep surface mounting frame for semi-recessed installation.
LFKS-2	2" deep surface mounting frame for semi-recessed installation.
LFK-SFC	14 gauge security front cover.

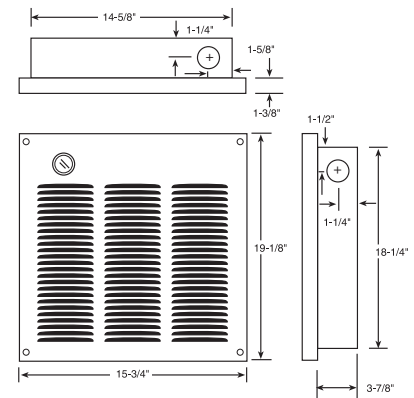

### MOUNTING LIMITATIONS

Do not install heater closer than 8" from floor or adjacent wall surface, behind towel rack or door, upside down or side up, in floor, ceiling or closet.

