


wallpacks

26W Low-profile

With an impressive 2849 lumens, this 26 Watt low-profile wallpack delivers a lot of footcandles from mounting heights up to 22 feet.

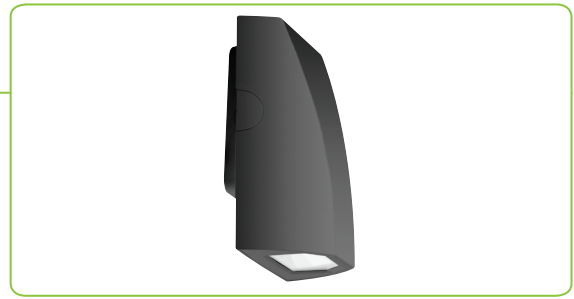

Performance

Equivalent 175W MH
Replaces 100-175W MH

Color Temperature (CCT)	3000K	4000K	5000K
Input Watts	30	30	30
Output Lumens	3452	3523	3516
Lumens Per Watt	116	117	118
Color Accuracy (CRI)	70	72	71

Specifications

UL Listing

Suitable for mounting within 4' of the ground.
Suitable for wet locations as downlight and uplight.
Wall mount only.

Lifespan

100,000-hour LED lifespan based on IES LM-80 results and TM-21 calculations

Drivers

Constant Current, 720mA, Class 2 with 6 kV surge protection, 120V: 0.27A; 208V: 0.17A; 240V: 0.15A; 277V: 0.13A; 50/60 Hz, THD ≤20%, Power Factor: 99%

Cold Weather Starting

Minimum starting temperature is -40°C (-40°F).

Ambient Temperature

Suitable for use in 40°C (104°F)

Thermal Management

Cast aluminum system for optimal heat dissipation to extend LED lifespan

Housing

Precision die-cast aluminum housing

Lens

Tempered glass

Mounting

Heavy-duty die-cast aluminum back box with hinged housing for easy installation.

Reflector

Vacuum metalized polycarbonate for smooth light distribution and low glare

Gaskets

High-temperature silicone. O-Ring gasketed plug.

IESNA LM-79 & LM-80 Testing


RAB LED luminaires have been tested by an independent NVLAP Certified laboratory in accordance with IESNA LM-79 and LM-80, and have received the Department of Energy "Lighting Facts" label.

IP Rating

Ingress Protection rating of IP66 for dust and water.


Easy mounting

Junction box has knockouts to match every recessed box



Stay level

Integrated bubble level for no-guesswork installation



Easy access

A "third hand" rest for easy wiring



Ordering information

Product Family

SLIM

Wattage

26

Color Temp

Blank 5000K
N 4000K
Y 3000K

Finish Color

Blank Bronze
W White

Driver Options

/DC 0 - 10V dimming


Photocell Options

/PC 120V
/PC2 277V

Photometrics

SLIM26

26W LED at 22' Mounting Height

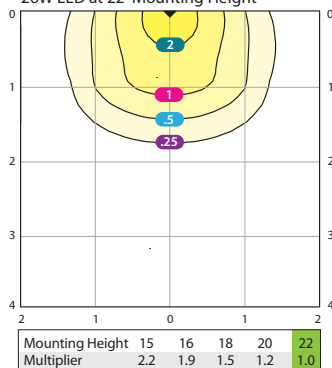

Grid Scale:
 Multiples of mounting height,
 values shown in footcandles


Recessed LED module and
 optimized reflector provide
 smooth light distribution with
 no hot spots and low glare.

RAB lighting design engineers
 can create a custom lighting
 layout for your job. For free.

Photometric Report #ITL81610

Dimensions & weight

Weight: 4.5 lbs / 2.0 kg

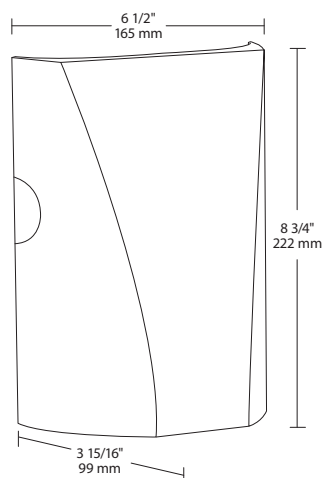

SUITABLE FOR WET LOCATIONS



5-Year
 No Compromise
 Warranty



Fully Shielded,
 Full Cutoff Optics



For use on LEED buildings
 to attain Light Pollution
 Reduction Credit



COMPLIANT
 See rabweb.com/title24



LED Product Partner



ADA COMPLIANT



Please visit rabweb.com to
 see which models are DLC
 or DLC Premium listed.