


# Load Centers

## Catalog Numbering System

### Catalog Numbering System

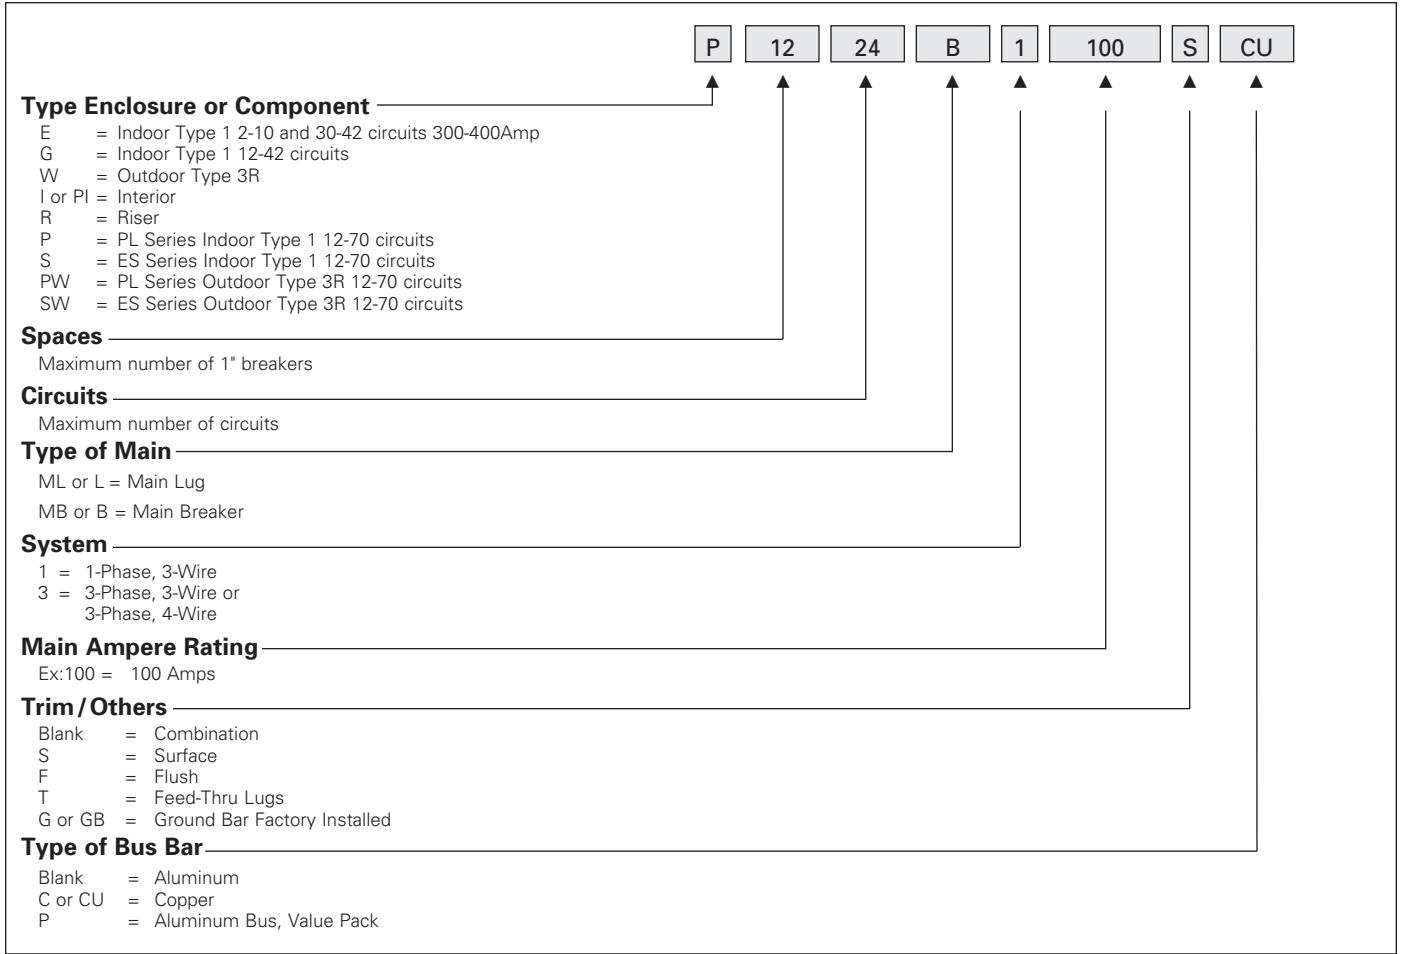

#### Products Shown In Sections 1 of this Speedfax Meet or Exceed the Following Standards.


- UL50 — Electric Cabinets and Boxes
- UL67 — Electric Panelboards
- UL486 — Wire Connectors
- UL489 — Molded-Case Circuit Breakers
- UL869 — Service Equipment
- UL943 — Ground Fault interrupters (Class A — Personnel Protection)
- Federal Specification W-P-115b — Panel Power Distribution
- Federal Specification W-C-375B — Circuit Breakers
- NEC
- NEMA 250

#### Underwriters' Laboratories, Inc. Reference File Numbers:

- Series Connected Circuit Breaker Information is recognized by UL under file #E10848(N)
- Load Centers Listed by UL under file #E10703
- Load Centers UL recognized components found under file #E10703, Volume 6 and 7. (Also referenced under the recognized components directory — section QEUY2)
- EQ Circuit Breakers are Listed by UL under file #E82615

# PL Series 3-Phase Unassembled Load Centers

3-phase, 3-wire, 240 Volt AC or 3-phase, 4-wire, 120/240 or 120/208 Volts AC

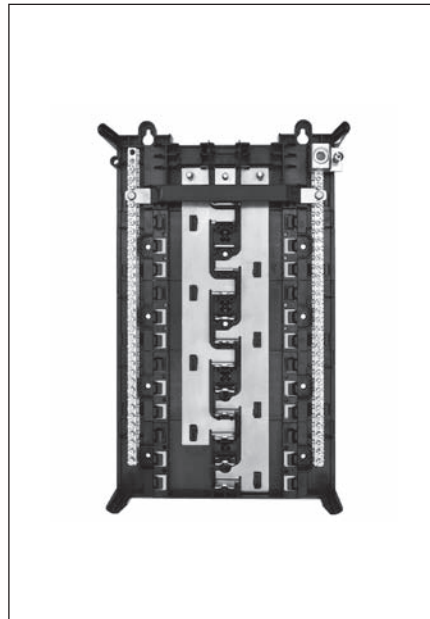

1  
LOAD CENTERS &  
CIRCUIT BREAKERS

## Main Breaker Convertible Unassembled Load Centers

24-70 Circuits / 100-225 Amperes

Copper Bus<sup>⑤</sup>  
60/75°C Rated 22,000A IR<sup>①</sup>

Interiors				Enclosure		Trim Kit	
Amp Rating	No. of Spaces	No. of Circuits	Interior Catalog Number	Enclosure Height (inches) <sup>③</sup>	Enclosure Catalog Number	No. Breaker Spaces	Trim Catalog Number <sup>④</sup>
100	30	42	PI3042B3100CU <sup>②</sup>	30	3PE30	30	PT3042B3100
150	24	42	PI2442B3150CU	36	3PE36	24	PT2442X3150
200	30	54	PI3054B3200CU	39	3PE39	30	PT3054X3200
200	42	60	PI4260B3200CU	42	3PE42	42	PT4260X3200
225	54	70	PI5470B3225CU	49	3PE49	54	PT5470X3225

## Main Lug Convertible Unassembled Load Centers

12-70 Circuits / 125-225 Amperes

Copper Bus<sup>⑤</sup>  
60/75° Rated 100,000A IR<sup>⑥</sup>

Interiors				Enclosure		Trim Kit	
Amp Rating	No. of Spaces	No. of Circuits	Interior Catalog Number	Enclosure Height (inches) <sup>③</sup>	Enclosure Catalog Number	No. Breaker Spaces	Trim Catalog Number <sup>④</sup>
125	12	24	PI1224L3125CU	21	3PE21	12	PT1224L3125
200	24	42	PI2442L3200CU	36	3PE36	24	PT2442X3200
200	30	54	PI3054L3200CU	39	3PE39	30	PT3054X3200
225	42	60	PI4260L3225CU	42	3PE42	42	PT4260X3225
225	54	70	PI5470L3225CU	49	3PE49	54	PT5470X3225

① May be installed on higher rated systems when protected by a circuit breaker with a higher AIR rating.  
② Back fed main breaker.  
③ Indoor enclosures are 14 1/4" wide by 3 7/8" deep.

④ Trim catalog numbers with a "B" indicate for use with main breaker and is not convertible. "L" indicates for use with main lug and is not convertible. "X" indicates can be used with convertible interior.

⑤ All load center interiors are provided with tin plated copper bus bars.  
⑥ Rated 100,000A IR in series with breakers listed on wiring diagram.