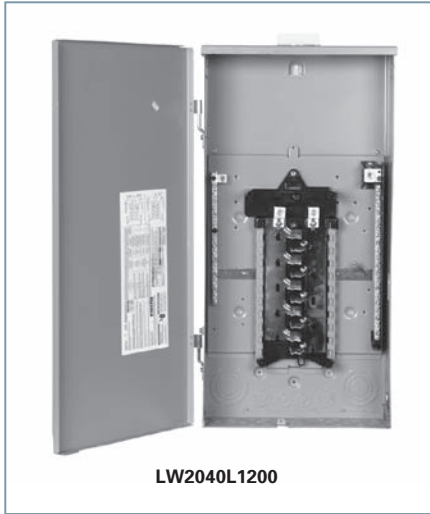


# Rock Solid Load Centers<sup>®</sup>

**MURRAY**

 Main Lug Only, 1Ø, 65,000 AIC<sup>①</sup>, Main Lug Panels 3-Wire 120/240V AC or 208Y/120V AC, Insulated and Bonded Split Neutrals


LW2040L1200

Load centers on this page through 225 amp feature a split neutral insulated bars. For service entrance applications, install bonding strap, and use both bars for neutral and ground conductors. For non service entrance applications, do not install bonding strap and use insulated bars for neutral conductors and bonded bar for ground conductors.

## 12-42 Circuit, 125–225 Amperes

Amps Max.	No. of Spaces	Max. Circuit	Indoor Type 1 <sup>②</sup>	Dimensions <sup>③</sup>			Outdoor Type 3R <sup>②④</sup>	Dimensions <sup>③</sup>		
			Catalog Number	Height <sup>⑤</sup>	Width	Depth	Catalog Number	Height	Width	Depth
125	12	24	LC1224L1125	18	14 $\frac{3}{8}$	4	LW1224L1125	20	14 $\frac{1}{4}$	4 $\frac{1}{2}$
125	16	32	LC1632L1125	21	14 $\frac{3}{8}$	4	LW1632L1125	29	14 $\frac{1}{4}$	4 $\frac{1}{2}$
125	20	40	LC2040L1125	21	14 $\frac{3}{8}$	4	LW2040L1125	29	14 $\frac{1}{4}$	4 $\frac{1}{2}$
125	30	40	LC3040L1125	30	14 $\frac{3}{8}$	4	—	—	—	—
150	16	32	LC1632L1150	24	14 $\frac{3}{8}$	4	—	—	—	—
150	24	40	LC2440L1150	30	14 $\frac{3}{8}$	4	—	—	—	—
200	12	24	—	—	—	—	LW1224L1200	29	14 $\frac{1}{4}$	4 $\frac{1}{2}$
200	20	40	LC2040L1200	24	14 $\frac{3}{8}$	4	LW2040L1200	29	14 $\frac{1}{4}$	4 $\frac{1}{2}$
200	24	40	LC2440L1200	30	14 $\frac{3}{8}$	4	—	—	—	—
200	30	40	LC3040L1200	30	14 $\frac{3}{8}$	4	LW3040L1200	38	14 $\frac{1}{4}$	4 $\frac{1}{2}$
200	40	40	LC4040L1200	36	14 $\frac{3}{8}$	4	—	—	—	—
225	40	60	LC4060L1225	36	14 $\frac{3}{8}$	4	—	—	—	—

## Copper Bus<sup>⑤</sup>

Amps Max.	No. of Spaces	Max. Circuit	Indoor Type 1 <sup>②</sup>	Dimensions <sup>③</sup>			Outdoor Type 3R <sup>②</sup>	Dimensions <sup>③</sup>		
			Catalog Number	Height <sup>⑤</sup>	Width	Depth	Catalog Number	Height	Width	Depth
125	20	40	LC2040L1125CU	21	14 $\frac{3}{8}$	4	—	—	—	—
200	20	40	LC2040L1200CU	24	14 $\frac{3}{8}$	4	—	—	—	—
200	30	40	LC3040L1200CU	30	14 $\frac{3}{8}$	4	—	—	—	—
200	40	40	LC4040L1200CU	36	14 $\frac{3}{8}$	4	—	—	—	—
225	12	24	—	—	—	—	LW1224L1225CU	29	14 $\frac{1}{4}$	4 $\frac{1}{2}$
225	42	42	LC4242L1225CU	39	14 $\frac{3}{8}$	4	LW4242L1225CU	42	14 $\frac{1}{4}$	4 $\frac{1}{2}$

<sup>①</sup>100-225A only.

<sup>②</sup>Standard package quantity equal to 1.

<sup>③</sup>Dimensions shown are representative of outside box length, width & depth ( $\pm \frac{1}{8}$ "") and do not include allowance for mounting bumps, endwalls, hubs or hardware

 protrusions. Allow approximately 1 $\frac{1}{2}$ " additional in length and width dimensions for surface or combination overhang. Consult factory for specific details if required.

<sup>④</sup>Hub provision only. Closure plate included. Panels through 225A require HS type hub; panels over 225A require HV type hub. See accessories page 3-8 for hub selection.

<sup>⑤</sup>Copper bus load centers are recommended for those applications where the environment may be severe (ie farm and coastal areas).

<sup>⑥</sup>Units manufactured after April 10, 2014 are UL listed for Siemens and Murray Breakers

<sup>⑦</sup>Heights shown are for Series A. Original series heights are listed on page 3-10.

## Cross References

### Murray 3-Phase Cross Reference to New SKUs

(See Section 1 for full offering)		
Legacy Murray SKU	ES™ Series Part No.	PL™ Series Part No.
LC1224B3100CU	S1224B3100	P1224B3100CU
LC1224L3125CU	S1224L3125	P1224L3125CU
LC1224L3200CU	S1224L3200	No equivalent
LC1836B3100CU	No equivalent	No equivalent
LC1836L3150CU	S1836L3150	No equivalent
LC1836L3200CU	S2442L3200	No equivalent
LC2442L3150CU	S2442L3150	P2442L3200CU
LC3042B3150CU	S4242B3150	P4242B3150CU
LC3042B3200CU	S3054B3200	P3054B3200CU
LC3042L3200CU	S3054L3200	P3054L3200CU
LC4242B3200CU	S4260B3200	P4260B3200CU
LC4242B3225CU	S4242B3225	P4260B3225TCU/P4260B3225CU
LC4242L3225CU	S4260L3225	P4260L3225CU
LW1224L3125CU	SW1224L3125	PW1224L3125CU
LW1836L3150CU	SW1836L3150	No equivalent
LW3042B3200CU	SW3054B3200	PW3054B3200CU
LW3042L3200CU	SW3054L3200	PW3054L3200CU
New	S3042B3100	—
New	S5470L3225	—
New	SW1224L3200	—
New	SW2442L3150	—
New	SW2442L3200	—
New	SW4260L3225	—
New	S3030B3100	—
New	SW2442B3150	—
New	SW4260B3200	—
New	SW4242B3225	—
New	—	P3042B3100CU

### New Murray Heights

Load Center	Height	
	Original	Series A
LC1224B1100	18	18
LC1224L1125	21	18
LC1224L1125P	21	18
LC1632B1150	24	24
LC1632B1200	30	24
LC1632L1125	21	21
LC1632L1150	24	24
LC2040B1100	24	21
LC2040B1100CU	24	21
LC2040B1100P	24	21
LC2040B1150	30	30
LC2040B1200	30	30
LC2040B1200CU	30	30
LC2040B1200P	30	30
LC2040L1125	24	21
LC2040L1125CU	24	21
LC2040L1200	30	24
LC2040L1200CU	30	24
LC2440B1100	24	24
LC2440B1150	30	30
LC2440B1200	30	30
LC2440L1150	30	30
LC2440L1200	30	30
LC2448B1100	24	24
LC2448B1100P	24	24
LC3040B1100	30	30
LC3040B1150	36	36
LC3040B1200	36	36
LC3040B1200CU	36	36
LC3040B1200P	36	36
LC3040L1125	30	30
LC3040L1200	36	30
LC3040L1200CU	36	30
LC3054B1200	36	36
LC3060B1200P	36	36
LC4040B1200	39	36
LC4040B1200CU	39	36
LC4040B1200P	39	36
LC4040L1200	39	36
LC4040L1200CU	39	36
LC4060B1200	39	36
LC4060L1225	39	36
LC4242L1225CU	42	39
LC4260B1200	42	39
LC4260B1200P	42	39