

Mini-Rester™

Residential Water Hammer Arrester



660-SB
1/2" male sweat



660-V82B
1/2" male CPVC



660-H
3/4" hose thread



660-2
1/2" MIP thread



660-TB
5/8" compression tee



660-TRB
5/8" O.D. compression
x 5/8" O.D. female
compression




660-TKB
female x male
ballcock thread



660-TKB



660-TRB

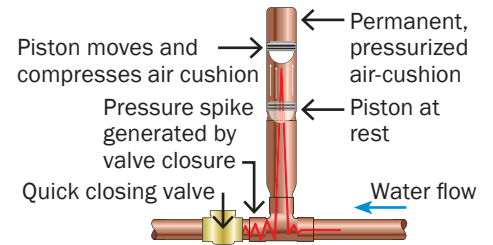

- All Mini-Resters are approved for sealed wall installations with no access panel required
- Certified by ASSE as AA size to the ANSI/ASSE 1010-2004 Standard
- May be installed at any angle

Hydra-Rester®

Commercial Water Hammer Arrester



653-BS



653-B

- A-F unit sizes with 1/2" - 1" connection sizes
- Certified by the American Society of Sanitary Engineering to the ANSI/ASSE 1010-2004 Standard
- Lifetime cycle tested to withstand 10,000 shock cycles

Vacu-Rester™

Vacuum Breaker Arrester



652-AD

- 1/2" - 1" connection sizes
- To prevent cavitation and accompanying water hammer within the extra-long tub spout tubes and/or shower risers of high-flow fixtures, such as garden tub valves and multi-head shower valves

Prime Perfect™

Trap Primer Valve



695-01

- Automatically activates to replenish evaporated water in floor drain traps to prevent the escape of sewer gases
- Large port openings in debris screen prevent clogging from sediment and debris
- Water release is factory set. No field adjustment necessary
- Single trap primer can service up to eight traps using splitter and distributors
- Certified by the American Society of Sanitary Engineering to the ASSE 1018-2001 Standard

