

DWV PIPE HANGER

553 series

Hangs Tuff™

Item # Submitted	_____
Job Name	_____
Location	_____
Engineer	_____
Contractor	_____
PO#	_____ TAG _____

SPECIFICATION

Sioux Chief's 553 series Hangs Tuff™ DWV pipe hanger shall be used where necessary to secure Schedule 40 DWV piping according to all national code requirements. Hanger shall be 100% corrosion proof and UV resistant. Hanger shall be impact resistant to 0°F, and be able to withstand temperatures up to 140°F.

Hanger shall have two preloaded nails, which shall be rust resistant, zinc plated yellow irradiate. Preloaded nails shall have a continuous ring shank to provide a more permanent installation.

Hanger shall feature I-beam design for strength and rigidity with a locking finger device that is designed to hold the pipe in place when installed at all angles.

MATERIALS

hanger: ABS, U.V. resistant, corrosion-proof, impact-resistant


nail: 1 $\frac{5}{8}$ " rust-resistant, zinc-coated, yellow irradiate, continuous ringshank

SAFE WORKING LOAD

	1 $\frac{1}{2}$ "	2"	3"	4"
<i>cradle</i> :	40 lbs.	50 lbs.	45 lbs.	40 lbs.
<i>inverted</i> :	15 lbs.	15 lbs.	15 lbs.	15 lbs.

DIMENSIONS

	1 $\frac{1}{2}$ "	2"	3"	4"
A: Length to center of pipe	8 $\frac{5}{8}$ "	8 $\frac{15}{16}$ "	9 $\frac{7}{16}$ "	9 $\frac{15}{16}$ "
B: Length of hanger	10"	10 $\frac{1}{2}$ "	11 $\frac{3}{4}$ "	12 $\frac{3}{8}$ "
C: Length to gripping finger	7 $\frac{1}{2}$ "	7 $\frac{1}{2}$ "	7 $\frac{1}{2}$ "	7 $\frac{1}{2}$ "
D: Distance between nailways	1"	1"	1"	1"

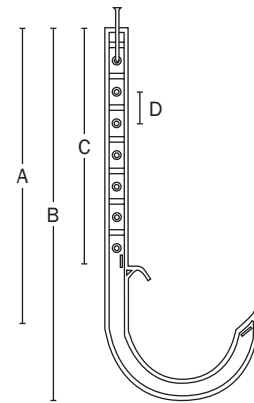

Create Item Number

553- A B

e.g. 553-8W = white 3" Sch. 40 Hangs Tuff

- A** PIPE SIZE
- 6 1 $\frac{1}{2}$ " Sch. 40
 - 7 2" Sch. 40
 - 8 3" Sch. 40
 - 830 3" Sch. 30*
 - 9 4" Sch. 40

- B** COLOR
- W white
 - _ (blank) black

* 3" Sch. 30 only available in white. (553-830W)