



ACCU-FLO DIMENSIONS

Size	Product#	Conn	A		B		C		D		Material		Approx. Weights		Cv Full Open Position
			In.	mm	In.	mm	In.	mm	In.	mm	Body	Venturi	lbs.	kg	
1/2"	ACUF-050-AC	Sweat	3-3/4	82	2	51	2	51	1-1/2	38	Bronze	Brass	7/8	.4	2.12
	ACUF-050-AT	NPT	3-3/4	82	2	51	2	51	1-1/2	38	Bronze	Brass	7/8	.4	
3/4"	ACUF-075-AC	Sweat	3-3/4	82	2-1/8	54	2-1/8	54	1-1/2	38	Bronze	Brass	7/8	.4	3.9
	ACUF-075-AT	NPT	3-3/4	82	2-1/8	54	2-1/8	54	1-1/2	38	Bronze	Brass	1-1/4	.6	
1"	ACUF-100-AC	Sweat	4	101	2-1/8	57	2-1/8	54	1-5/8	41	Bronze	Brass	1-1/8	.5	8.4
	ACUF-100-AT	NPT	4	101	2-1/8	57	2-1/8	54	1-5/8	41	Bronze	Brass	1-3/8	.6	
1-1/4"	ACUF-125-AC	Sweat	5-1/8	130	2-1/2	63	2-1/2	60	2	51	Bronze	Brass	3-1/8	1.4	17.3
	ACUF-125-AT	NPT	5-1/8	130	2-1/2	63	2-1/2	60	2-1/4	57	Bronze	Brass	3-1/4	1.5	
1-1/2"	ACUF-150-AC	Sweat	5-7/8	149	2-5/8	67	2-5/8	64	2-3/16	56	Bronze	Brass	3-3/4	1.7	28.3
	ACUF-150-AT	NPT	5-7/8	149	2-5/8	67	2-5/8	64	2-3/4	70	Bronze	Brass	4-3/8	2.0	
2"	ACUF-200-AC	Sweat	6-3/4	171	2-3/4	70	2-3/4	70	2-3/4	70	Bronze	Brass	5-7/8	2.7	62.3
	ACUF-200-AT	NPT	6-3/4	171	2-3/4	70	2-3/4	70	3-3/8	86	Bronze	Brass	7	3.2	
2-1/2"	ACUF-250-AF	Flanged	8	200	3-5/8	92	---	---	7	178	Cast Iron	TFE	24	10.9	122
3"	ACUF-300-AF	Flanged	8-3/16	255	4	102	---	---	7-1/2	191	Cast Iron	TFE	32	14.3	212
4"	ACUF-400-AF	Flanged	10	250	4-3/4	121	---	---	9	229	Cast Iron	TFE	60	26.9	444

1/2" - 2" SWEAT AND THREAD

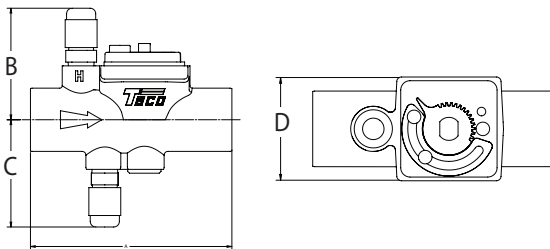

2-1/2", 3", 4" FLANGED

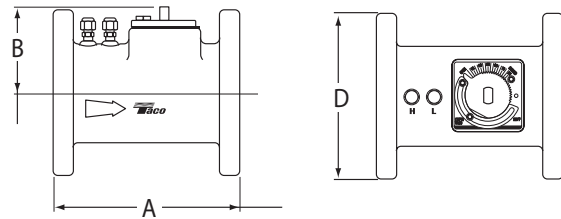

FLOW MEASUREMENT CHART

