

Model 009 Cartridge Circulator

The High Velocity series Taco 009 cartridge circulator is designed for quiet, efficient operation in higher-head/lower-flow applications for hydronic heating, radiant in-floor/panel heating, solar heating, heat recovery, and domestic water recirculation systems. Its unique field-serviceable cartridge contains all moving parts. Replacing the cartridge rebuilds the circulator. With no mechanical seal, the self-lubricating, maintenance free design provides unmatched reliability. Available in Cast Iron or Stainless Steel construction.



Submittal Data Information Model 009 Cartridge Circulator

Submittal Data # 101-032
Supersedes: 09/1/03

Effective: 02/10/09

Features

- Standard high capacity output-compact design
- Quiet, efficient operation
- Direct drive - Low power consumption
- Unique replaceable cartridge design - Field serviceable
- Self lubricating
- No mechanical seal
- Unmatched reliability - Maintenance free
- Universal flange to flange dimensions
- Cast Iron or Stainless Steel construction

Materials of Construction

Casing (Volute):	Cast Iron or Stainless Steel
Stator Housing:	Aluminum
Cartridge:	Stainless Steel
Impeller:	Non-Metallic
Shaft:	Ceramic
Bearings:	Carbon
O-Ring & Gaskets:	EPDM

Model Nomenclature

F – Cast Iron, Flanged
SF – Stainless Steel, Flanged

Variations:

Z – Zoning Circulator
J – Bronze cartridge with Cast Iron casing

Performance Data

Flow Range: 0 – 10 GPM
Head Range: 0 – 35 Feet
Minimum Fluid Temperature: 40°F (4°C)
Maximum Fluid Temperature: 230°F (110°C)
Maximum Working Pressure: 125 psi
Connection Sizes: 3/4", 1", 1-1/4", 1-1/2" Flanged





FOR INDOOR USE ONLY

Application


The Taco 009 is designed for a wide range of residential and light commercial higher-head/lower-flow water circulating applications. Typical uses include hydronic heating, radiant in-floor/panel heating and closed-loop solar heating systems. The Stainless Steel 009 can be used in higher-head/lower-flow heat recovery, open-loop solar heating and light commercial domestic water recirculation systems. The unique replaceable cartridge contains all of the moving parts and allows for easy service, instead of replacing the entire circulator. Compact, direct-drive, low power consumption design is ideal for high-efficiency jobs.

Pump Dimensions & Weights

Model	Casing	A		B		C		D		F		G		Ship Wt.	
		in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	lbs.	Kg
009-F5	Cast Iron	7	178	5-11/16	144	3-3/16	81	3-5/16	84	4-1/8	105	6-3/8	162	9.5	4.3
009-SF5	St. Steel	7	178	5-11/16	144	3-3/16	81	3-5/16	84	4-1/8	105	6-3/8	162	9.5	4.3



Mounting Positions

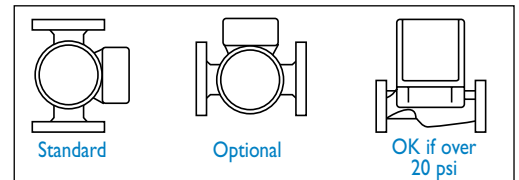


Electrical Data

Model	Volts	Hz	Ph	Amps	RPM	HP
009-F5	115	60	1	1.40	3250	1/8
009-SF5	115	60	1	1.40	3250	1/8

Motor Type: Permanent Split Capacitor
Impedance Protected

Motor Options: 220/50/1, 220/60/1, 230/60/1, 100/110/50/60/1

Flange Orientation



Performance Field - 60Hz

