

A 44

Repair and Installation Kits

B-10K B-0107 Spray Valve Repair Kit

- Repairs B-0107 spray valves:
 - 2 (000895-45) Spring
 - 2 (000974-45) Bonnet washer
 - 2 (010476-45) Hose washer
- 2 (001100-45) Packing stem
- 2 (009306-20) Valve stem
- 2 (001040-45) Bonnet binding washer
- 2 (012915-45) Seat washer
- 1 (007861-45) Spray head ring
- 1 (000913-45) Spray face screw
- 1 (001121-45) Spray face



B-0108 and B-0108-C JeTSpray Valve Repair Kits

SPRAY FACE Repair Kits:

- B-0108-C Low Flow (0.65 GPM): 108CSF-RK
- B-0108 Standard (1.42 GPM): 108SF-RK

• TRIGGER Repair Kit: 108T-RK

₩ JeTSpray



B-23K Spring Check Spindle Assembly Replacements

- Includes:
 - 1 (002711-40) Left-hand Eterna spindle with spring check
 - 1 (002712-40) Right-hand Eterna spindle with spring check


B-0114-RK Pre-Rinse Repair Kit

- B-0114 style pre-rinse unit repair kit. Includes materials to repair both knuckles and elbow:
 - 2 (009228-40) Knuckle joint asy. 1 (009227-40) Elbow joint asy.




B-0230-K Installation Kit B-0230 Style Faucets

- Installation kit includes:
- 2 1/2" supply nipples
- 2 Locknuts
- 2 Washers
- 2 Lock washers
- 2 Male and female short elbows



Inlet Product Options

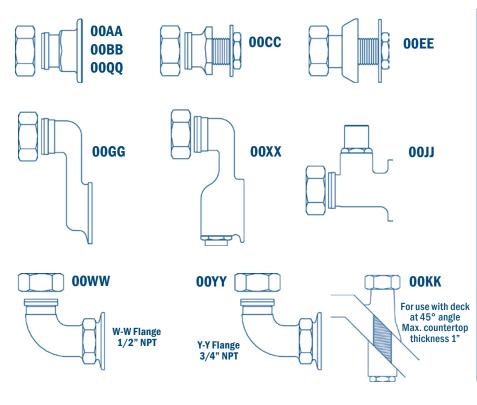

Union Coupling Inlets

The following inlets are polished chrome plated and used on mixing faucets to meet varying conditions of installation. All are interchangeable and are used in lieu of the "OOAA" inlets which are ordinarily furnished on faucets using union coupling inlets. All are available in rough chrome if specified. To order, add suffix letter to faucet model number. For example: "B-0230-CC" sink mixing faucet with 1/2" NPT male inlet, 1" (25 mm) long.

OOAA 1/2" NPT female eccentric flanged inlet
OOBB 3/4" NPT female eccentric flanged inlet
OOCC 1/2" NPT male inlet. 1" (25 mm) long

OOCC 1/2" NPT male inlet, 1" (25 mm) long OOEE 1/2" NPT male inlet with adjustable

flange, 1" (25 mm) long
OOGG 1/2" NPT female flanged adjustable inlet

OOXX 1/2" NPT female flanged adjustable inlet with screwdriver stop

OOJJ 1/2" NPT female inlet with loose key stop

OOWW 1/2" NPT female flange 90° inlet
OOYY 3/4" NPT female flange 90° inlet
OOKK 1/2" NPT male inlet for use on 45° decks.

Inlet is at 45° angle to mounting face

OOQQ 3/8" NPT female eccentric flanged inlet



Heavy-Duty Water Guns

T&S heavy-duty water guns are designed for use on hose reels, washdown stations and general sanitizing operations in a broad variety of commercial and institutional applications.

MV-2516 Series Rear Trigger Water Guns

 Heavy-duty stainless steel construction. designed for long life

 Adjustable stream from solid to soft spray

- Excellent for cleaning jobs
- Controls water supply easily and efficiently
- Automatic shut-off conserves water
- Rated up to 200 psi
- Blue rubber cover
- Various models available; see chart on p. E32

MV-2522 Series Front Trigger Water Guns

 Heavy-duty stainless steel construction, designed for long life

- Adjustable stream from solid to soft spray
- Excellent for cleaning jobs
- Controls water supply easily and efficiently
- Automatic shut-off conserves water
- Rated up to 200 psi
- Blue rubber cover
- Various models available; see chart on p. E32

Note: See page E32 for

charts showing the

configuration of T&S

heavy-duty water gun

models that are available.





NEW! Aluminum water gun with 5/16" flow orifice

MV-3516-25

Aluminum Rear Trigger Water Gun

- Blue rubber cover
- Includes 1/2" NPT x 3/8" NPT female adapter (not shown)
- Weighs 1/2 lb. less than MV-2516 and MV-2522 water guns
- Variable spray patterns
- Drip-free automatic shut-off

MV-2516 and MV-2522 Water Gun Replacement Parts:

014087-45 5/16" and 7/16" Orifice, Rear Trigger Cartridge Asm. 014132-45 9/16" Orifice, Rear Trigger Cartridge Assembly **014086-45** 5/16" and 7/16" Orifice, Front Trigger Cartridge Asm.

014187-45 Blue Rubber Cover (used on both style guns)

014131-45 9/16" Orifice, Front Trigger Cartridge Assembly

Spray Valves / Repair Kits

B-0107 Spray Valve

- 1.42 GPM at 60 PSI
- · Connects directly to hose
- Designed for heavy use in industrial kitchens
- Shuts off when handle is released
- Add "-01M" suffix to hose reel model to specify this spray valve



EB-0107 **Spray Valve**

- Blue spray valve
- 4.0+ GPM at 60 PSI flow
- Connects directly to hose
- Designed for heavy use in industrial kitchen settings
- Shuts off when handle is released
- Add "-01" suffix to hose reel model to specify this spray valve



MV-3516 Models and Kit:

PT x 1/2" hose barb
PT x 3/4" hose barb
PT x 1" hose barb
PT female inlet
516-24 repair kit

B-10K B-0107 Spray Valve Repair Kit

2	(000895-45) (000974-45)	Spring Bonnet washer	2	(001040-45)	Bonnet binding washer
		Hose washer		(012915-45)	
		Packing stem	1	(007861-45)	Spray head ring
2	(009306-20)	Valve stem			Spray face screw
	•		1	(001121-45)	Spray face

EB-10K EB-0107 Spray Valve Repair Kit

4	(000974-45)	Bonnet washer	1	(011475-45)	Blue spray head
2	(010476-45)	Hose washer		,	ring ',
2	(001100-45)	Packing stem	1	(000913-45)	Spray face screw
2	(009306-20)	Valve stem	ĺ	(011456-45)	Blue spray face
2	(001040-45)	Bonnet binding		(000895-45)	
	(washer		,	1 3
_	(010015 45)	6	_		

2 (012915-45) Seat washer bonnet asy.