


Nozzles, Goosenecks and Spouts

Swing Nozzles

SERIES 1
OUTLETS

- Nozzle tip has male threads with a stream regulator



Model No.	Standard Sizes Length	Clearance
059X	6" (152 mm)	2-5/16" (59 mm)
060X	8" (203 mm)	2-15/16" (74 mm)
061X	10" (254 mm)	3-5/8" (92 mm)
062X	12" (305 mm)	4-3/8" (111 mm)
063X	14" (356 mm)	5" (127 mm)
064X	16" (406 mm)	5-13/16" (147 mm)
065X	18" (457 mm)	6-3/8" (162 mm)

059XM	Master Box (12)	064XM	Master Box (12)
060XM	Master Box (12)	065XM	Master Box (12)
061XM	Master Box (12)	060XP	Plain end outlet
062XM	Master Box (12)	062XP	Plain end outlet
063XM	Master Box (12)		

Note: Use Series 1 outlets on these swing nozzles

Swivel Gooseneck

SERIES 1
OUTLETS

- Nozzle tip has male threads with a stream regulator

SERIES 2
OUTLETS



Model No.	Standard Sizes Spread	Height	Clearance
131X	2-13/16" (71 mm)	4-3/4" (120 mm)	2-9/16" (65 mm)
132X	2-5/8" (67 mm)	9-1/16" (230 mm)	5-9/16" (142 mm)
133X	5-11/16" (145 mm)	10-3/8" (264 mm)	6-3/8" (162 mm)
134X	7-3/4" (192 mm)	11-7/16" (290 mm)	5-1/2" (139 mm)
135X	8-3/4" (223 mm)	12-1/16" (306 mm)	5-9/16" (141 mm)
136X	12-1/4" (310 mm)	14-11/16" (373 mm)	5-3/8" (137 mm)

Swivel Gooseneck/Stream Regulator:

131X-ADA	ADA gooseneck
131XM	Master Box (6)
132XM	Master Box (6)
133XM	Master Box (6)
135XM	Master Box (6)

Swivel Gooseneck/Plain End Spout:


132XP	Same as 132X except with plain end
133XP	Same as 133X except with plain end
134XP	Same as 134X except with plain end

Note: Use Series 2 outlets on these goosenecks except for 131X and 133X, which use Series 1 outlets

Double-Joint Nozzles

SERIES 1
OUTLETS

- Nozzle tip has male threads with a stream regulator

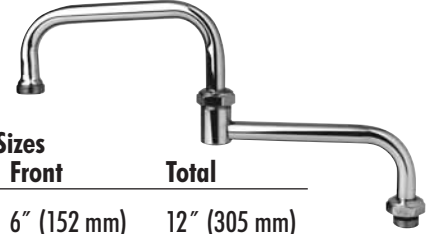

Model No.	Standard Sizes Back	Front	Total
066X	6" (152 mm)	6" (152 mm)	12" (305 mm)
067X	9" (229 mm)	6" (152 mm)	15" (381 mm)
068X	12" (305 mm)	6" (152 mm)	18" (457 mm)
069X	12" (305 mm)	12" (305 mm)	24" (610 mm)

Double-Joint Nozzle Sections

151X	6" (152 mm) back section
152X	9" (229 mm) back section
153X	6" (152 mm) front section

Note: Use Series 1 outlets on these nozzles

Rigid Gooseneck

SERIES 2
OUTLETS

- Nozzle tip has 3/8" NPSM outlet with a stream regulator



Model No.	Standard Sizes Spread	Height	Clearance
119X	2-3/4" (70 mm)	8-3/4" (222 mm)	5-1/4" (133 mm)
120X	5-1/2" (140 mm)	10-1/4" (261 mm)	5-5/16" (135 mm)
122X	5-1/2" (140 mm)	11-1/2" (292 mm)	6-7/16" (164 mm)
123X	5-1/2" (140 mm)	12-1/2" (318 mm)	7-1/2" (190 mm)
124X	5-1/2" (140 mm)	13-1/2" (343 mm)	8-9/16" (217 mm)
125X	5-1/2" (140 mm)	14-1/2" (368 mm)	9-9/16" (243 mm)
126X	5-1/2" (140 mm)	15-1/2" (394 mm)	10-1/2" (267 mm)
127X	7-5/8" (194 mm)	10-1/2" (267 mm)	4-1/2" (114 mm)
128X	7-5/8" (194 mm)	13-1/2" (343 mm)	7-9/16" (192 mm)
129X	8-5/8" (219 mm)	11-3/4" (298 mm)	5-1/2" (140 mm)
130X	12-3/16" (310 mm)	13-3/8" (340 mm)	4-9/16" (116 mm)
165X	4-1/16" (103 mm)	8-1/4" (210 mm)	4-13/16" (122 mm)

Rigid Gooseneck/Stream Regulator:

120XM	Master Box (6)
-------	----------------

Rigid Gooseneck/Plain End Spout:

120XP	Same as 120X except with plain end
122XP	Same as 122X except with plain end
129XP	Same as 129X except with plain end

Note: Use Series 2 outlets on these goosenecks

These base faucets are not equipped with spring check spindle assemblies. They are not for use with pre-rinse units.



This combination has parts which must be ordered separately.

1-800-476-4103 (East Coast)
1-800-423-0150 (West Coast)

Nozzles

Swing Nozzle



C
16

Same Base Faucets cont. on p. C18 and C19
 Other nozzles for these faucets cont. on page C18

Base Faucets



See p. C15



See p. C15

B-0200-LN Swivel Base Faucet

- Double pantry faucet, deck-mounted
- Lever handles
- Single hole base faucet with 4" spreader unit
- 1-1/8" (25 mm) shank
- Furnished with 1/4" NPT tailpieces

B-0205-LN Swivel Base Faucet

- Single pantry faucet, deck-mounted
- Lever handle (specify cold or hot)
- 1/2" NPSM single shank
- Furnished with 1/4" NPT tailpiece

059X 6" (152 mm)

B-0202
B-0202-CR ceramic cartridges

B-0207
B-0207-CR ceramic cartridges
B-0207-M Master Box (6)

060X 8" (203 mm)



061X 10" (254 mm)



062X 12" (305 mm)

B-0201
B-0201-CR ceramic cartridges
B-0201-M Master Box (6)

B-0206
B-0206-CR ceramic cartridges
B-0206-M Master Box (6)

065X 18" (457 mm)

B-0200
B-0200-M Master Box (6)
B-0200CR-PRISON

B-0205
B-0205-M Master Box (6)



These base faucets are not equipped with spring check spindle assemblies. They are not for use with pre-rinse units.



This combination has parts which must be ordered separately.

1-800-476-4103 (East Coast)
1-800-423-0150 (West Coast)

Base Faucets



See p. C15



See p. C23

B-0210-LN Swivel Base Faucet

- Wall mounted single pantry faucet
- Four-arm handles
- 1/2" NPT female flanged inlet
- Specify hot or cold

B-0240-LN Combination Sink Faucet

- Wall mounted mixing faucet
- Lever handles
- 2-1/4" (57 mm) to 8-1/4" (210 mm) centers adjustable inlet arms
- 1/2" NPT female flanged inlets
- Integral screwdriver stops

Nozzles

Swing Nozzle



059X 6" (152 mm)

B-0212

B-0242

060X 8" (203 mm)

B-0210-060X



061X 10" (254 mm)



062X 12" (305 mm)

B-0211

B-0241

065X 18" (457 mm)

B-0210

B-0240

Double-Joint Nozzle



066X 12" (305 mm)

B-0262



067X 15" (381 mm)

B-0261



068X 18" (457 mm)

B-0260
 B-0260-CR-177F ceramic cartridges with lever handle



Cast Nozzle



OSC6

B-0216
 B-0216-177F with lever handle

B-0243

Swivel Gooseneck



133X

B-0312

B-0343

The B-1110-LN, B-1115-LN, B-1120-LN and B-1125-LN series faucets are available with 2" (51 mm) long, 1/2" IPS shanks for mounting on thick counter tops, sinks, etc. To order, add -XS to model number. Ex.: B-1120-XS.

Base Faucets



See p. C27



See p. C27

B-1100-LN Workboard Faucet

- Deck-mounted
- Forged brass body
- Removable seats
- 6-1/2" (165 mm) long x 2" (51 mm) wide chrome plated escutcheon
- 3-1/2" (89 mm) centers
- 1" (25 mm) long shanks
- 1/2" NPT thread

B-1105-LN Workboard Faucet

- Splash back-mounted
- Forged brass body
- Removable seats
- 6-1/2" (165 mm) long x 2" (51 mm) wide chrome plated escutcheon
- 3-1/2" (89 mm) centers
- 1" (25 mm) long shanks
- 1/2" NPT thread

1-800-476-4103 (East Coast)
1-800-423-0150 (West Coast)

Nozzles

Swing Nozzle



059X 6" (152 mm)

B-1100
B-1100-M Master Box (6)

B-1105
B-1105-M Master Box (6)

060X 8" (203 mm)

B-1101

B-1106

061X 10" (254 mm)

B-1102
B-1102-M Master Box (6)

B-1107

062X 12" (305 mm)

B-1103
B-1103-M Master Box (6)

B-1108

Double-Joint Nozzle



068X 18" (457 mm)

B-1130

B-1135

Swivel Gooseneck



133X


B-1140

B-1145

Nozzles, Goosenecks and Spouts

Swing Nozzles

- Nozzle tip has male threads with a stream regulator



Model No.	Standard Sizes	
	Length	Clearance
059X	6" (152 mm)	2-5/16" (59 mm)
060X	8" (203 mm)	2-15/16" (74 mm)
061X	10" (254 mm)	3-5/8" (92 mm)
062X	12" (305 mm)	3-3/4" (95 mm)
063X	14" (356 mm)	5" (127 mm)
064X	16" (406 mm)	5-13/16" (147 mm)
065X	18" (457 mm)	6-3/8" (162 mm)

059XM	Master Box (12)	064XM	Master Box (12)
060XM	Master Box (12)	065XM	Master Box (12)
061XM	Master Box (12)	060XP	Plain end outlet
062XM	Master Box (12)	062XP	Plain end outlet
063XM	Master Box (12)		

Note: Use Series 1 outlets on these swing nozzles

Swivel Gooseneck

- Nozzle tip has male threads with a stream regulator



Model No.	Standard Sizes		
	Spread	Height	Clearance
131X	2-13/16" (71 mm)	4-3/4" (120 mm)	2-9/16" (65 mm)
132X	2-3/4" (70 mm)	9-1/16" (230 mm)	5-9/16" (142 mm)
133X	5-11/16" (145 mm)	10-3/8" (264 mm)	6-3/8" (162 mm)
134X	7-3/4" (192 mm)	11-7/16" (290 mm)	5-1/2" (139 mm)
135X	8-3/4" (223 mm)	12-1/16" (306 mm)	5-9/16" (141 mm)
136X	12-1/4" (310 mm)	14-11/16" (373 mm)	5-3/8" (137 mm)

Swivel Gooseneck/Stream Regulator:

131X-ADA	ADA gooseneck
131XM	Master Box (6)
132XM	Master Box (6)
133XM	Master Box (6)
135XM	Master Box (6)

Swivel Gooseneck/Plain End:

132XP	Same as 132X except with plain end
133XP	Same as 133X except with plain end
134XP	Same as 134X except with plain end

Note: Use Series 2 outlets on these goosenecks except for 131X and 133X, which use Series 1 outlets

Double-Joint Nozzles

- Nozzle tip has male threads with a stream regulator



Model No.	Standard Sizes		
	Back	Front	Total
066X	6" (152 mm)	6" (152 mm)	12" (305 mm)
067X	9" (229 mm)	6" (152 mm)	15" (381 mm)
068X	12" (505 mm)	6" (152 mm)	18" (457 mm)
069X	12" (305 mm)	12" (305 mm)	24" (610 mm)

Double-Joint Nozzle Sections

151X	6" (152 mm) back section
152X	9" (229 mm) back section
153X	6" (152 mm) front section

Note: Use Series 1 outlets on these nozzles

Rigid Gooseneck

- Nozzle tip has 3/8" NPSM outlet with a stream regulator



Model No.	Standard Sizes		
	Spread	Height	Clearance
119X	2-3/4" (70 mm)	8-3/4" (222 mm)	5-1/4" (133 mm)
120X	5-1/2" (140 mm)	10-1/4" (261 mm)	5-5/16" (135 mm)
122X	5-1/2" (140 mm)	11-1/2" (292 mm)	6-7/16" (164 mm)
123X	5-1/2" (140 mm)	12-1/2" (318 mm)	7-1/2" (190 mm)
124X	5-1/2" (140 mm)	13-1/2" (343 mm)	8-9/16" (217 mm)
125X	5-1/2" (140 mm)	14-1/2" (368 mm)	9-9/16" (243 mm)
126X	5-1/2" (140 mm)	15-1/2" (394 mm)	10-1/2" (267 mm)
127X	7-5/8" (194 mm)	10-1/2" (267 mm)	4-1/2" (114 mm)
128X	7-5/8" (194 mm)	13-1/2" (343 mm)	7-9/16" (192 mm)
129X	8-5/8" (219 mm)	11-3/4" (298 mm)	5-1/2" (140 mm)
130X	12-3/16" (310 mm)	13-3/8" (340 mm)	4-9/16" (116 mm)
165X	4-1/16" (103 mm)	8-1/4" (210 mm)	4-13/16" (122 mm)

Rigid Gooseneck/Stream Regulator:

120XM	Master Box (6)
-------	----------------

Rigid Gooseneck/Plain End:

120XP	Same as 120X except with plain end
122XP	Same as 122X except with plain end
129XP	Same as 129X except with plain end

Note: Use Series 2 outlets on these goosenecks