

## Viega ManaBloc® UL Listed Access Panel

### Description


The Viega ManaBloc uninsulated UL rated access panel provides access through openings in fire-rated vertical surfaces while providing a concealed appearance. The panel is available in one size for use with a 30 port ManaBloc. It can be mounted between a standard 16" on center stud spacing (wood or steel type) and/or in a masonry wall. The access panel includes two external locking options which include the use of a flush key or knurled knobs.

### Features

- 16 Gauge cold rolled steel frame
- 14 Gauge cold rolled steel door
- Baked on rust inhibitive gray prime finish
- Key or knob operated lock
- Spring door closure
- Flush continuous piano hinge

### Listings

cULus listed "B" label for 1½ hours in vertical surfaces (maximum temperature rise to 250°F in 30 minutes)

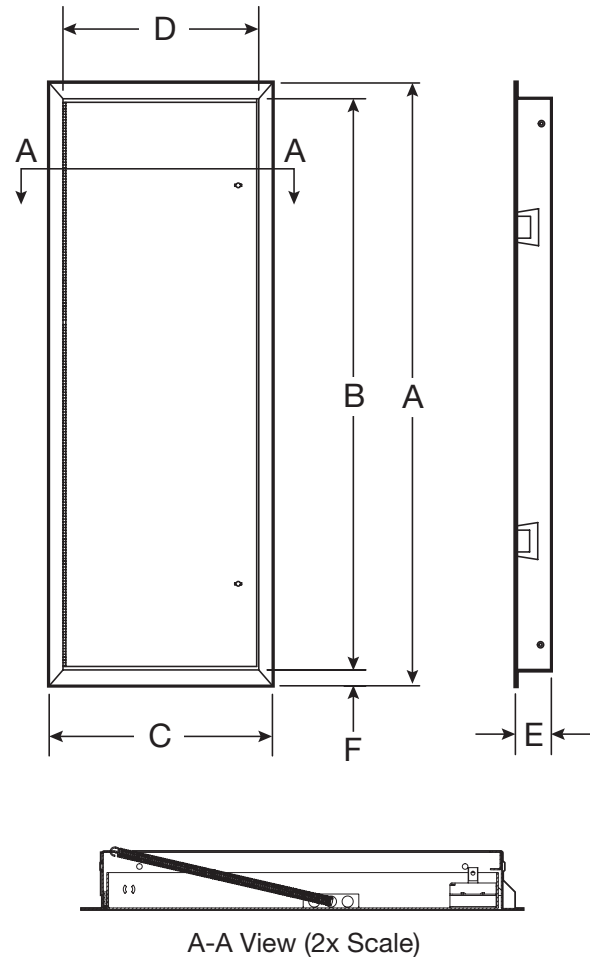

ManaBloc Access Panel							
Part No.	W x L (in)	A (in)	B (in)	C (in)	D (in)	E (in)	F (in)
50740	14 x 40	43	41	16.25	14.25	3	1

This document subject to updates. For the most current Viega technical literature please visit [www.viega.us](http://www.viega.us).  
Click Services -> Click Electronic Literature Downloads -> Select Product Line -> Select Desired Document

Viega LLC, 100 N. Broadway, 6<sup>th</sup> Floor • Wichita, KS 67202 • Ph: 800-976-9819 • Fax: 316-425-7618