

400, 800, 2300 & 2300D SERIES™ RACEWAYS

Two-Piece, Single- and Dual-Channel, Low Profile




Two-piece, single- and dual-channel, low profile raceway. Easy-to-install and ideal for power or communication installations.

CODE REFERENCE

cULus Listed Raceway:
File E90378 Guide RJTX.
Complies with flammability requirements of UL-5A.

Fittings:
File E90377 Guide RJYT.
Meets Article 388 of NEC.
UL Listed for up to 600V.
Meets Section 12-1600 of CEC.

400, 800, 2300 & 2300D Series Raceways System Layout

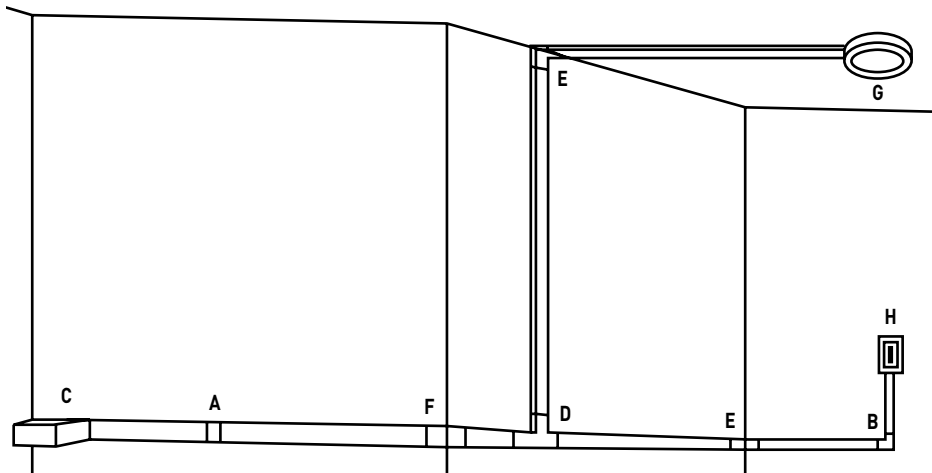

NOTE: Illustration is for showing product applications only.

KEY

- | | |
|---|--|
| A. 406, 806, 2306 Cover Clip | E. 417, 817, 2317, 2317DFO Internal Elbow |
| B. 411, 811, 2311, 2311DFO Flat Elbow Fitting | F. 418, 818, 2318, 2318DFO External Elbow |
| C. 810A2, 2310A, 2310DFO Entrance End Fitting | G. 2337A, 2338A Round Device Boxes |
| D. 415, 815, 2315 Tee | H. 2344, 2347, 2348 Sure-Snap Device Boxes |

COLOR OPTIONS



400, 800, 2300 Series Raceway Part Numbers with a "-WH" suffix have a white finish. Part Numbers without a suffix have an ivory finish. 400, 800, 2300 Series Raceways are paintable using latex paint.

Custom color options are also available. Consult the factory for more information.

400, 800, 2300 & 2300D SERIES™ RACEWAYS

Ordering Information

400 Series Raceway Wire Fill Capacities for Communications

	CABLE/WIRE SIZE	O.D. (Approx. Dia.)		40% FILL
		Inches	[mm]	
UNSHIELDED TWISTED PAIR	4-pair, 24 AWG, Cat 3	0.190	[4.8]	1
	4-pair, 24 AWG, Cat 5e	0.210	[5.3]	1
	4-pair, 24 AWG, Cat 6	0.250	[6.3]	1
	4-pair, 24 AWG, Cat 6a*	0.354	[9.0]	0
	25-pair, 24 AWG	0.410	[10.4]	0
COAXIAL	RG6/U	0.270	[6.9]	0
FIBER	ZipCord	0.118 x 0.236	[3 x 6]	1
	Round 4 Strand Fiber	0.187	[4.8]	1
	Round 6 Strand Fiber	0.256	[6.5]	1


400 Series Raceway Wire Fill Capacities for Power

WIRE SIZE THHN/THWN	O.D.		NO. OF CONDUCTORS
	Inches	[mm]	
14 AWG	0.111	[2.8]	5
12 AWG	0.130	[3.3]	3
10 AWG	0.164	[4.2]	0

NOTE: For additional information, refer to the Technical Section.

* Category 6 augmented (6a) cable for 10 gigabit ethernet – max allowed cable diameter per addenda No. 11 ANSI TIA/EIA 568-B.2.


Raceway Base and Cover



PART NUMBERS:
400BAC (Ivory)
400BAC-WH (White)

Low-profile, two-piece raceway with durable, textured PVC ivory or white finishes. Available in 5' [1.52m] lengths. Packed 100' [30.5m] per carton. Supplied with wide adhesive tape along its entire length.


Blank End Fitting



PART NUMBERS:
410B (Ivory)
410B-WH (White)

For closing open end of 400BAC Series Raceway.


Flat Elbow



PART NUMBERS:
411 (Ivory)
411-WH (White)


For right angle turns on same surface.

PVC-1 PVC Raceway Cutter




Regular duty cutter. Ideal for use with small nonmetallic raceways.

400WC Wire Clip



For holding conductors in place.


Tee



PART NUMBERS:
415 (Ivory)
415-WH (White)

For branching of raceway running at right angles.


Cover Clip



PART NUMBERS:
406 (Ivory),
406-WH (White)

For covering joint where two pieces of 400BAC Series Raceway Cover come together.

Internal Elbow



PART NUMBERS:
417 (Ivory)
417-WH (White)


For right angle turns around internal corners.

400, 800, 2300 & 2300D SERIES™ RACEWAYS

Ordering Information

400/800/2300/2300D Series Raceway Device Box Ordering Information (continued)

Device Box




PART NUMBERS:
2347 (Ivory)
2347-WH (White)
2347-2 (Ivory)
2347-2-WH (White)

2347 one-gang, 2347-2 two-gang. For standard switches and devices. 2347 Base has rectangular KO. 2347-2 Base has rectangular KO to enable extension from existing flush wall box and 1/2" and 1" concentric KOs. Accepts industry standard faceplates for switch and communication devices.

CAT. NO.	L	W	GANG
2347	4 3/4" [121mm]	3" [76mm]	1
2347-WH	4 3/4" [121mm]	3" [76mm]	1
2347-2	4 3/4" [121mm]	4 7/8" [124mm]	2
2347-2-WH	4 3/4" [121mm]	4 7/8" [124mm]	2


Magnetic Deep Device Box (with Grommet)



PART NUMBERS:
2348AMP (Ivory)
2348AMP-WH (White)

For deeper switches and devices, and has magnetic backing. Base has rectangular KO.


Device Box



PART NUMBERS:
2348D (Ivory)
2348D-WH (White)

For use with 2300D Series Divided Raceway. For mounting standard switches, receptacles, and industry standard faceplates for communication devices.

Deep Device Box




PART NUMBERS:
2348 (Ivory)
2348-WH (White)
2348-2 (Ivory)
2348-2-WH (White)
2348-3 (Ivory)
2348-3-WH (White)

2348 one-gang, 2348-2 two-gang, 2348-3 three-gang. For deeper switches and devices. 2348 Base has rectangular KO. 2348-2 and 2348-3 Bases have rectangular KO to enable extension from existing flush wall box and 1/2" and 1" concentric KOs. Accepts industry standard faceplates for switch and communication devices.

CAT. NO.	L	W	GANG
2348	4 3/4" [121mm]	3" [76mm]	1
2348-WH	4 3/4" [121mm]	3" [76mm]	1
2348-2	4 3/4" [121mm]	4 7/8" [124mm]	2
2348-2-WH	4 3/4" [121mm]	4 7/8" [124mm]	2
2348-3	4 3/4" [121mm]	7" [178mm]	3
2348-3-WH	4 3/4" [121mm]	7" [178mm]	3


Extra Deep Device Box



PART NUMBERS:
2344D (Ivory)
2344D-WH (White)

For use with 2300D Series Divided Raceway when additional depth is required. For mounting standard switches, receptacles and industry standard faceplates for communication devices.

Two-Gang Deep Divided Device Box




PART NUMBERS:
2344SD-2A (Ivory)
2344SD-2A-WH (White)

Divided two-gang box for use with 2300D Series Divided Raceway. Provides the ability to have both power and low voltage at a single point of use. Utilizes 5507 Series™ faceplates, as well as Wiremold Open System communication modules, Ortronics® TracJack, Series II, and Pass & Seymour® Activate Series inserts. For faceplate options, see 5507 Series™ Faceplates.

NOTE: CM-EPLA End Plates are required when using Wiremold CM2 communication modules and Pass & Seymour® Activate inserts. S2-EPL End Plates are required when using Ortronics® Series II inserts. To mount TracJack modules, use 55074TJ or 55076TJ Faceplates.

Shallow Device Box/Extension Box



PART NUMBERS:
2348S/51 (Ivory)
2348S/51-WH (White)

For shallow switches and receptacles. Base has rectangular KO.

TECHNICAL INFORMATION

Wiremold Device Boxes – Cubic Inch Capacities

CUBIC INCH CAPACITY OF WIREMOLD BOXES						
CAT. NO.	AVAILABLE INSIDE VOLUME		MAXIMUM NUMBER OF CONDUCTORS			
	cu. in.	[cm ³]	NO. 14	NO. 12	NO. 10	NO. 8
1542D	5.7	[93.0]	2	2	2	1
1546A	15.6	[255.0]	7	6	6	5
1546B	15.6	[255.0]	7	6	6	5
2337A	22.2	[364.0]	11	9	8	7
2338	15.9	[260.0]	7	7	6	5
2344	32.5	[532.0]	16	14	13	10
2344-2	53.1	[870.0]	26	23	21	17
2347	16.1	[264.0]	8	7	6	5
2347-2	26.4	[432.0]	13	11	10	8
2348	20.2	[331.0]	10	9	8	6
2348-2	32.9	[538.7]	16	14	13	11
2348-3	49.8	[816.8]	24	22	19	16
2348S/51	10.0	[164.0]	5	4	4	3
2642D	11.8	[194.0]	5	5	4	4
AL2044	28.3	[464.0]	14	12	11	9
AL2044-2	51.6	[846.0]	25	23	20	17
AL2044-3	82.3	[1348.0]	41	36	32	27
AL2047	17.3	[283.0]	8	7	6	5
AL2047-2	27.9	[458.0]	14	12	11	9
G2048	22.3	[366.0]	11	9	8	7
G2048-2	37.8	[619.0]	18	16	15	12
G3028	71.8	[1177.0]	35	31	28	23
G3044-2	107.4	[1760.0]	53	47	43	35
NM2044	32.5	[532.0]	16	14	13	10
NM2044-2	53.1	[870.0]	26	23	21	17
NM2048	20.2	[331.0]	10	9	8	6
NM2048-2	32.9	[538.7]	16	14	13	11
PSB1	20.2	[331.0]	10	9	8	6
PSB2	32.9	[538.7]	16	14	13	11
PSB3	49.8	[816.8]	24	22	19	16
R5752	29.7	[486.0]	14	13	11	9
R5753	59.9	[982.0]	30	26	24	20
V2048	22.3	[366.0]	11	9	8	7
V2048-2	37.8	[619.0]	18	16	15	12
V2448	22.3	[366.0]	11	9	8	7
V2448-2	37.8	[619.0]	18	16	15	12
V5719	10.3	[168.0]	5	4	4	3
V57240	10.2	[166.7]	5	4	4	3

CUBIC INCH CAPACITY OF WIREMOLD BOXES						
CAT. NO.	AVAILABLE INSIDE VOLUME		MAXIMUM NUMBER OF CONDUCTORS			
	cu. in.	[cm ³]	NO. 14	NO. 12	NO. 10	NO. 8
V57242	10.2	[167.1]	5	4	4	3
V57243G	10.2	[167.1]	5	4	4	3
V5733	5.7	[94.0]	2	2	2	1
V5734	17.2	[282.0]	8	7	6	5
V5734A	17.2	[282.0]	8	7	6	5
V5735	29.5	[484.0]	14	13	11	9
V5737	17.2	[282.0]	8	7	6	5
V5737A	22.2	[364.0]	11	9	8	7
V5738	17.2	[282.0]	8	7	6	5
V5738A	22.2	[364.0]	11	9	8	7
V5738AF	22.2	[364.0]	11	9	8	7
V5739	29.8	[488.0]	14	13	11	9
V5739A	29.8	[488.0]	14	13	11	9
V5741	17.7	[290.0]	8	7	7	5
V5744	34.4	[564.0]	17	15	13	11
V5744-2	58.9	[966.0]	29	26	23	19
V5744-3	80.3	[1316.0]	40	35	32	26
V5744S	28.8	[472.0]	14	12	11	9
V5744S-2	48.3	[792.0]	24	21	19	16
V5744S-3	66.9	[1096.0]	33	29	26	22
V5745	22.3	[366.0]	11	9	8	7
V5747	17.9	[294.0]	9	7	7	5
V5747-2	30.0	[491.0]	15	13	12	10
V5747-3	40.9	[670.0]	20	18	16	13
V5748	22.3	[366.0]	11	9	8	7
V5748-2	37.5	[614.0]	18	16	15	12
V5748-3	52.2	[856.0]	26	23	20	17
V5748-4	67.4	[1104.0]	33	29	27	22
V5748-5	80.9	[1324.9]	40	35	32	27
V5748-6	95.3	[1561.8]	47	42	38	31
V5748S	11.9	[195.0]	6	5	4	4
V5751	11.9	[195.0]	6	5	4	4
V5751-2	18.3	[300.0]	9	8	7	6
V5751-3	28.0	[458.8]	14	12	11	9
V5752	29.7	[486.0]	14	13	11	9
V5753	59.9	[982.0]	30	26	24	20
V5760	11.9	[195.0]	6	5	4	4

NOTE: When planning a layout, it is important to remember that it is permissible to make splices and taps in surface raceway equipped with a removable cover. Refer to ARTICLE 386-56 of the National Electrical Code.