

400, 800, 2300 & 2300D SERIES™ RACEWAYS

Two-Piece, Single- and Dual-Channel, Low Profile




Two-piece, single- and dual-channel, low profile raceway. Easy-to-install and ideal for power or communication installations.

CODE REFERENCE

cULus Listed Raceway:
File E90378 Guide RJTX.
Complies with flammability requirements of UL-5A.

Fittings:
File E90377 Guide RJYT.
Meets Article 388 of NEC.
UL Listed for up to 600V.
Meets Section 12-1600 of CEC.

400, 800, 2300 & 2300D Series Raceways System Layout

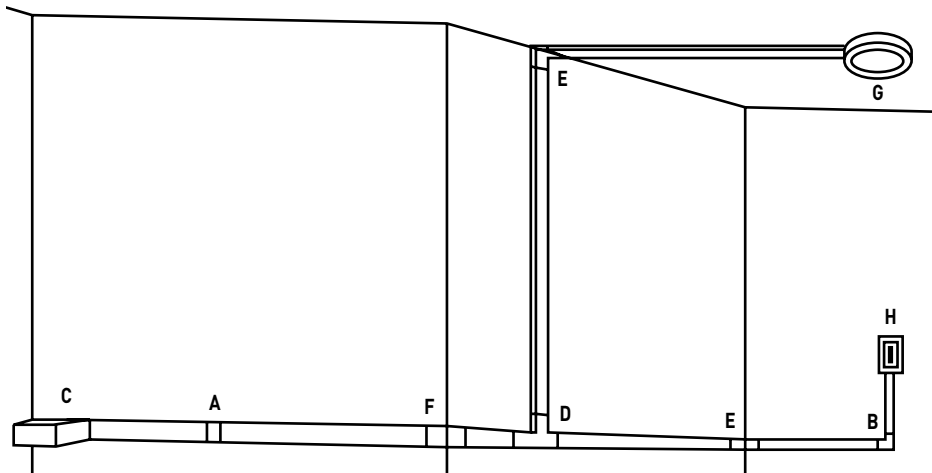

NOTE: Illustration is for showing product applications only.

KEY

- | | |
|---|--|
| A. 406, 806, 2306 Cover Clip | E. 417, 817, 2317, 2317DFO Internal Elbow |
| B. 411, 811, 2311, 2311DFO Flat Elbow Fitting | F. 418, 818, 2318, 2318DFO External Elbow |
| C. 810A2, 2310A, 2310DFO Entrance End Fitting | G. 2337A, 2338A Round Device Boxes |
| D. 415, 815, 2315 Tee | H. 2344, 2347, 2348 Sure-Snap Device Boxes |

COLOR OPTIONS




400, 800, 2300 Series Raceway Part Numbers with a "-WH" suffix have a white finish. Part Numbers without a suffix have an ivory finish. 400, 800, 2300 Series Raceways are paintable using latex paint.

Custom color options are also available. Consult the factory for more information.

400, 800, 2300 & 2300D SERIES™ RACEWAYS

Ordering Information


Reducing Connector



PART NUMBERS:
2389A (Ivory)
2389A-WH (White)

For transitioning from 2300 Series Raceway to 400 Series Raceway.


Radiused Divided Internal Elbow



PART NUMBERS:
2317DFO (Ivory)
2317DFO-WH (White)

A 90° internal corner with integral dividers provide 2" [51mm] cable bend radius for UTP and fiber optic installations.


Radiused Divided Entrance End Fitting



PART NUMBERS:
2310DFO (Ivory)
2310DFO-WH (White)

Divided fitting to feed 2300 and 2300 Divided Series Raceway. Includes 1/2", 3/4", and 1" trade size KOs on back and top.


Radiused Divided External Elbow



PART NUMBERS:
2318DFO (Ivory)
2318DFO-WH (White)

A 90° external corner with integral dividers provide 2" [51mm] cable bend radius for UTP and fiber optic installations.

Radiused Divided Flat Elbow




PART NUMBERS:
2311DFO (Ivory)
2311DFO-WH (White)

A 90° flat corner with integral dividers provide 2" [51mm] cable bend radius for UTP and fiber optic installations.

400/800/2300/2300D Series Raceway Device Box Ordering Information


Blank Cover



PART NUMBERS:
2336 (Ivory)
2336-WH (White)

Use with any nonmetallic round device box to convert into a junction box.


Fixture Box



PART NUMBERS:
2338A (Ivory)
2338A-WH (White)

For hanging fixtures, smoke/fire alarms and other security devices with 3 1/2" [89mm] or 4 1/16" [103mm] mounting centers. Has 1/2" trade size KO. Not for use with fans.


Round Box Extension



PART NUMBERS:
2337A (Ivory)
2337A-WH (White)

For hanging fixtures, smoke/fire alarms and other security devices with 3 1/2" [89mm] or 4 1/16" [103mm] mounting centers. 5 1/2" [140mm] diameter with open base. Not for use with fans.

Extra Deep Device Box



PART NUMBERS:
2344 (Ivory), **2344-WH** (White)
2344-2 (Ivory), **2344-2-WH** (White)

2344 one-gang, 2344-2 two-gang. Two-gang base has rectangular KO to enable extension from existing single-gang flush wallbox and 1/2" and 1" trade size concentric KOs. Accepts industry standard faceplates for switch and communication devices.

CAT. NO.	L	W	GANG
2344	4 3/4" [121mm]	3" [76mm]	1
2344-WH	4 3/4" [121mm]	3" [76mm]	1
2344-2	4 3/4" [121mm]	4 7/8" [124mm]	2
2344-2-WH	4 3/4" [121mm]	4 7/8" [124mm]	2