400, 800, 2300 & 2300D SERIES[™] RACEWAYS Two-Piece, Single- and Dual-Channel, Low Profile




Two-piece, single- and dual-channel, low profile raceway. Easy-toinstall and ideal for power or communication installations.

CODE REFERENCE

cULus Listed Raceway: File E90378 Guide RJTX. Complies with flammability requirements of UL-5A.

Fittings: File E90377 Guide RJYT. Meets Article 388 of NEC. UL Listed for up to 600V. Meets Section 12-1600 of CEC.

400, 800, 2300 & 2300D Series Raceways System Layout

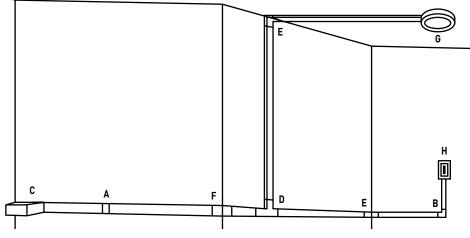

NOTE: Illustration is for showing product applications only.

KEY

- **A.** 406, 806, 2306 Cover Clip **B.** 411, 811, 2311, 2311DFO Flat Elbow Fitting
- **C.** 810A2, 2310A, 2310DFO Entrance End Fitting
- **D.** 415, 815, 2315 Tee

- E. 417, 817, 2317, 2317DFO Internal Elbow
- F. 418, 818, 2318, 2318DFO External Elbow
- G. 2337A, 2338A Round Device Boxes
- H. 2344, 2347, 2348 Sure-Snap Device Boxes

COLOR OPTIONS


400, 800, 2300 Series Raceway Part Numbers with a "-WH" suffix have a white finish. Part Numbers without a suffix have an ivory finish. 400, 800, 2300 Series Raceways are paintable using latex paint.

Custom color options are also available. Consult the factory for more information.

400, 800, 2300 & 2300D SERIES[™] RACEWAYS Ordering Information

400/800/2300/2300D Series Raceway Device Box Ordering Information (continued)

Device Box




PART NUMBERS: 2347 (Ivory) 2347-WH (White) 2347-2 (Ivory) 2347-2-WH (White)

2347 one-gang, 2347-2 two-gang. For standard switches and devices. 2347 Base has rectangular KO. 2347-2 Base has rectangular KO to enable extension from existing flush wall box and 1/2" and 1" concentric KOs. Accepts industry standard faceplates for switch and communication devices.

CAT. NO.	L	W	GANG
2347	4 3/4" [121mm]	3" [76mm]	1
2347-WH	4 3/4" [121mm]	3" [76mm]	1
2347-2	4 3/4" [121mm]	4 7/8 [124mm]	2
2347-2-WH	4 3/4" [121mm]	4 7/8 [124mm]	2

Deep Device Box




PART NUMBERS:
2348 (Ivory)
2348-WH (White)
2348-2 (Ivory)
2348-2-WH (White)
2348-3 (Ivory)
2348-3-WH (White)

2348 one-gang, 2348-2 two-gang, 2348-3 three-gang. For deeper switches and devices. 2348 Base has rectangular KO. 2348-2 and 2348-3 Bases have rectangular KO to enable extension from existing flush wall box and 1/2" and 1" concentric KOs. Accepts industry standard faceplates for switch and communication devices.

CAT. NO.	L	W	GANG
2348	4 3/4" [121mm]	3" [76mm]	1
2348-WH	4 3/4" [121mm]	3" [76mm]	1
2348-2	4 3/4" [121mm]	4 7/8" [124mm]	2
2348-2-WH	4 3/4" [121mm]	4 7/8" [124mm]	2
2348-3	4 3/4" [121mm]	7" [178mm]	3
2348-3-WH	4 3/4" [121mm]	7" [178mm]	3


Shallow Device Box/Extension Box



PART NUMBERS: 2348S/51 (Ivory) 2348S/51-WH (White)

For shallow switches and receptacles. Base has rectangular KO.


Magnetic Deep Device Box (with Grommet)



PART NUMBERS: 2348AMP (Ivory) 2348AMP-WH (White)

For deeper switches and devices, and has magnetic backing. Base has rectangular KO.


Device Box



PART NUMBERS: 2348D (Ivory) 2348D-WH (White)


For use with 2300D Series Divided Raceway. For mounting standard switches, receptacles, and industry standard faceplates for communication devices.

Extra Deep Device Box



PART NUMBERS: 2344D (Ivory), 2344D-WH (White)

For use with 2300D Series Divided Raceway when additional depth is required. For mounting standard switches, receptacles and industry standard faceplates for communication devices.



Two-Gang Deep Divided Device Box

PART NUMBERS: 2344SD-2A (Ivory) 2344SD-2A-WH (White)

Divided two-gang box for use with 2300D Series Divided Raceway. Provides the ability to have both power and low voltage at a single point of use. Utilizes 5507 Series™ faceplates, as well as Wiremold Open System communication modules, Ortronics® TracJack, Series II, and Pass & Seymour® Activate Series inserts. For faceplate options, see 5507 Series™ Faceplates.

NOTE: CM-EPLA End Plates are required when using Wiremold CM2 communication modules and Pass & Seymour® Activate inserts. S2-EPL End Plates are required when using Ortronics® Series II inserts. To mount TracJack modules, use 55074TJ or 55076TJ Faceplates.