

POWER COMMANDER® SERIES

High Amperage Units



Power Commander® Series High Amperage Units (PDUs) have multiple circuits to provide increased capacity for today's high density server racks. Embedded or remote ammeters are available to monitor current draw.

CODE REFERENCE


cULus Listed:
File 173292 Guide: NWGQ

NOTE: We are continually upgrading circuitry and features to provide the best possible power distribution solutions; therefore, the products in this section of the catalog may change without notice. Contact the factory for additional information.

Power Commander Series Mounting Information

MOUNTING ACCESSORIES

Understanding that each cabinet, enclosure, rack and application is unique, Wiremold has designed four solutions for mounting the 30 Amp Power Distribution Units using the universal T-slot built into the unit. The mounting kits listed below are available for purchase as accessories.

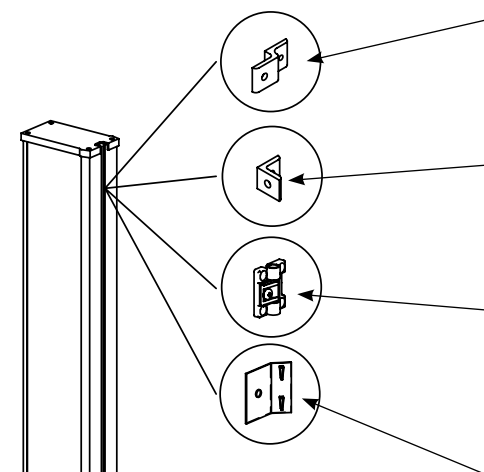

30A-MK1 Z Bracket

Sturdy anodized aluminum bracket offsets the unit for front access to the mounting. May be used for a side or end mount.

30A-MK2 L Bracket

Allows mounting at a right angle. May be used for a side or end mount.

30A-MK3 Swivel Bracket

Allows unit to be mounted then rotated up to 270° (dependent on mounting location) providing easy access to unit's face without losing space.


30A-MK4 Drop-In Clip

Clip is mounted directly on the unit and allows the strip to install with a 'drop and hold' method that requires no additional hardware.

NOTE: Accessory mounting kits are not UL Listed.

STANDARD HARDWARE INSTALLATION

Attach the Spring Clips to the cabinet frame or cabinet wall making sure the top clip is no more than 1 inch [25mm] from the top of the unit. Insert the 1/4 - 20 Phillips screw through the spring clip as shown, and then through the cabinet frame or cabinet wall. On the other side of the mounting surface, put the 1/4 lock washer over the exposed Phillips screw and tighten into place with the 1/4 - 20 nut. Once the spring clips are secure, place unit in one side of the clips and snap the other side into position.

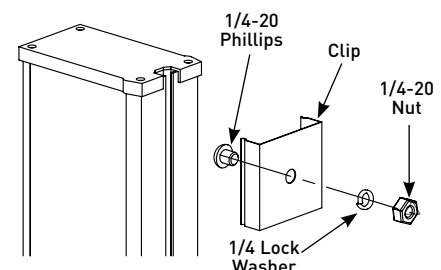


WORKSTATION POWER SOLUTIONS

Ordering Information

Work Station Power Solutions – Power Only Plug-In Outlet Center Units Ordering Information (continued)

Plug-In Outlet Center Units




PART NUMBERS:

UL205BC (6 Foot Cord)
UL205BD (15 Foot Cord)

Eight outlets, rugged gray aluminum housing, 15A. 6' [1.8m] (UL205BC) or 15' [4.6m] (UL205BD) 14/3 SJT black cord with NEMA5-15 plug. Length 13" [330mm]. Receptacle center-to-center 1 1/4" [32mm]. Snap-on, slide-off mounting.

Plug-In Outlet Center Units




PART NUMBERS:

UL210BC (6 Foot Cord)
UL210BD (15 Foot Cord)

Ten outlets, rugged gray aluminum housing, 15A, lighted switch. 6' [1.8m] (UL210BC) or 15' [4.6m] (UL210BD) 14/3 SJT black cord with NEMA5-15 plug. Length 13" [330mm], width 3 1/2" [89mm]. Receptacle center-to-center 1 15/16" [49mm]. Keyhole mounting.

Plug-In Outlet Center Units




PART NUMBERS:

UL206BC (6 Foot Cord)
UL206BD (15 Foot Cord)

Six outlets, rugged gray aluminum housing, 15A. 6' [1.8m] (UL206BC) or 15' [4.6m] (UL206BD) 14/3 SJT black cord with NEMA5-15 plug. Length 12 1/4" [311mm]. Receptacle center-to-center 1 1/4" [32mm]. Snap-on, slide-off mounting.

Plug-In Outlet Center Units




PART NUMBERS:

R610 (6 Foot Cord)
R612 (15 Foot Cord)

Six outlets, putty white aluminum housing, 15A, lighted switch. 6' [1.8m] (R610) or 15' [4.6m] (R612) 14/3 SJT putty white cord with NEMA5-15 plug. Length 12 1/4" [311mm]. Receptacle center-to-center 1 1/4" [32mm]. Snap-on, slide-off mounting.

Plug-In Outlet Center Units




PART NUMBERS:

UL207BC (6 Foot Cord)
UL207BD (15 Foot Cord)

Six outlets, rugged gray aluminum housing, 15A, lighted switch. 6' [1.8m] (UL207BC) or 15' [4.6m] (UL207BD) 14/3 SJT black cord with NEMA5-15 plug. Length 12 1/4" [311mm]. Receptacle center-to-center 1 1/4" [32mm]. Snap-on, slide-off mounting.

Plug-In Outlet Center Units




PART NUMBERS:

P6 (6 Foot Cord)
P6-15 (15 Foot Cord)

Six outlets, putty white impact-resistant polymeric housing, 15A, lighted switch, 6' [1.8m] (P6) or 15' [4.6m] (P6-15) 14/3 SJT putty white cord with NEMA5-15 plug. Length 12" [305mm]. Receptacle center-to-center 1 1/4" [32mm]. Keyhole mounting.

Plug-In Outlet Center Units




PART NUMBERS:

UL218BC (6 Foot Cord)
UL218BD (15 Foot Cord)

Eight outlets, rugged gray aluminum housing, 15A, lighted switch. 6' [1.8m] (UL218BC) or 15' [4.6m] (UL218BD) 14/3 SJT black cord with NEMA5-15 plug. Length 15" [381mm]. Receptacle center-to-center 1 1/4" [32mm]. Snap-on, slide-off mounting.

Plug-In Outlet Center Units



PART NUMBERS:

UL1090BC (6 Foot Cord)
UL1090BD (15 Foot Cord)

Four outlets, rugged gray aluminum housing, 15A, receptacles rotated 90° and spaced to accommodate transformers. 6' [1.8m] (UL1090BC) or 15' [4.6m] (UL1090BD) 14/3 SJT black cord with NEMA5-15 plug. Length 16" [406mm]. Receptacle center-to-center 3" [76mm]. Snap-on, slide-off mounting.