

WORKSTATION POWER SOLUTIONS

Ordering Information

Work Station Power Solutions – Power Only Plug-In Outlet Center Units Ordering Information (continued)

Plug-In Outlet Center Unit




PART NUMBERS:

V20-C2 (6 Foot Cord)

G20-C2 (15 Foot Cord)


Six outlets, steel housing with ivory (V20-C2) or gray finish (G20-C2). 6' [1.8m] cord. Length 40" [1m]. Receptacle center-to-center 6" [152mm].

NM20-C3 Plug-In Outlet Center Units



Six (3 duplex) outlets, nonmetallic housing with ivory finish. 6' [1.8m] cord, Length 36" [915mm]. Receptacle center-to-center 12" [305mm].

NM20-C4 Plug-In Outlet Center Units



Eight (4 duplex) outlets, nonmetallic housing with ivory finish. 6' [1.8m] cord. Length 48" [1.2m]. Receptacle center-to-center 12" [305mm].

NM20-C5 Plug-In Outlet Center Units




Ten (5 duplex) outlets, nonmetallic housing with ivory finish. 6' [1.8m] cord, Length 60" [1.5m]. Receptacle center-to-center 12" [305mm].

NM20-C6 Plug-In Outlet Center Units



Twelve (6 duplex) outlets, nonmetallic housing with ivory finish. 6' [1.8m] cord. Length 72" [1.8m]. Receptacle center-to-center 12" [305mm].

Plug-In Outlet Center Units




PART NUMBERS:

UL100BC (6 Foot Cord)

UL100BD (15 Foot Cord)

Five outlets, rugged gray aluminum housing, 15A. 6' [1.8m] (UL100BC) or 15' [4.6m] (UL100BD) 14/3 SJT black cord with NEMA5-15 plug. Length 9 1/4" [235mm]. Receptacle center-to-center 1 1/4" [32mm]. Snap-on, slide-off mounting.

Plug-In Outlet Center Units




PART NUMBERS:

UL101BC (6 Foot Cord)

UL101BD (15 Foot Cord)

Four outlets, rugged gray aluminum housing, 15A. 6' (UL101BC) or 15' (UL101BD) [1.8m or 4.6m] 14/3 SJT black cord with NEMA5-15 plug. Length 9 1/4" [235mm]. Receptacle center-to-center 1 1/4" [32mm]. Snap-on, slide-off mounting.

Plug-In Outlet Center Units




PART NUMBERS:

UL104BC (6 Foot Cord)

UL104BD (15 Foot Cord)

Four outlets, rugged gray aluminum housing, 15A, lighted switch. 6' [1.8m] (UL104BC) or 15' [4.6m] (UL104BD) 14/3 SJT black cord with NEMA5-15 plug. Length 9 1/4" [235mm]. Receptacle center-to-center 1 1/4" [32mm]. Snap-on, slide-off mounting.

Plug-In Outlet Center Units



PART NUMBERS:

UL204BC (6 Foot Cord)

UL204BD (15 Foot Cord)

Seven outlets, rugged gray aluminum housing, 15A, lighted switch. 6' [1.8m] (UL204BC) or 15' [4.6m] (UL204BD) 14/3 SJT black cord with NEMA5-15 plug. Length 13" [330mm]. Receptacle center-to-center 1 1/4" [32mm]. Snap-on, slide-off mounting.

WORKSTATION SURGE SOLUTIONS



Work Station Power Solutions are point-of-use, plug-in outlet centers available with and without surge suppression.

CODE REFERENCE

cULus Listed: File E66421
Guide XYBS, XUHT, VZCA

Surge Suppression Specifications

Sentrex® High Performance Surge Specifications

Surge Protection Circuitry	3 Element, 3-Stage Hybrid Circuit
Maximum Surge Current	56,000 Amps (32,000 Amps L-N, 12,000 Amps L-G, 12,000 Amps N-G)
Noise Reduction	+50dB
Response Time	Less than 1 nanosecond

NOTE: See the Joule explanation located on the Cabinet Power Solutions page 626.

Perma-Power® Computer Grade Surge Specifications

Surge Protection Circuitry	Single Stage
Maximum Surge Current	36,000 Amps (12,000 Amps L-N, 12,000 Amps L-G, 12,000 Amps N-G)
Noise Reduction	+35dB
Response Time	Less than 1 nanosecond


Mounting Information

MOUNTING TYPES

Each Plug-In Outlet Center unit has one of three different mounting types. Each mounting method has been designed to optimize the performance of the product. Complete mounting hardware and installation instructions are included with every unit.


Snap-On/Slide-Off

Mount unit in any position. Catalog No. 8004 includes two aluminum mounting clips that snap onto mounting rails on the back of the unit. Screws also included. Used for all units with 2" [51mm] aluminum housing.




Keyhole Mounting

Mount unit in almost any position. Screws not included. Available on all plastic units and units with 3 1/2" [89mm] aluminum housing.



Spring Clip Mounting

Mount unit in any position. Catalog No. 8002 includes two spring steel mounting clips that snap onto the unit. Screws also included. Used for all units with 1 1/2" [38mm] narrow aluminum housing.

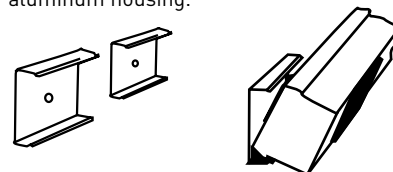

COLOR OPTIONS



Workstation Power Solutions Plug-In Outlet Center Units Part Number descriptions indicate available color options.