
### **D**legrand<sup>®</sup>

## 500<sup>®</sup> & 700<sup>®</sup> SERIES RACEWAY


### 500 & 700 Series Raceways Device Boxes Ordering Information (continued)

#### **Deep Flush Type Extension Adapter**



PART NUMBERS: V5751A (Ivory) 5751AWH (White)


For deep extensions from existing wall boxes.




PART NUMBERS: V5752 (Ivory) R5752 (Red)

For surface mounting of alarm devices and safety signals designed to fit into 4" [102mm] square back boxes. Cover has three raceway twistouts on each side. Base has 1/2" and 1" concentric and singlegang box KOs.

#### CM-MMB-571 One Insert Multimedia Box Two-Gang Extra Deep Alarm Device Box



Accepts one CM2 Wiremold Open System Communications Module or one Pass & Seymour® Activate Series Insert. Compatible with 500 and 700 Series Raceway. lvory finish.



PART NUMBERS: V5753 (Ivorv) R5753 (Red)

For surface mounting of alarm devices and safety signals designed to fit into 4" [102mm] square back boxes. Cover is 2 3/4" [70mm] deep and has three twistouts for raceways on each side. Base has 1/2" and 1" concentric and single-gang box KOs.

NOTE: One-gang device boxes accept NEMA single-gang standard faceplates. Two-gang device boxes accept NEMA double-gang standard faceplates.

### 500 & 700 Series Raceways Tools

#### 600B Wiremold Bender



For making smooth, accurate bends, saddles and offsets in Wiremold 500 and 700 Series Raceways. Two-piece handle fits in tool box.



PART NUMBERS: IWE-S (Ivory) WHWE-S (White)

PART NUMBERS:

IWE-P (Ivorv)

WWE-P (White)

Used for touching up large areas. Contains 12 oz. of paint.

NOTE: Can only be shipped via ground transportation.

#### Touch-Up Paint Pen



615 Wire Pulley

For fishing wires around inside corners of 500 or 700 Series Raceway. When conductors are through the run, detach pulley and snap on appropriate internal elbow cover.

One 616 Fish Tape Leader included.

#### 616 Fish Tape Leader



For pulling conductors through 500 or 700 Series Raceways. Holes provided for up to eight conductors.

Used for touching up small areas. Contains 0.3 oz. of paint.

NOTE: Can only be shipped via ground transportation.

34

## 2000 SERIES® RACEWAY

#### 2000 Series Raceway Ordering Information (continued)

#### **Spray Paint**



PART NUMBERS: IWE-S (Ivory) GWE-S (Gray)

Used for touching up large areas. Contains 12 oz. of paint.


#### **Touch-Up Paint Pen**



PART NUMBERS: IWE-P (Ivory) GWE-P (Gray)

Used for touching up small areas. Contains 0.3 oz. of paint.


#### Single-Gang Device Box



PART NUMBERS: V2048 (Ivory) G2048 (Grav)

Cover has twistouts for 2000, 500, and 700 Series Raceways. Base has 1/2" trade size KO and rectangular KO for extension to wall box. Base has #10 threaded hole for ground connection.


#### **Two-Gang Device Box**



PART NUMBERS: V2048-2 (Ivory) G2048-2 (Gray)


Cover has twistouts for 2000, 500, and 700 Series Raceways. Base has 1/2" trade size KO and rectangular KO for extension to wall box. Base has #10 threaded hole for ground connection.

#### Flush Plate Adapter



#### PART NUMBERS: V2051H (Ivory) G2051H (Gray)

Feeds 2000 Series Raceway from an existing wall outlet. Equipped with 1/2" trade size threaded stud, toothed lock washer for grounding, and conduit bushing.




### 2051H fastened to horizontally mounted wall box.



wall hox

2051H fastened to vertically mounted

#### V2089 Side Reducing Connector



Connects 2000 Series Raceway with 500 Series Raceway through the side of 2000 Series Raceway.

#### V2089E End Reducing Connector



Connects 2000 Series Raceway with 500 Series Raceway through the end of 2000 Series Raceway.


NOTE: Parts identified with this symbol are Certified to Canadian Safety

Standards for sale in Canada. When ordering these products, change the "V" color prefix to "CV" or the "G" color prefix to "CG" to denote the Canadian versions.


# 2400 SERIES<sup>™</sup> RACEWAY

#### 2400 Series Raceway Fittings Ordering Information (continued)

#### V4089 Reducing Connector



Connects 4000 Series Raceway to 2400 Series Raceway.




3-Wire 125V NEMA 5-20R receptacle. Includes 10-1/2" [267mm] pigtails and inline splice connectors. Also available in fog white (2427GT-FW).

#### V2427GA 15A Duplex Receptacle


V2427GT 20A Duplex Receptacle

#### 106 Device Bracket & Frame



PART NUMBERS: V2407-2CM (Ivory) 2407-2CMFW (Fog White)

For installing two network wiring keystone device modules in 2400 Series Raceway. Does not accept Quad 106 Frame.



3-Wire 125V NEMA 5-15R receptacle. Includes 10-1/2" [267mm] pigtails and inline splice connectors. Also available in fog white (2427GA-FW).

#### IG2427GT 20A Isolated Ground Duplex Receptacle



2 1/16" [52mm] **2407-2TJFW** (Fog White) For installing two Ortronics®

2407-3TJFW (Fog White)

Quad 106 Frame.

For installing three Ortronics®

TracJack device modules in 2400


Series Raceway. Does not accept

PART NUMBERS:

V2407-3TJ (Ivory)


V2407-2TJ (Ivory)

TracJack device modules in 2400 Series Raceway. Does not accept Quad 106 Frame.



3-Wire 125V NEMA 5-20R orange receptacle. Includes 10-1/2" [267mm] pigtails and inline splice connectors. Also available in fog white (IG2427GT-FW).

#### IG2427GA 15A Isolated Ground Duplex Receptacle



3-Wire 125V NEMA 5-15R orange receptacle. Includes 10-1/2" [267mm] pigtails and inline splice connectors. Also available in fog white (IG2427GA-FW).

#### Spray Paint



PART NUMBERS: IWE-S (Ivory) DVWE-S (Fog White)

Used for touching up large areas. Contains 12 oz. of paint.

NOTE: Can only be shipped via ground transportation

#### **Touch-Up Paint Pen**



PART NUMBERS: IWE-P (Ivory) DVWE-P (Fog White)

Used for touching up small areas. Contains 0.3 oz. of paint.

45

# 2400D SERIES<sup>™</sup> RACEWAY

#### 2400D Series Raceway Wire Fill Capacities for Communications 2400D Series Raceway Wire Fill Capacities for Power

|                            | CABLE/                     | 0.D.<br>(APPROX. DIA.) |         | 1/3 COMP | 2/3 COMP |
|----------------------------|----------------------------|------------------------|---------|----------|----------|
|                            | WIRE SIZE                  | Inches                 | [mm]    | 40% FILL |          |
| UNSHIELDED<br>TWISTED PAIR | 4-pair, 24 AWG,<br>Cat 3   | 0.190                  | [4.8]   | 5        | 12       |
|                            | 4-pair, 24 AWG,<br>Cat 5e  | 0.210                  | [5.3]   | 4        | 9        |
|                            | 4-pair,24 AWG,<br>Cat 6    | 0.250                  | [6.3]   | 3        | 7        |
|                            | 4-pair, 24 AWG,<br>Cat 6a* | 0.354                  | [9.0]   | 1        | 3        |
|                            | 25-pair, 24 AWG            | 0.410                  | [10.4]  | 1        | 2        |
| COAXIAL                    | RG6/U                      | 0.270                  | [6.9]   | 2        | 6        |
| Fiber                      | ZipCord                    | 0.118 x<br>0.236       | [3 x 6] | 5        | 12       |
|                            | Round 4 Strand<br>Fiber    | 0.187                  | [4.8]   | 5        | 12       |
|                            | Round 6 Strand<br>Fiber    | 0.256                  | [6.5]   | 2        | 6        |

### 2400D Series Raceway Ordering Information

#### **Divided Raceway Base**



#### PART NUMBERS: V2400BD (Ivory) 2400BD-FW (Fog White)

.040" [1.0mm] steel. Divided into two compartments (1/3 and 2/3 capacity). Packed ten 10 [3.0m] lengths per carton.

#### **Raceway Cover**



V2400C (Ivory) 2400C-FW (Fog White)

.040" [1.0mm] steel. Packed twenty 5' [1.5m] lengths per carton.

#### 624 2400 Series Raceway Base & Cover Cutter

PART NUMBERS:



Portable cutter for 2400 & 2400D Series Raceway Base and Cover. Provides a clean and easy, square cut every time.

#### 2400D Series Raceway Fittings Ordering Information

#### 2400WC Wire Clip



Additional support for conductors (nonmetallic).

| WIRE SIZE | 0.D.   |       | NUMBER OF CONDUCTORS<br>(40%) |          |  |
|-----------|--------|-------|-------------------------------|----------|--|
| THHN/THWN | Inches | [mm]  | 1/3 COMP                      | 2/3 COMP |  |
| 14 AWG    | 0.111  | [2.8] | 11                            | 26       |  |
| 12 AWG    | 0.130  | [3.3] | 9                             | 19       |  |
| 10 AWG    | 0.164  | [4.2] | 6                             | 11       |  |

NOTE: For additional information, refer to the Technical Section.

\* Category 6 augmented (6a) cable for 10 gigabit ethernet – max allowed cable diameter per addenda No. 11 ANSI TIA/EIA 568-B.2.

#### 624BCK Replacement Blade Kit

Case hard steel replacement blades and die set for 624 Cutter.



PART NUMBERS: IWE-S (Ivory) DVWE-S (Fog White)

Used for touching up large areas. Contains 12 oz. of paint.

NOTE: Can only be shipped via ground transportation


#### **Touch-Up Paint Pen**



PART NUMBERS: IWE-P (Ivory) DVWE-P (Fog White)

Used for touching up small areas. Contains 0.3 oz. of paint.


#### 2401D Divided Coupling



Joins lengths of 2400BD Divided Base.

### 2400D SERIES<sup>™</sup> RACEWAY

### 2400D Series Raceway Fittings Ordering Information (continued)

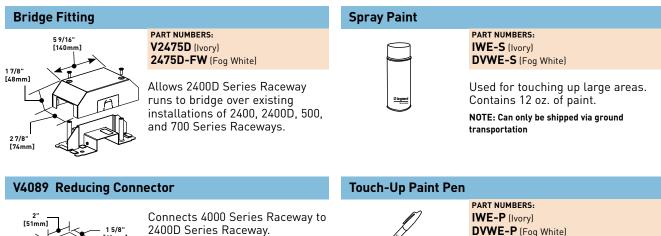

[41mm] 4 3/4" [121mm]

2400D Series Raceway.



Used for touching up small areas. Contains 0.3 oz. of paint.

#### **5507 Series Faceplates Ordering Information**

#### **Modular Furniture Adapter**



PART NUMBERS: 5507AD (Ivorv) 5507AD-FW (Fog White)

Covers Activate modular furniture adapter and other modular furniture adapters. Not for use with decorator (rectangular) style devices.

**Rectangular Faceplate** 

PART NUMBERS: 5507R (Ivory) 5507R-FW (Fog White)

Covers rectangular decorator style devices.

#### **Blank Faceplate**



PART NUMBERS: 5507B (Ivory) 5507B-FW (Fog White)

Covers unused compartments in the device bracket.

#### Switch Faceplate



PART NUMBERS: 5507SW (Ivory) 5507SW-FW (Fog White)

Covers standard toggle switches.

#### **Duplex Faceplate**



PART NUMBERS: 5507D (Ivory) 5507D-FW (Fog White)

Covers duplex style devices including 106 Frame.

#### Single Receptacle Faceplate



PART NUMBERS: 5507T1 (Ivory) 5507T1-FW (Fog White)

Covers single receptacles 1.59" [40.4mm] diameter.

## 3000 SERIES® RACEWAY

#### 3000 Series Raceway Ordering Information (continued)


#### Flat Elbow Fitting



PART NUMBERS: V3011E (Ivory) G3011E (Gray)

Right angle turns on the same surface.

#### Wall Box Connector




#### PART NUMBERS: V3014C (Ivory) G3014C (Gray)

Connects 3000 Series Raceway from flushed-in wall box.

#### **Touch-Up Paint Pen** PART NUMBERS: IWE-P (Ivory) GWE-P (Gray) Used for touching up small areas. Contains 0.3 oz. of paint. External Corner Coupling PART NUMBERS: 1 1/4" -[32mm] V3018AE (Ivory) G3018AE (Gray) Right angle turns around external corners Use with G3017TCE to offset around columns etc. (mini m 4" [102mm] offset). 4" [102mm]

#### Single Receptacle Cover




**G3027AE** (Gray) Installs commercially available straight blade and locking single

receptacles with face diameters of 1.38"-1.40" [35mm-36mm] into 3000 Series Raceway. G3007C Device Bracket included.

PART NUMBERS:

V3027AE (Ivory)

#### Utility Box



PART NUMBERS: V3028 (Ivory) G3028 (Gray)

Used as a tee, cross, junction box, or for branch circuit extensions in 3000 Series Raceway. Cover has raceway twistouts on all sides. Base has five

1/2" trade size KOs and four fixture mounting holes.

#### Single Receptacle Cover 4 1/2" 114mm] 1.58" PART NUMBERS: V3033JE (Ivory) G3033JE (Gray) Installs commercially available particular to back and backing a right

Installs commercially available straight blade and locking single receptacles with face diameters of taly [40mm]] into 3000 Series

1.56"-1.57" (approximately [40mm]) into 3000 Series Raceway. G3007C Device Bracket included.

#### **Blank Cover**

Dia



PART NUMBERS: V3036HE (Ivory) G3036HE (Gray)

Use as a blank cover or tap off K0 in center of plate for 1/2" trade size conduit. G3007C Device Bracket included.

55

# [203mm]

**Tee Fitting** 


#### PART NUMBERS: V3015E (Ivory)

**G3015E** (Gray)

For branching raceway at right angles. Three couplings included.

#### Internal Corner Coupling PART NUMBERS:

10 1/4" [260mm]



V3017TCE (Ivory) G3017TCE (Gray)

For surfaces at right angles, or for use as a straight-through fitting. Solid leg of base has concentric 1/2" and 3/4" trade size KOs.

 #6 AWG
 #8 AWG
 #10 AWG
 #12 AWG
 #14 AWG

 THHN, THWN
 13
 18
 24
 55
 75

PART NUMBERS:

**Spray Paint** 



IWE-S (Ivory) GWE-S (Gray) Used for touching up large areas. Contains 12 oz. of paint.

NOTE: Can only be shipped via ground transportation

NOTE: Parts identified with this symbol are Certified to Canadian Safety Standards for sale in Canada. When ordering these products, change the "V" color prefix to "CV" or the "G" color prefix to "CG" to denote the Canadian versions.

### 4000® SERIES RACEWAY

#### 4000 Series Raceway Ordering Information (continued)

#### **Spray Paint**



PART NUMBERS: IWE-S (Ivory) GWE-S (Gray)

Used for touching up large areas. Contains 12 oz. of paint.

NOTE: Can only be shipped via ground transportation.


### Touch-Up Paint Pen



PART NUMBERS: IWE-P (Ivory) GWE-P (Gray)

Used for touching up small areas. Contains 0.3 oz. of paint.


### **4047 Series Faceplates Ordering Information**

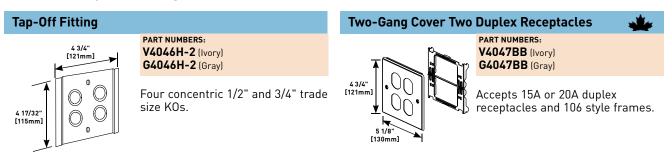

100

<u>مالاد</u>


Two-Gang Cover Single Round Opening



PART NUMBERS: V4047AX (Ivory) G4047AX (Gray)


Accepts straight blade and locking single receptacles with face diameters of 1.38" to 1.39" [35mm to 36mm].

Two-Gang Cover One Duplex Receptacle






Accepts 15A or 20A duplex receptacles and 106 style frames when used for communications outlets. Two-Gang Cover Duplex & Modular Furniture



PART NUMBERS: V4047BF (Ivory) G4047BF (Gray)

Accepts 15A or 20A duplex receptacles. Includes combination twistout that can accept either one Modular Furniture adapter, 106 style frame, or two Keystone RJ45s.

#### Two-Gang Cover & Pass & Seymour® Activate 2A Mini Adapter



PART NUMBERS: V4047BM (Ivory) G4047BM (Gray)


Accepts15A or 20A duplex receptacles and 106 style frames. Includes Mini adapter that will accept Activate Series inserts and Wiremold Open System communication modules.

STEEL RACEWAY

- NOTE: Parts identified with this symbol are Certified to Canadian Safety Standards for sale in Canada. When ordering these products, cha
  - Standards for sale in Canada. When ordering these products, change the "V" color prefix to "CV" or the "G" color prefix to "CG" to denote the Canadian versions.
- NOTE: All 4047 Series Faceplates provide 1/4" [6.4mm] of overlap on each side of plate.

## 6000® SERIES RACEWAY

#### 6000 Series Raceway Ordering Information (continued)

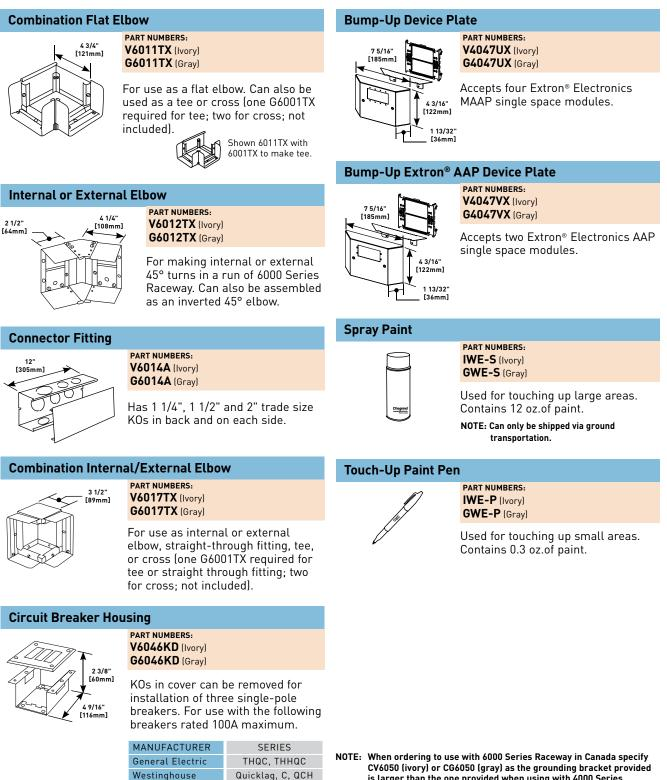

is larger than the one provided when using with 4000 Series Raceway. CM-EPLA End Plates are required when using Wiremold

CM2 communication modules and Pass & Seymour® Activate inserts. S2-EPL End Plates are required when using Ortronics® Series

II inserts. To mount TracJack modules, use 55074TJ or 55076TJ

Faceplates.

NOTE: Parts identified with this symbol are Certified to Canadian Safety Standards for sale in Canada. When ordering these products, change the "V" color prefix to "CV" or the "G" color prefix to "CG" to denote the Canadian versions.

STEEL RACEWAY