

# 2000 SERIES® RACEWAY




Two-piece, single-channel raceway. Easy-to-install and ideal for basic power or communication/low voltage installations

## CODE REFERENCE

**cULus Listed Raceway:**  
File E4376 Guide RJBT.

**Fittings:**  
File E41751 Guide RJPR.  
Meets Article 386 of NEC.  
Meets Section 12-1600 of CEC.

## System Layout

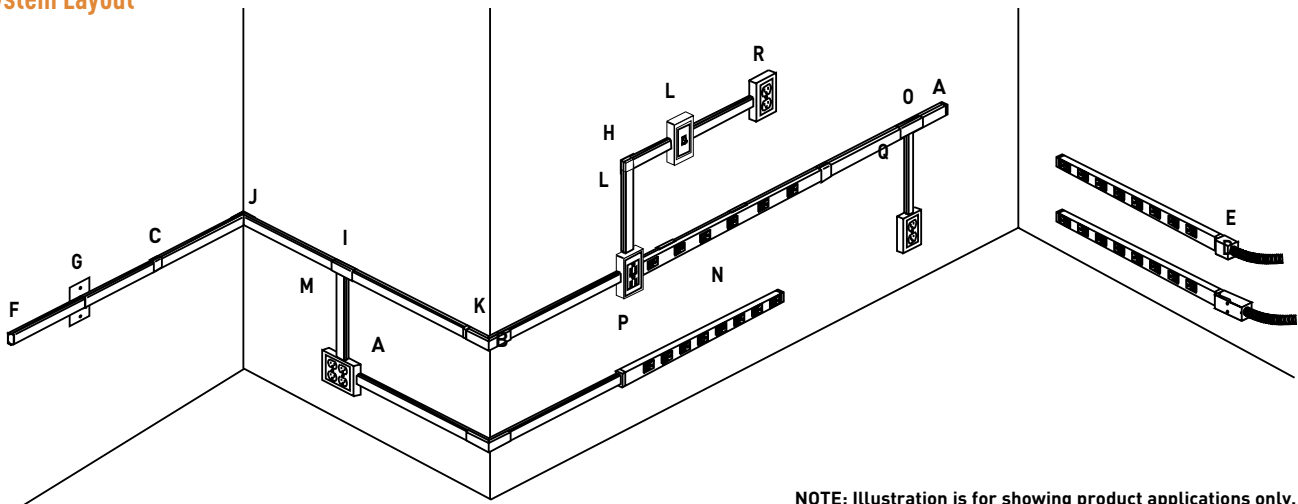

**NOTE:** Illustration is for showing product applications only.

## KEY

- |                                |                                    |                                 |
|--------------------------------|------------------------------------|---------------------------------|
| A. 500 Series Raceway          | G. 2051H Flush Plate Adapter       | M. 2048-2 Two-Gang Device Box   |
| B. 518 External Elbow Fitting  | H. 2011 90° Flat Elbow Fitting     | N. 20GB506 Plugmold Strip       |
| C. 2006 Cover Clip             | I. 2015 Tee Fitting                | O. 2089A Flush Plate Adapter    |
| D. 2010A3 Entrance End Fitting | J. 2017TC Internal Corner Coupling | P. 2089E End-Reducing Connector |
| E. 2010A2 Entrance End Fitting | K. 2018C External Elbow Cover      | Q. 5748 Single-Gang Device Box  |
| F. 2010B Blank End Fitting     | L. 2048 Single-Gang Device Box     |                                 |

## COLOR OPTIONS



2000® Series Raceway Part Numbers with a "V" prefix have an ivory finish. Part Numbers with a "G" prefix have a gray finish. Part Numbers without a prefix or suffix have a protective zinc finish.


**Custom color options are also available. Consult the factory for more information.**

# 2000 SERIES® RACEWAY

## 2000 Series Raceway Interconnectivity Fittings

CONNECTION REQUIRED		USE CATALOG NUMBER
FROM	TO	
500 Series Raceway	Side of 2000 Series Raceway	V2089, V2048, V2048-2
500 Series Raceway	End of 2000 Series Raceway	V2089E, V2048, V2048-2
Existing Outlet	2000 Series Raceway	V2051H
1/2" trade size Conduit or Armored Cable	2000 Series Raceway	V2010A2, V2010A3

### Blank End Fitting




**PART NUMBERS:**  
**V2010B** (Ivory)  
**G2010B** (Gray)

Closes off the open end of 2000 Series Raceway.

## 2000 Series Raceway Ordering Information (continued)


### Cover Clip



**PART NUMBERS:**  
**V2006** (Ivory)  
**G2006** (Gray)

Covers seam where two lengths of 2000 Series Raceway come together.


### Flat Elbow Fitting



**PART NUMBERS:**  
**V2011** (Ivory)  
**G2011** (Gray)


For right angle turns on same surface. Cover stop permits neat butting of 2000C Cover. Two couplings included.

### 2009 Ground Clamp




How 2009 is used.

Connects equipment grounding conductor. Provides an additional ground for raceway.




### Tee Fitting



**PART NUMBERS:**  
**V2015** (Ivory)  
**G2015** (Gray)

For branching raceway at right angles. Three couplings included.


### Entrance End Fitting





**PART NUMBERS:**  
**V2010A2** (Ivory)  
**G2010A2** (Gray)

Connects 2000 Series Raceway to 1/2" trade size conduit or armored cable connectors. 1/2" trade size KO's located on end, sides, and bottom of fitting. Includes ground screw. If more capacity is required, use 2010A3.

### 2017TC Internal Corner Coupling




Can be used as inside corner coupling or as coupling and straight thru fitting. Furnished with one fiber bushing.



2017TC used as a corner coupling.

2017TC used as a corner coupling and a straight-through fitting.


### Entrance End Fitting



**PART NUMBERS:**  
**V2010A3** (Ivory)  
**G2010A3** (Gray)


1/2" trade size KO's located on end, sides, and bottom of fitting. 3/4" KO's on bottom and rear. Includes ground screw.

### External Elbow Cover



**PART NUMBERS:**  
**V2018C** (Ivory)  
**G2018C** (Gray)

Covers gap when external corner is made by notching and bending 2000B Base. Continues raceway runs around outside corners.



Corner gap filler snapped into place in 2018C

## PLUGMOLD® 2000 SERIES™



Two-piece, low profile multiple outlet raceway. Low profile requires minimal space.

**CODE REFERENCE**


**cULus Listed Base & Blank Cover:**  
File E4376 Guide RJBT.

**Multi-Outlet Assemblies:**  
File E15191 Guide PVGT.

**Fittings:**  
File E41751 Guide RJPR.

**Base & Blank Cover & Plugmold Series with Snapicoil Harness:**  
Meets Article 386 of NEC.  
Meets Section 12-3032 of CEC.

**Plugmold Wired Sections:**  
Meets Article 380 of NEC.  
Meets Section 12-3032 of CEC.

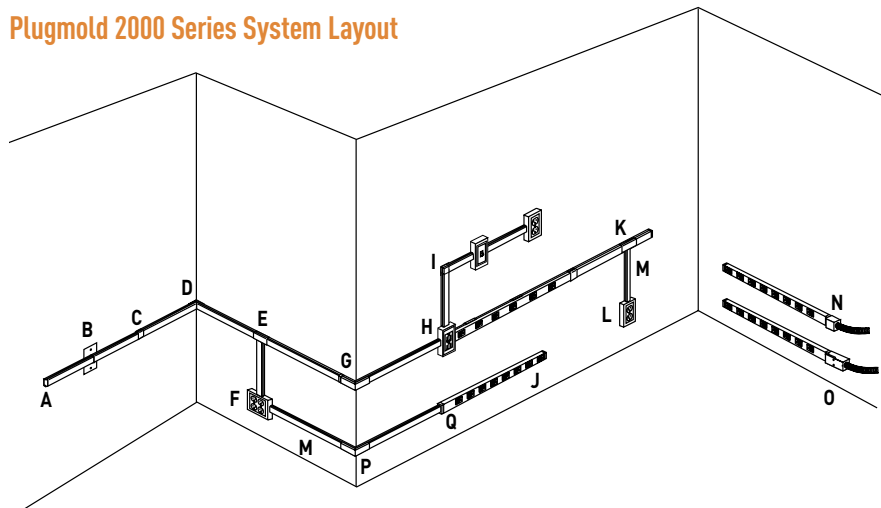**Plugmold 2000 Series System Layout**


**NOTE:** Illustration is for showing product applications only.

**KEY**

- A. V2010B Blank End Fitting
- B. V2051H Flush Plate Adapter
- C. V2006 Cover Clip
- D. 2017TC Internal Corner Coupling
- E. V2015 Tee Fitting
- F. V2048-2 Two-Gang Device Box
- G. V2018C Extern Elbow Cover
- H. V2048 Single-Gang Device Box
- I. V2011 90° Flat Elbow
- J. V20GB506 Plugmold Strip
- K. V2089 Side-Reducing Fitting
- L. V5748 Single-Gang Device Box
- M. V500 500 Series Raceway
- N. V2010A2 Entrance End Fitting
- O. V2010A3 Entrance End Fitting
- P. V518 External Elbow
- Q. V2089E End-Reducing Connector

**COLOR OPTIONS**



Plugmold® 2000 Series™ Part Numbers with a "V" prefix have an ivory finish. Part Numbers with a "G" prefix have a gray finish. Part Numbers with a "S" prefix have a stainless finish. Part Numbers with a "WH" prefix have a white finish. Part Numbers with a "BK" prefix have a black finish. Part Numbers without a prefix have a galvanized steel finish unless otherwise specified.

**Custom color options are also available. Consult the factory for more information.**

# PLUGMOLD® 2000TR SERIES™


## Steel Plugmold 2000TR Series Ordering Information (continued)

### 2001 Coupling




Joins lengths of Plugmold 2000TR Series together.

### V2051H Back Feed Fitting




Feeds Plugmold 2000TR Series from an existing outlet box. Equipped with 1/2" trade size male bushing and lock nut washer for grounding.

### 2009 Ground Clamp




Connects equipment grounding conductor to Plugmold 2000TR Series.



How 2009 is used.


### Entrance End Fitting



**PART NUMBERS:**  
**V2010A2** (Ivory)  
**WH2010A2** (White)  
**G2010A2** (Gray)  
**BK2010A2** (Black)  
**S2010A2** (Stainless Steel)

Connects Plugmold 2000TR Series with 1/2" trade size conduit and armored cable connectors. 1/2" trade size KOs on end, each side and bottom. Includes ground screw.


### Blank End Fitting



**PART NUMBERS:**  
**V2010B** (Ivory)  
**WH2010B** (White)  
**G2010B** (Gray)  
**BK2010B** (Black)  
**S2010B** (Stainless Steel)

Closes off open end of sections of Plugmold 2000TR Series.

### Entrance End Fitting



**PART NUMBERS:**  
**V2040B** (Ivory)  
**WH2040B** (White)  
**G2040B** (Gray)  
**BK2040B** (Black)  
**S2040B** (Stainless Steel)

One-gang device box. Cover has one twistout for 2000 Series Plugmold on two sides and one twistout for 500® and 700® Series Raceway on the top and bottom. Base includes knockout to enable extension from existing single-gang flush wall box and 1/2" trade size KOs. Accepts industry standard faceplates for electrical and communication devices.