

CERTIFIED LEAD FREE - MODELS 800LF - 818LF

800LF Series Deluxe Frost-Proof Yard Hydrant



- 3/4" or 1" NPT Female Inlet
- 3/4" Male Hose Thread Outlet
- Cast Iron Head and Handle with Blue Polyester Powder Coated Finish.
- Max. Pressure 120 PSI
- Many Parts and Accessories are common for all Models.
- Yard hydrant accessories...See page 27.




NSF/ANSI 372

Certified by Truedell Laboratories. Meets all Federal and state Safe Drinking Water Acts and requirements. **Does not meet California Prop. 65 (Environmental Law)**

3/4" Inlet Part No.	1" Inlet Part No.	Bury Depth	Weight Each lbs.
800LF	810LF	1	11.9
801LF	811LF	1 1/2	13.5
802LF	812LF	2	14.5
803LF	813LF	3	16.8
804LF	814LF	4	18.9
805LF	815LF	5	21.2
806LF	816LF	6	23.4
807LF	817LF	7	25.7
808LF	818LF	8	28.2

All Simmons Yard Hydrants are Individually Boxed.

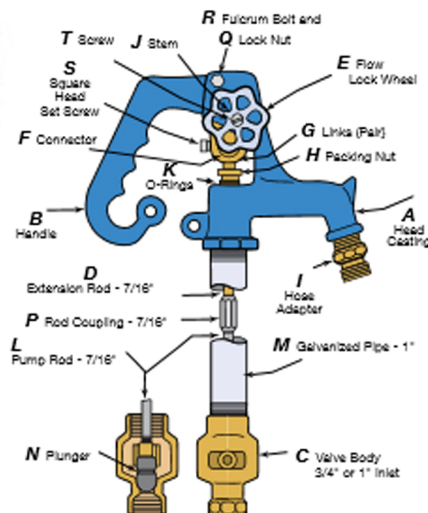

Parts Kit




CERTIFIED LEAD FREE 800LF Series Yard Hydrant Parts

Ref. No.	Name of Part
850SB	Parts Kit
840	Head Complete
8820	Head
B	8821 Handle
C	8822SB Valve Body (3/4") 8832A Valve Body (1")
D	8845 Extension Rod, 7/16"
E	8824* Flow Lock Wheel
F	8825• Brass Connector
G	8826• Brass Links (Price per Pair)
H	8847• Brass Packing Nut
I	8844 Hose Adapter
J	8829* Brass Stem, Square Head
K	8839• Buna-N "O" Rings (Price per Pair)
L	8814 Pump Rod, 7/16"
M	8815 Galvanized Pipe Casing, 1"
N	8842• Plunger (One Piece)
P	8834 Rod Coupling, 7/16"
Q	8301• Stainless Steel Lock Nut
R	8836• Fulcrum Bolt Stainless Steel
S	8837• Square Head Set Screw Stainless
T	8610* Screw for Flow Lock Wheel

*Included in Parts Kit. Refer to Parts Kit photo at left. *These parts make up the flow lock wheel assembly.

Flow Rates:

(For All Simmons Yard Hydrant Models except 6800 Series)

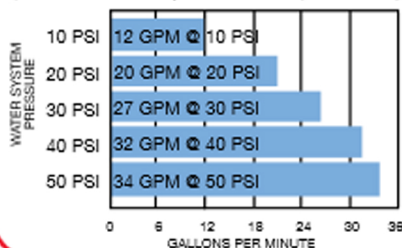

MADE IN U.S.A.