For Residential and Commercial Applications				
Job Name		Engineer / Architect		
Job Location		Wholesaler		
Submittal Date		Contractor		

BRPX04 / BRPX14 / BRPX34 Multi-Turn Straight Stop – Barbed PEX x Compression

Use: For use with water in accessible locations only. Not intended for recirculating water systems that produce continuous use temperatures above 115° F. For those applications, use our KT[™] series ball stop.

Design Features:

- Machined one-piece brass body provides strength, durability, and long-lasting performance
- Knurled oval handle provides a secure grip and smooth on/off operation
- Easy-to-remove handle with screw attachment helps protect against accidental stop operation during rough-ins
- 100% Compliant product available



Operating Specifications:

Temperature: 40°- 140° F **Pressure:** 125 PSI maximum

Standard

STOP MATERIAL SPECIFICATIONS		
Body	Brass or brass, chrome plated	
Stem	Brass or brass, chrome plated	
Bib & Packing Washers	Rubber	
Packing Nut	Brass or brass, chrome plated	
Handle	Zinc, die cast plated; ABS, plated; or Polycarbonate	
Handle Screw	Steel, zinc plated	
Plastic Sleeve	Delrin	
Compression Sleeve	Brass	
Compression Nut	Brass or brass, chrome plated	

Compliant

STOP MATERIAL SPECIFICATIONS		
Body	Compliant brass or Compliant brass, chrome plated	
Stem	Compliant brass or Compliant brass, chrome plated	
Bib & Packing Washers	Rubber	
Packing Nut	Brass or brass, chrome plated	
Handle	Zinc, die cast plated; ABS, plated; or Polycarbonate	
Handle Screw	Steel, zinc plated	
Plastic Sleeve	Delrin	
Compression Sleeve	Brass	
Compression Nut	Brass or brass, chrome plated	

Standard Part Listing:

	BRPX04 C	1/2" nom barb (for PEX) x 1/4" OD compression, chrome plated
	BRPX04 R	1/2" nom barb (for PEX) x 1/4" OD compression, rough brass
	BRPX14 C	1/2" nom barb (for PEX) x 3/8" OD compression, chrome plated
	BRPX14 C1	1/2" nom barb (for PEX) x 3/8" OD compression, chrome plated, window tray
	BRPX14 R	1/2" nom barb (for PEX) x 3/8" OD compression, rough brass
	BRPX34 C	1/2" nom barb (for PEX) x 1/2" OD compression, chrome plated
П	BRPX34 R	1/2" nom barb (for PEX) x 1/2" OD compression, rough brass

This specification and all information contained herein is the confidential and exclusive property of BrassCraft Manufacturing, and shall not be disclosed to others without the written consent of BrassCraft Mfg. This specification must be returned to BrassCraft Mfg if requested.




BRPX04 / BRPX14 / BRPX34 Multi-Turn Straight Stop – Barbed PEX x Compression

Compliant Part Listing:

BRPX04X C	1/2" nom barb (for PEX) x 1/4" OD compression, chrome plated
BRPX04X R	1/2" nom barb (for PEX) x 1/4" OD compression, rough brass
BRPX14X C	1/2" nom barb (for PEX) x 3/8" OD compression, chrome plated
BRPX14X R	1/2" nom barb (for PEX) x 3/8" OD compression, rough brass

PART DIMENSIONS (Inches)				
Model	DIM. A	DIM. B		
BRPX04	1.67	2.19		
BRPX14	1.67	2.19		
BRPX34	1.67	2.28		

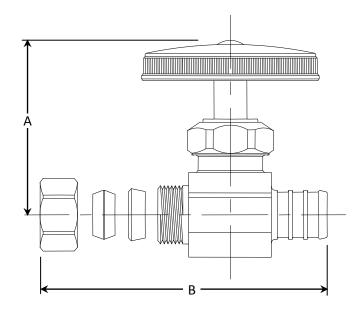

Listings & Certifications:

- IAPMO listed to ASME A112.18.1 / CSA B125.1 (File # 0645)
- CSA listed to ASME A112.18.1 / CSA B125.1 (File # 204593)
- Compliant product CSA listed to Low Lead Content
 Certification Program Plumbing Products Class 6853-01







