

- Convenient patented built-in wire stripper speeds installation
- Steel mounting strap is zinc-plated for added corrosion resistance
- USB Receptacles allow for quick and convenient charging of most electronic components
- Nightlight models feature dimmable LED lamps



## Specific combination device solutions for today's needs




### Light & motor control

Combination switches are horsepower rated to carry motor loads such as bathroom fans and garbage disposals on the same or separate circuits.

See page B-15

Shown:  
7728

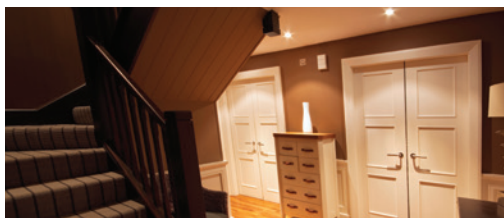

### LED nightlight combinations

Ideal for bathrooms, hallways, stairs and landings, flush-mount LED nightlight combination devices provide added safety and comfort along with switch or receptacle functionality.

See page B-18

Shown:  
TR7735



### USB charging devices

Perfect for quickly and easily charging most electronic components without powered computers or bulky adapters.

See page B-14


Shown:  
TR7740



### Dimmable LED nightlight heavy duty grade combination devices

#### Product description

Single-pole 15A, 120V/AC  
 15A, 125V/AC switches  
 15A, 125V/AC; 20A, 125V/AC receptacles  
 120V nightlight



5-15R

5-20R

#### Design features

- Light sensor turns the nightlight ON when ambient light is low, and OFF when ambient light is high
- Nightlights are dimmable to desired light level
- Long-lasting energy efficient LED bulbs are rated for 50,000 hours lamp life
- Nightlight features full dimming as well as 3 preset levels to easily match light levels on devices mounted in series
- Nightlights use 3 LED lamps that consume a maximum of 1 watt of energy
- Combination nightlight/receptacle (TR7735 & TR7736) features UL Listed Tamper Resistant shutters that prevent the insertion of foreign objects
- Automatic grounding system eliminates the need for bonding jumper in grounded metal enclosure and provides redundant measure of ground continuity where a jumper is used
- Terminal screws are backed out and ready for wiring to enhance ease of installation
- Devices mounted in series can be controlled by an external switch in guide light mode



7738



TR7735



7737

#### LED nightlight combination with switch



A	Rating V/AC	W	Description	Color suffix	Catalog no.
15	120	1	One single-pole switch with nightlight, back & side wire	A, BK, LA, V, W	□ 7738__

cULus Listed to UL20, file no. E18704; NOM certified

#### LED nightlight combination with receptacle



A	Rating V/AC	W	Description	Color suffix	Catalog no.
15	120	1	Nightlight with one tamper resistant NEMA 5-15R 2-pole, 3-wire receptacle, back & side wire	A, BK, LA, V, W	□ TR7735__
20	120	1	Nightlight with one tamper resistant NEMA 5-20R 2-pole, 3-wire receptacle, back & side wire	A, BK, LA, V, W	□ TR7736__

cULus Listed to UL498, file no. E15058; NOM certified

#### Full LED nightlight



V/AC	Rating W	Description	Color suffix	Catalog no.
120	1	Full hallway nightlight, back & side wire	A, BK, LA, V, W	□ 7737__

cULus Listed to UL1598, file no. E334295; NOM certified

#### Color ordering information:

For ordering devices, include Catalog no. followed by the Color suffix: A (Almond), BK (Black), LA (Light Almond), V (Ivory), W (White).



**Dimensional information:** B-68

**Specification information:** Please visit [www.cooperwiringdevices.com](http://www.cooperwiringdevices.com)

**Compliances, specifications and availability are subject to change without notice.**

