

# 320A Continuous Meter Mounting Equipment

## Commercial<sup>①②③</sup> Heavy Duty Lever Bypass

4, 5 and 7 terminal for 1 phase, 3 wire; 3 phase, 3 wire; 3 phase, 4 wire

Cont. amp rating	Connectors line	Connectors load	No. of term.	Dimensions (in.)			Service	Encl. matl.	Hub opening	Catalog number
				W	H	D				
<b>Approved for Allegheny Power</b>										
320	1/2 - 20 Stud	1/2 - 20 Stud	7	20.0	34.0	6.0	OH/UG	Steel	HD Cl. Plate	44707-02
<b>Approved for Delmarva/Atlantic Electric (Pepco/Connectiv)</b>										
320	3/8 - 24 Stud	3/8 - 24 Stud	4	13.0	28.0	5.1	OH/UG	Steel	HD Cl. Plate	47604-02CV
<b>Approved for First Energy</b>										
320	#4 - 600 KCMIL	#4 - 600 KCMIL	4	13.0	28.0	5.1	OH/UG	Steel	HD Opening	47604-81GP
320	#4 - 600 KCMIL	#4 - 600 KCMIL	4	20.0	34.0	6.0	OH/UG	Steel	HD Cl. Plate	48704-82GP <sup>④</sup>
320	#4 - 600 KCMIL	#4 - 600 KCMIL	7	20.0	34.0	6.0	OH/UG	Steel	HD Cl. Plate	48707-82GP <sup>④</sup>
<b>Approved for First Energy and PP&amp;L</b>										
320	3/0 - 800 KCMIL	1/2 - 20 Stud	4	20.0	34.0	6.0	OH/UG	Steel	HD Cl. Plate	44704-82PP
<b>Approved for Orange &amp; Rockland</b>										
320	#4 - 600 KCMIL	#4 - 600 KCMIL	5	16.0	31.0	5.0	OH/UG	Steel	HD Cl. Plate	48105-83BU
<b>Approved for PECO</b>										
320	#4 - 600 KCMIL	#4 - 600 KCMIL	4	20.0	34.0	6.0	OH/UG	Steel	HD Cl. Plate	44704-8265
<b>Approved for PP&amp;L</b>										
320	3/0 - 800 KCMIL	1/2 - 20 Stud	7	20.0	34.0	6.0	OH/UG	Steel	HD Cl. Plate	44707-02PP <sup>④</sup>
<b>Approved for PP&amp;L and UGI</b>										
320	3/0 - 800 KCMIL	1/2 - 20 Stud	4	20.0	34.0	6.0	OH/UG	Steel	HD Cl. Plate	44704-82



- ① All units are supplied with a ground lug.
- ② Bypass mechanism is lever-operated, jaw pressure release with 100% bypass capacity.
- ③ Disconnect sleeves should not be used with these devices.
- ④ These devices include anti-inversion clip in upper right hand jaw, #HS59676.



44707-02PP



48707-82GP

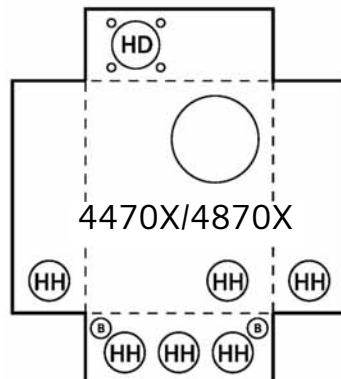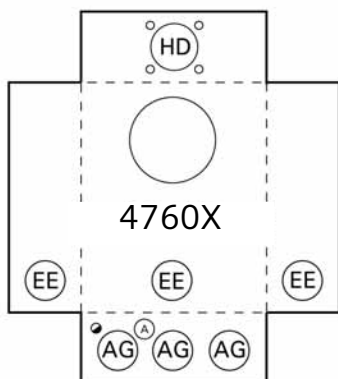

Knockouts (inches):	
●:	1/4
A:	1/2
B:	1/2, 3/4
AG:	3/4, 1, 1-1/4, 1-1/2, 2, 2-1/2, 3
EE:	2, 2-1/2, 3
HH:	2-1/2, 3, 3-1/2, 4
HD:	∅4, 281 HUB OP

