

# DRAIN CLEANING

## Drum Machines



### K-750 Drum Machine

For 3" to 8" (75-200 mm) Drain/Sewer Lines.

- Powerful, self-contained machine ideal for lateral lines. Easy to transport, minimal set-up – attach a tool and go.
- Autofeed advances, retrieves cable with a push of a lever, up to 20' (6 m) per minute.
- Versatile AUTOFEED® control adjusts for either 5/8" (16 mm) or 3/4" (20 mm) cable with a twist of a screwdriver.
- Cable spins at 200 RPM.
- Tough, corrosion-resistant cable drum withstands harsh treatment and abuse. It will not dent or corrode and cleans easily.
- Drum holds 100' (30.5 m) of 3/4" (20 mm) or 125' (35 m) of 5/8" (16 mm) cable and is designed for quick, easy removal.
- Well-balanced design gives machine a lightweight "feel." Transport wheels ease loading into service truck/van.
- Equipped with 550W induction motor.

### Standard 3/4" (20 mm) Tool Set Includes

- T-406 Spade Cutter
- T-407 Retrieving Auger
- T-411 2" (50 mm) Cutter
- T-413 3" (75 mm) Cutter
- T-414 4" (110 mm) Cutter

### Standard 5/8" (16 mm) Tool Set Includes

- T-403 3" (75 mm) P-Trap Cutter
- T-407 Retrieving Auger
- T-406 Spade Cutter
- T-411 2" (50 mm) Cutter
- T-413 3" (75 mm) Cutter
- Approved by CSA to CSA and UL Standards (115V only).
- Includes RIDGID PVC drain cleaning gloves and operators manual.


### Standard Equipment

- 41937 – RIDGID Leather Drain Cleaning Gloves.



### Machine Options

Catalog No.	Model No.	Description	Voltage		Weight	
			V	lb.	kg	
41977	K-750	Machine with Gloves and AUTOFEED - 3/4" Pigtail	115	114	51.9	
51402	K-750	Machine with Gloves and AUTOFEED - 5/8" Pigtail	115	113	51.3	
42002	K-750 w/C-75	Machine with One Pair of Gloves, AUTOFEED, Standard 3/4" Tool Set, and: C-75, 75' x 3/4" Cable	115	206	93.6	
42007	K-750	Machine with One Pair of Gloves, w/C-100 AUTOFEED, Standard 3/4" Tool Set, and: C-100, 100' x 3/4" Cable	115	234	106.3	
42012	K-750 w/C-27	Machine with One Pair of Gloves, AUTOFEED, Standard 5/8" Tool Set, and: C-27, 75' x 5/8" Cable	115	182	82.7	
47047	K-750 w/C-24	Machine with One Pair of Gloves, AUTOFEED, Standard 5/8" Tool Set, and: C-24, 100' x 5/8" Cable	115	182	82.7	
44202	K-750	Machine with Gloves and AUTOFEED - 3/4" Pigtail	230	114	51.9	
51407	K-750	Machine with Gloves and AUTOFEED - 5/8" Pigtail	230	113	51.3	
44212	K-750	Machine with One Pair of Gloves, w/C-100 AUTOFEED, Standard 3/4" Tool Set, and: C-100, 100' x 3/4" Cable	230	234	106.3	
44217	K-750 w/C-27	Machine with One Pair of Gloves, AUTOFEED, Standard 5/8" Tool Set, and: C-27, 75' x 5/8" Cable	230	182	82.7	

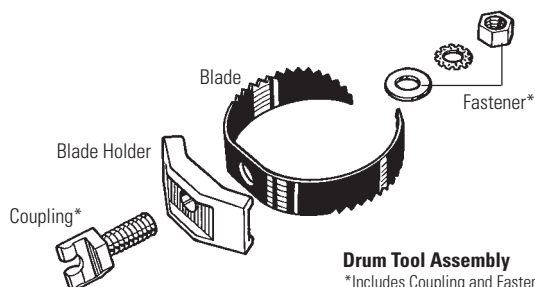









**Drum Tool Assembly**





\*Includes Coupling and Fastener

# DRAIN CLEANING





## Inner Core (IC) Cables

		Catalog No.	Model No.	Description	Weight	
					lb.	kg
5/8" 16 mm		92460	C-25	5/8" (16 mm) x 25' IC Cable (7.6 m)	24	10.9
		92465	C-26	5/8" (16 mm) x 50' IC Cable (15.2 m)	43	19.5
		92470	C-27	5/8" (16 mm) x 75' IC Cable (22.9 m)	63	28.6
		43647	C-24	5/8" (16 mm) x 100' IC Cable (30.5m)	84	38.1
3/4" 20 mm		92475	C-28	3/4" (20 mm) x 25' IC Cable (7.6 m)	30	13.9
		92480	C-29	3/4" (20 mm) x 50' IC Cable (15.2 m)	60	27.2
		41212	C-75	3/4" (20 mm) x 75' IC Cable (22.9 m)	93	42.5
		41697	C-100	3/4" (20 mm) x 100' IC Cable (30.5m)	122	55.3









## Hollow Core Cables

		Catalog No.	Model No.	Description	Weight	
					lb.	kg
5/8" 16 mm		32737	C-27HC	5/8" (16 mm) x 75' HC Cable (23)	52 <sup>3</sup> / <sub>4</sub>	23.9
		58192	C-24HC	5/8" (16 mm) x 100' HC Cable (30.5 m)	70 <sup>1</sup> / <sub>2</sub>	32.1
3/4" 20 mm		47427	C-75HC	3/4" (20 mm) x 75' HC Cable (23 m)	75	34.0
		47432	C-100HC	3/4" (20 mm) x 100' HC Cable (30.5 m)	100	45.5







## Leaders and Pig Tails

	Catalog No.	Model No.	Description	Weight lb.
	92555	T-458	5/8" (16 mm) x 2' (50 mm) Leader	2
	92560	T-468	3/4" (20 mm) x 2' (50 mm) Leader	2 <sup>3</sup> / <sub>4</sub>
	44122	-	5/8" (16 mm) Pigtail, 4 <sup>1</sup> / <sub>2</sub> ' (1.4 m) Long	2 <sup>1</sup> / <sub>2</sub>
	44117	-	3/4" (20 mm) Pigtail, 6' (1.8 m) Long	3 <sup>1</sup> / <sub>2</sub>















## Accessories

	Catalog No.	Model No.	Description	Weight	
				lb.	kg
	41982	A-7534	Drum Assembly w/3/4" (20 mm) Pigtail	37 <sup>1</sup> / <sub>2</sub>	17.0
	43637	A-7558	Drum Assembly w/5/8" (16 mm) Pigtail	33	15.0
	43642	A-75	AUTOFEED Assembly	8	3.5
	41937	-	RIDGID Leather Drain Cleaning Gloves	1/2	0.2
	41992	A-75PF	C-100IC Kit w/Tools, 3/4" (20 mm) x 100' (30.5 m)	8	3.5
	49032	-	Front Guide Hose Assembly	3	1.3
	59360	A-3	Tool Box	5	2.3
	70032	-	RIDGID PVC Drain Cleaning Gloves	1/2	0.2

## Repair Fittings

	Catalog No.	Model No.	Description	Weight	
				oz.	g
	31487	A-7570	5/8" (16 mm) Repair Splicer	1 <sup>1</sup> / <sub>2</sub>	43
	31492	A-7571	3/4" (20 mm) Repair Splicer	2	57
	92805	A-6582	5/8" (16 mm) Male Coupling	1	28
	92810	A-6583	5/8" (16 mm) Female Coupling	2	57
	92880	B-6840	3/4" (20 mm) Male Coupling	1	28
	92885	B-6841	3/4" (20 mm) Female Coupling	2	57

## Tools and Replacement Blades – Fit 5/8" (16 mm) and 3/4" (20 mm) Cables

	Catalog No.	Model No.	Description	Replac. Blade(s)	Replac. Holder
	92485	T-403	P-Trap Cutter, 3" (75 mm)	92835	92900
	92490	T-404	P-Trap Cutter, 3 <sup>1</sup> / <sub>2</sub> " (87 mm)	92840	92900
	92495	T-406	Spade Cutter, 1 <sup>3</sup> / <sub>4</sub> " (45 mm)	92850	92915
	92500	T-407	Retrieving Auger 2 <sup>3</sup> / <sub>8</sub> " (65 mm)	-	-
	92505	T-408	Sawtooth Cutter, 3" (75 mm)	92890	92915
	51762	T-409	H-D Bulb Auger, 1 <sup>3</sup> / <sub>4</sub> " (45 mm)	-	-
	92510	T-411	Double Cutter, 2" (50 mm)	92815	92905
	92515	T-412	Double Cutter, 2 <sup>1</sup> / <sub>2</sub> " (65 mm)	92820	92905
	92520	T-413	Double Cutter, 3" (75 mm)	92825	92910
	92525	T-414	Double Cutter, 4" (110 mm)	92830	92910
	92530	T-416	Double Cutter, 6" (150 mm)	92855	92910
	92540	T-433	3-Blade Cutter 3" (75 mm)	92865	92895
	92545	T-434	3-Blade Cutter 4" (110 mm)	92870	92895
	92550	T-436	3-Blade Cutter 6" (150 mm)	92875	92895