

## CERTIFIED LEAD FREE - Models 800LF - 818LF 800LF Series Deluxe Frost-Proof Yard Hydrant



- 3/4" or 1" NPT Female Inlet.
- 3/4" Male Hose Thread Outlet.
- Cast Iron Head and Handle...with Blue Polyester Powder Coated Finish.
- Maximum Pressure 120 PSI.
- Many Parts and Accessories are Common for all Models.
- Yard hydrant accessories...See page 37 and 46.
- Yard Hydrant Lengths...See Page 50.

MADE IN U.S.A. WITH U.S. AND IMPORTED COMPONENTS





Certified by Truesdail Laboratories. Meets all Federal and State Safe Drinking Water Acts and requirements. **Does not meet California Prop. 65 (Environmental Law).**

**All Simmons Yard Hydrants are Individually Boxed.**

3/4" Inlet Part No.	1" Inlet Part No.	Bury Depth	Weight Each lbs.
800LF	810LF	1	11.9
801LF	811LF	1 1/2	13.5
802LF	812LF	2	14.5
803LF	813LF	3	16.8
804LF	814LF	4	18.9
805LF	815LF	5	21.2
806LF	816LF	6	23.4
807LF	817LF	7	25.7
808LF	818LF	8	28.2

### Flow Rates:

(For All Simmons Yard Hydrant Models except 6800)

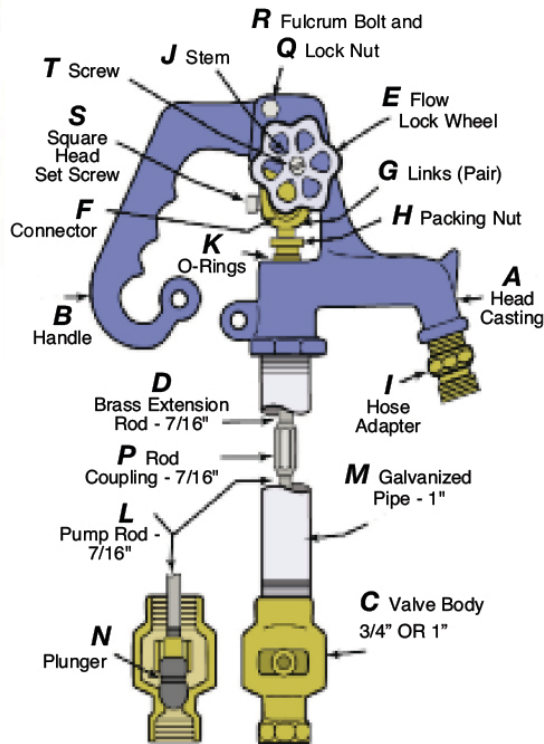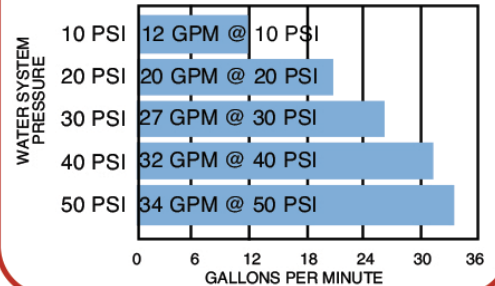

### Parts Kit...



### CERTIFIED LEAD FREE 800LF Series Yard Hydrant Parts

Ref.	No.	Name of Part
	850SB	Parts Kit
	840	Head Complete
A	8820	Head
B	8821	Handle
C	8832	Valve Body (3/4")
	8832A	Valve Body (1")
D	8843	Extension Rod, 7/16"
E	8824*	Flow Lock Wheel
F	8825*	Brass Connector
G	8826*	Brass Links, Pair
H	8847*	Brass Packing Nut
I	8844	Hose Adapter
J	8829*	Brass Stem, Square Head
K	8839-	Buna-N "O" Rings, Pair
L	8814	Pump Rod, 7/16"
M	8815	Galvanized Pipe Casing, 1"
N	8842-	Plunger (One Piece)
P	8834	Rod Coupling, 7/16"
Q	8301-	Stainless Steel Lock Nut
R	8836-	Fulcrum Bolt Stainless Steel
S	8837-	Set Screw (Square Head S.S.)
T	8610*	Screw for Flow Lock Wheel

\*Included in Parts Kit.

\*These parts make up the flow lock wheel assembly.