

6" Line Voltage Recessed Can

New Construction IC Airtight

RH6/N/IC/ATS

PRODUCT SPECIFICATIONS

LAMP
75 Watt Max



PLASTER FRAME/HOUSING
Plaster frame is galvanized steel. The housing is steel. The housing can be removed from the plaster frame to provide access to the junction box.



INSTALLATION

BAR HANGER
Pre-installed nails easily install in regular or engineered lumber. Bar hangers are adjustable from 13-5/8" to 25" and can be repositioned 90 degree on plaster frame.

JUNCTION BOX
Listed for through branch circuit wiring. Contains seven 7/8" knockouts and four Romex pryouts with strain relief.

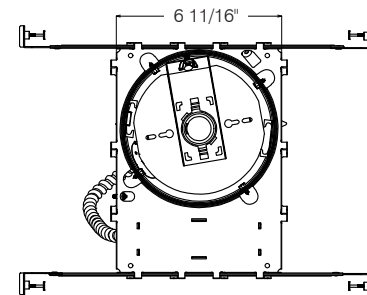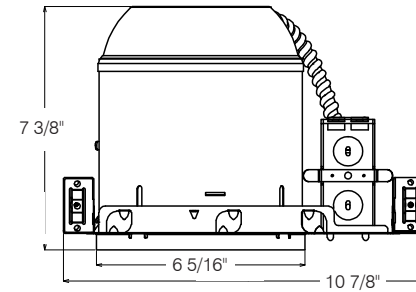

LABELS AND LISTINGS

UL Listed for Damp Location
UL Listed for Feed Through wiring
Certified under ASTM-E283 for Airtight construction



ORDERING INFORMATION

Code: 78516
Item # RH6/N/IC/ATS
Topaz offers numerous lamp options.
Consult your sales rep.

6" Line Voltage Recessed Can

New Construction Shallow Non-IC

RH6/N/S

PRODUCT SPECIFICATIONS

LAMP
120 Watt Max

PLASTER FRAME
Galvanized steel construction. The housing can be removed from plaster frame to provide access to the junction box.



THERMAL PROTECTOR
Self resetting thermal protector deactivates fixture if overheating occurs due to improper lamping or misapplied insulation



INSTALLATION

BAR HANGER
Pre-installed nails easily install in regular or engineered lumber. Bar hangers are adjustable from 13-5/8" to 25" and can be repositioned 90 degree on plaster frame.

JUNCTION BOX
Listed for through branch circuit wiring. Contains seven 7/8" knockouts and four Romex pryouts with strain relief.

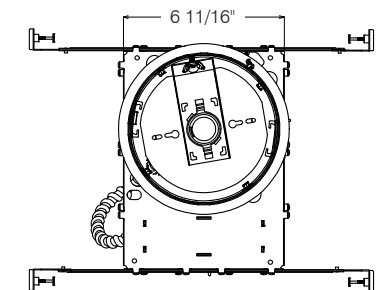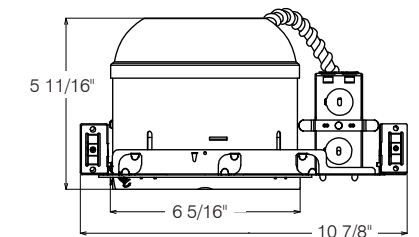

LABELS AND LISTINGS

UL Listed for Damp Location
UL Listed for Feed Through wiring



ORDERING INFORMATION

Code: 72211
Item # RH6/N/S
Topaz offers numerous lamp options.
Consult your sales rep.